



narex

PRODUCT CATALOG

valid from January 2025



Narex through the Generations

The driving thought behind the development and manufacture of all our tools is always the desire to fulfil the needs of our customers. That is one of the reasons Narex tools have retained their popularity through the generations. They are renowned for their long life, high quality, and safety.


But we work tirelessly to live up to this reputation. And we succeed in doing so in part thanks to our precise methodology – from development and prototyping to production audits, to final testing and feedback. The latter in particular is crucial so that we can learn more, continuously improve our products, and create tools fit for future generations.

Traditional brand | *80 years on the market* | *Czech and Slovak team* | *Over 400 dealers in Czechia and Slovakia* |
Professional service | *Long availability of spare parts* | *Over 100 machines, 1,000 accessories* |
3,000 spare parts | *Consulting in tools, servicing, and spare parts*

Narex s.r.o.

Chelčického 1932, 470 01 Česká Lípa / Czech Republic / Phone: +420 481 645 471-2, +420 481 645 227 /
E-mail: narex@narex.cz / www.narex.cz

SALES OUTLETS OF FOREIGN SELLERS

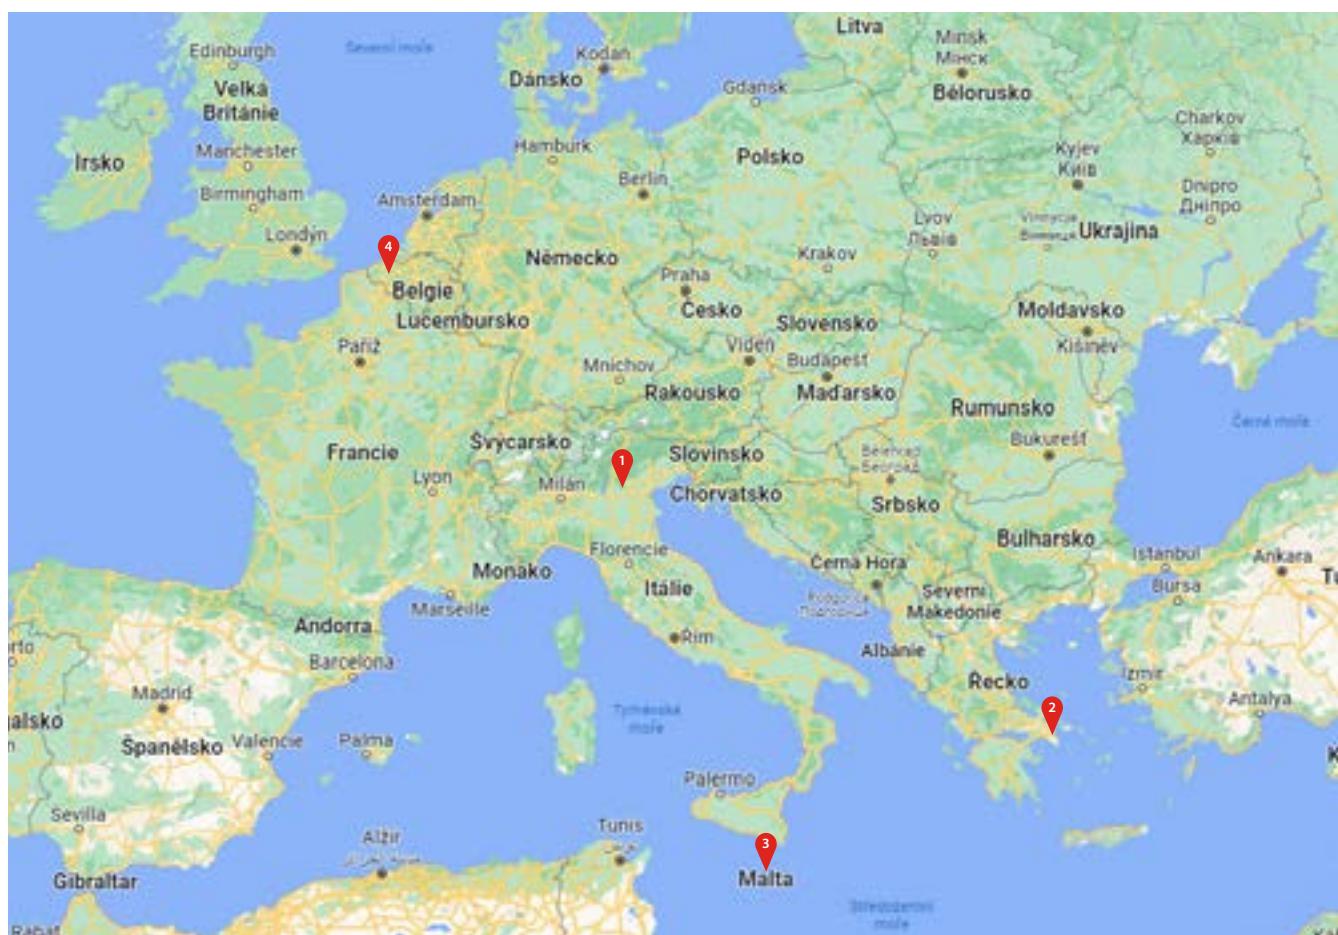

1 BORGА ITALIA srl
 Via Monte Ortigara 27/a
 36073 Cornedo Vicentino
 Phone: +445 480 220
 acquisti@borgaitalia.it
Italy

2 Hellenic Tool Center
 Driodon str. 4, 14122
 Neo Iraklio
 Phone: 697 7485988
 E-mail: p.megas@festool.gr
Greece

3 C&C Technique Ltd
 Marina Milling Complex
 Marsa Industrial Estate
 3000 Marsa
 Phone: +35 625607126
 wayne.camilleri@cctechnik.com.mt
Malta

4 VAMATEC
 De Tonne (Ind Zone 5) 89-91
 9800 Deinze
 Phone: +32 496260539
 magazijn@vamatec.be
Belgium



◀ IN THE KNOW ON TOOLS SINCE 1943 ▶

You can find our blue-orange tools in nearly every Czech or Slovak workshop. We began writing their history more than 80 years ago back home in Česká Lípa.

As time passed...

1943	1946	1947	1961	1968	1975	1983-1987	1989
The Elmowerk IV factory on Moskevská Street releases its first drills which are sold under the name EV 210 even 10 years later. The factory is owned by Siemens Schuckertwerke A.G. based in Berlin.	In May the factory becomes a part of state enterprise Elektro-Praha in Prague. It goes on to manufacture 21,000 power tools, including mining drills powered by a 3-phase motor, which remain in production until the start of the 1990s.	The factory becomes part of state enterprise ČKD Praha. The portfolio expands with the manufacture of fans, dental model trimmers and dental chairs, as well as compressors and commutators for small electric motors.	The factory passes to state enterprise Nářadí Praha (later Narex Praha) as the 70 th factory. It remains in its ownership until November 1990.	Beginning of the 1 st stage of construction of a new factory on Chelčický Street. It is completed in 1971. The product range expands with the addition of 23 mm Ø and 32 mm Ø drills, as well as drill attachments and stands for hobbyists. These are also manufactured for Bosch in Germany.	The beginning of production of the first ever drill with an all-plastic housing made from two separate halves, designated EV 508 D, or EC 508 D with hammer action.	2 nd stage of construction of the factory on Chelčický Street. 1985 marks the start of production of EV 16 and EV 16-25 drills and EZ 12-5 tappers; 1986 brings the EBU 15 and EBO 10 grinder and 1987 the popular EPK 16 circular saw and the much anticipated EVK 28-S and EVK 35-S hammers for the construction industry.	The factory becomes a manufacturing firm within state enterprise Narex Praha. Conclusion of the 3 rd stage of construction on Chelčický Street, which then houses all production. The portfolio expands with MP150 drills with a 750 W motor which feature smooth electronic speed regulation.
1991	1993	1994	2002	2013	2016	2017	2018
A joint-stock company named Narex Česká Lípa, a.s. is founded on 1 January 1991. At first, the only stock holder is the state.	A daughter company, Narex Slovakia s.r.o. is founded on 1 April in Žilina. The company enters a long-term partnership with German firm Festo KG from Esslingen.	At the end of the year, the majority of stocks is acquired by German company Festo Tooltechnic Beteiligungen GmbH.	A new line of drills, versions F and E, enter production as a successor to the timeless machines built around model EVP 13 C-2H3.	Narex expands its product portfolio with the addition of the first magnetic drill EVM 32 and introduces the third generation of advanced cordless equipment.	The company's successful long-running side project focusing on electric chainsaws is supplemented by the addition of high-speed models.	A new centralised Narex service centre is established. Narex introduces the most compact angle grinders and most powerful impact wrenches on the world market.	Narex introduces the first hybrid screwdriver in the world - the AS 37-Li HYBRO.
2021	2022	2023	2024				
Introduction of the unique 60 V BRUSH-LESS cordless angle grinders.	Narex introduces a new product line called Camouflage.	Narex introduces its new range of cordless garden tools.	Narex returns entirely to Czech hands and once again has Czech owners.				

60V JUMBO POWER ACCUMULATOR LINE

CORDLESS EQUIPMENT - 60 V BASIC MACHINES



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
ASP 600-2B Basic Box BRUSHLESS	60 V/card- board box	Impact drill, max. 130 Nm, 13 mm	65 405 314	3-year warranty 28
ASR 600-3SB Basic Box BRUSHLESS	60 V/card- board box	Impact wrench, max. 540 Nm, 1/2", 3 oper. modes	65 405 320	3-year warranty 30
ASR 600-3MTB Basic Box BRUSHLESS	60 V/card- board box	Impact wrench, max. 1 000 Nm, 1/2", 3 oper. modes	65 405 696	3-year warranty 32
ASR 600-3HTB Basic Box BRUSHLESS	60 V/card- board box	Impact wrench, max. 1 690 Nm, 3/4", 3 oper. modes	65 405 328	3-year warranty 34
ABU 125-600 B Basic Box BRUSHLESS	60 V/card- board box	Angle grinder, max. 125 mm, brake, FastFix nut	65 405 678	3-year warranty 20
ABU 150-600 3B Basic Box BRUSHLESS	60 V/card- board box	Angle grinder, max. 150 mm, 3 speed settings, brake, FastFix nut	65 405 684	3-year warranty 22
ABU 230-600 B Basic Box BRUSHLESS	60 V/card- board box	Angle grinder, max. 230 mm, brake, FastFix nut	65 405 690	3-year warranty 24

CORDLESS IMPACT WRENCHES 20 V



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
ASR 200-5B Basic Box BRUSHLESS	20 V / card- board box	Max. 300 Nm, 1/2", basic machine only	65 405 308	3-year warranty 41
ASR 203-5B BRUSHLESS	20 V / case	Max. 300 Nm, 1/2", 2x Li-Ion 3.0 Ah, charger	65 405 309	3-year warranty 40
ASR 200-3SB Basic Box BRUSHLESS	20 V / card- board box	Max. 260 Nm, 1/2", 3 oper. modes, basic machine only	65 405 311	3-year warranty 41
ASR 203-3SB BRUSHLESS	20 V / case	Max. 260 Nm, 1/2", 3 oper. modes, 2x Li-Ion 3.0 Ah, charger	65 405 312	3-year warranty 40

CORDLESS IMPACT DRILLS/DRIVERS 20 V



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
ASP 200-2 Basic Box	20 V / card- board box	Max. 47 Nm, 13 mm, 2 speed settings, basic machine only	65 405 294	3-year warranty 39
ASP 202-2B BRUSHLESS	20 V / case	Max. 67 Nm, 13 mm, 2 speed settings, 2x Li-Ion 2.0 Ah, charger	65 405 304	3-year warranty 38
ASP 203-2B BRUSHLESS	20 V / case	Max. 67 Nm, 13 mm, 2 speed settings, 2x Li-Ion 3.0 Ah, charger	65 405 305	3-year warranty 38

CORDLESS DRILLS/DRIVERS 20 V



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
ASV 200-2 Basic Box	20 V/card- board box	Max. 47 Nm, 13 mm, 2 speed settings, basic machine only	65 405 290	3-year warranty 39
ASV 200-2B Basic Box BRUSHLESS	20 V/card- board box	Max. 67 Nm, 13 mm, 2 speed settings, basic machine only	65 405 298	3-year warranty 39
ASV 202-2B BRUSHLESS	20 V/case	Max. 67 Nm, 13 mm, 2 speed settings, 2x Li-Ion 2.0 Ah, charger	65 405 299	3-year warranty 38
ASV 203-2B BRUSHLESS	20 V/case	Max. 67 Nm, 13 mm, 2 speed settings, 2x Li-Ion 3.0 Ah, charger	65 405 301	3-year warranty 38

◀ CORDLESS LIGHT 12 V ▶



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
AS 120 Basic Box	12 V/card-board box	1 W, 8 500 lux / 1 m, basic machine only	65 405 521	3-year warranty 42

◀ CORDLESS IMPACT WRENCHES, 12 V ▶



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
ASR 120-S Basic Box	12 V/card-board box	Max. 139 Nm, 3/8", basic machine only	65 405 473	3-year warranty 43
ASR 122-S	12 V/case	Max. 139 Nm, 3/8", 2x Li-Ion 2.0 Ah, charger	65 405 474	3-year warranty 42

◀ CORDLESS POCKET SCREWDRIVERS, 12 V ▶



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
ASV 122-SET (ASV 120-2 + AS 120)	12 V/case	Max. 35 Nm, 10 mm, 2 speed settings, 2x Li-Ion 2.0 Ah, charger	65 405 519	3-year warranty 42

◀ CORDLESS JOBSITE RADIO 7.2 V ▶



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
BT-02	7.2 V/card-board box	AC/DC, 2x 10 W, built-in Li-Ion 4.8 Ah accumulator	65 405 613	162

◀ CORDLESS HYBRID DRIVERS 3.6 V ▶



TYPE	VOLTAGE/ PACKAGING	DESCRIPTION	No.	PAGE
AS 37 HYBRO LADY	3.6 V/blister pack	Max. 3/10 Nm, 1/4" HEX, built-in Li-ion 0.85 Ah accumulator	65 406 028	3-year warranty 45
AS 37-Li HYBRO	3.6 V/blister pack	Max. 4/10 Nm, 1/4" HEX, built-in Li-ion 0.85 Ah accumulator	65 405 670	3-year warranty 47
AS 37-2 HYBRO EVO	3.6 V/case	Max. 5/15 Nm, 1/4" HEX, built-in Li-ion 1.0 Ah accumulator	65 405 672	3-year warranty 46

◀ NON-IMPACT DRILLS ▶



TYPE	INPUT POWER	DRILLING Ø FOR STEEL/WOOD	No.	PAGE
EV 13 F-H3	650 W	13/25 mm	00 624 196	57
EV 13 E-2H3	650 W	13/35 mm	00 624 193	58
EV 13 G-2	760 W	13/45 mm	65 404 729	59

IMPACT DRILLS



TYPE	INPUT POWER	DRILLING Ø FOR STEEL/BRICKWORK/WOOD	No.	PAGE
EVP 13 E-2H3	650 W	13/16/35 mm	00 624 029	60
EVP 13 G-2H3	760 W	13/20/45 mm	00 631 549	61
EVP 13 G-2A (T-Loc)	760 W	13/20/45 mm	65 403 763	62
EVP 13 H-2C	1100 W	16/24/45 mm	00 763 321	63
EVP 16 K-2	1050 W	20/32/55 mm	00 765 486	64

MAGNETIC DRILL



TYPE	INPUT POWER	MAX. DRILLING Ø (spiral/ core drill bit)/TOOL HOLDER	No.	PAGE
EVM 32	900 W	13/32 mm (19 mm Weldon)	65 403 533	78
EVM 40-2 M	1150 W	18/40 mm (MK 2, 19 mm Weldon)	65 403 930	80
EVM 32-2 RLE	1150 W	13/32 (19 mm Weldon)	65 404 954	79

ROTARY HAMMERS



TYPE	INPUT POWER/ IMPACT POWER	MAX. DRILLING Ø FOR CONCRETE/BRICKWORK	No.	PAGE
EKV 21 (SDS-Plus)	700 W/2,3 J	20/20 mm	65 404 580	83
EKK 31-QS (SDS-Plus)	850 W/4,0 J	30/82 mm	65 404 582	84

IMPACT WRENCHES



TYPE	INPUT POWER/MAX. TIGHTENING TORQUE	TOOL HOLDER/USE RANGE	No.	PAGE
ESR 500 (T-Loc)	480 W/570 Nm	1/2"/M10-M22	65 404 193	87
ESR 800 (T-Loc)	500 W/1100 Nm	1/2"/M12-M30	65 404 195	88

ANGLE GRINDERS



TYPE	INPUT POWER	MAX. DISC Ø	No.	PAGE
EBU 125-7	720 W	125 mm	65 404 592	91
EBU 125-10	950 W	125 mm	65 404 596	92
EBU 125-12 C	1200 W	125 mm	65 403 735	96
EBU 125-14 C	1400 W	125 mm	65 403 736	97
EBU 125-14 CE	1400 W	125 mm	65 403 737	98
EBU 150-16	1600 W	150 mm	65 405 523	99
EBU 15-16 C	1600 W	150 mm	00 778 112	100
EBU 230-26	2600 W	230 mm	65 404 598	101
EBU 230-23 HD	2300 W	230 mm	65 406 054	102
EBU 230-26 HD	2600 W	230 mm	65 405 900	103

► STRAIGHT GRINDERS ►



TYPE	INPUT POWER	MAX. ROTARY TOOL Ø	No.	PAGE
EBD 30-8	700 W	25 mm	00 763 327	112
EBD 30-8 E	700 W	25 mm	00 763 325	112

► JIG SAW ►



TYPE	INPUT POWER	DEPTH OF CUT IN WOOD	No.	PAGE
EPL 12-7 BE	720 W	200 mm	65 404 742	115

► SABRE SAWS ►



TYPE	INPUT POWER	DEPTH OF CUT IN WOOD	No.	PAGE
EPO 150	800 W	150 mm	65 406 029	126
EPO 210	1 200 W	210 mm	65 406 031	127

► CIRCULAR SAW ►



TYPE	INPUT POWER	DISC Ø/DEPTH OF CUT IN WOOD	No.	PAGE
EPK 18	1 400 W	185/60 mm	65 406 042	130

► SAW CHAIN ►



TYPE	INPUT POWER	GUIDE BAR LENGTH	No.	PAGE
EPR 350-24 (14 m/s)	2 400 W	350 mm	65 406 050	136
EPR 400-24 (14 m/s)	2 400 W	400 mm	65 406 052	137

► VACUUM CLEANERS ►



TYPE	INPUT POWER	CONTAINER VOLUME	No.	PAGE
VYS 21-01	1 000 W	20 l	65 403 607	141
VYS 25-21	1 200 W	25 l	65 403 609	142
VYS 33-71 L (Auto Clean)	1 250 W	30 l	65 404 591	143

► STIRRER ►



TYPE	INPUT POWER	MAX. PADDLE Ø	No.	PAGE
EMX 1600	1 600 W	140 mm	65 406 434	149

◀ LED FLASHLIGHTS ▶

TYPE	DESCRIPTION	No.	PAGE
	3LED-IFL Telescopic LED pocket inspection lamp. Working reach up to 58 cm, luminous flux of 21 lumen, beam distance of up to 10 m, magnetic head, metal pocket clip, weight of 96 g incl. 4x LR44 batteries.	65 900 511	156
	FL LED 10 M Multi-functional FLAT LED torch with a wide range of uses thanks to three lighting modes: 1 - work light (1,200 lm) for lighting open spaces with beam distance of up to 100 m, 2 - work light with power reduced to 50% (500 lm), 3 - spotlight (220 lm) for work in confined and hard-to-reach places. For indoor and outdoor use - resistant to spraying water (IP 54) and impact (IK 07). Simple charging via a USB cable from the mains or from other compatible devices with a USB port (PC, power bank, laptop, car, etc.). Active run time up to 6 h, charge time 180 min, 3.7 V voltage, 6.7 Ah capacity. Weight 440 g.	65 404 610	157
	HL 400 SENSOR Rechargeable two-beam head lamp with sensor. This compact head lamp combines a 200 lm/6 h spotlight with a 400 lm/4 h, 200 lm/8 h or 20 lm/35 h floodlight. 60° vertical adjustment. Smart sensor for touchless control of the light. Comfortable elastic strap, fully adjustable LED charging indicator. IP56 and IK07 rated. 3.7 V, 1,500 mAh Li-Polymer-USB C accumulator, 2.5 h charge time. Weight 0.11 kg.	65 406 059	153
	FL 700 SLIM Folding rechargeable slim lamp with light intensity regulation. The lamp marries thin design with multi-axis rotation and tilting by 180°. The luminous flux of the main light can be regulated from 70 lm (16 h) to 700 lm (2 h), with the spotlight offering light intensity of 120 lm (9 h). Ergonomic anti-slip handle for a comfortable grip. Built-in magnet and rotary hook. LED charging indicator. IP54 and IK07 rated. 3.7 V, 2,600 mAh Li-Ion-USB C accumulator, 4 h charge time. Weight 0.37 kg.	65 406 061	151
	FL 1000 MULTI Multi-functional rechargeable inspection light. Versatile work light with three luminous flux settings for the main light 250 lm (8 h) / 500 lm (4 h) / 1,000 lm (2 h) and a spotlight with luminous flux of 200 lm (7 h). Folding magnetic base with 180° rotation. Ergonomic anti-slip handle for a comfortable grip. Built-in magnets and two integrated rotary hooks on the back of the light. LED charging indicator. IP65 and IK09 rated. 3.6 V, 3,350 mAh Li-Ion-USB C accumulator, 4.5 h charge time. Weight 0.38 kg.	65 406 062	152

◀ REFLECTORS ▶

TYPE	DESCRIPTION	No.	PAGE
	FL LED 50 ACU Cordless multi-functional spotlight with DUAL SYSTEM power supply: powered by cable from a socket / by a Li-Ion accumulator, work light power 50 W, max. luminous flux 5,200 lm, accumulator voltage 7.4 V, accumulator capacity 8.8 Ah, charge time ca. 180 min, POWER BANK with a USB port, automatic capacity indicator, button control panel for the spotlight with luminous flux reduced down to 2,250 lm (50%), stable tilting frame with integrated industrial magnets, option for tripod connection, IP54 and IK07 enclosure rating.	65 404 612	158
	FL 1400 FLEXI Flexible rechargeable pocket floodlight. The light offers three lighting modes with different intensities - 350 lm (8 h)/700 lm (4 h)/1,400 lm (2.5 h) - to provide optimal lighting in various conditions. Flexible 360° rotary base with a powerful magnet. Ergonomic shaped handle provides a comfortable grip for one hand (BOXER). LED charging indicator. IP65 and IK07 rated. 3.7 V, 5,200 mAh Li-Ion-USB C accumulator, 4 h charge time. Weight 0.45 kg.	65 406 063	154
	RL 3000 MAX Multi-functional rechargeable floodlight with a power bank. Compact floodlight with a stand made of cast aluminium and with a unique jointed system for tilting the light up to 90° vertically and 360° horizontally. Above-standard luminous flux range of 750 lm (5.5 h)/1,500 lm (3.5 h)/3,000 lm (2 h). Integrated power bank - max. 5 V/2 A. Practical handle for comfortable portability. LED charging indicator. IP65 and IK07 rated. 7.4 V, 4,400 mAh Li-Ion DC 15V/1.5 A accumulator, 3.5 h charge time. Weight 1.45 kg.	65 406 064	155

► BIT SETS WITH RATCHETS ►



TYPE	DESCRIPTION	No.	PAGE
SH 49-14	49-piece set of heads with a ratchet	65 404 189	164
SH 60-1412	60-piece set of heads with a ratchet	65 404 190	164

► WORK GLOVES ►



TYPE	DESCRIPTION	No.	PAGE
MG-L		00 648 610	165
MG-XL	Protective work gloves with vibration absorbent neoprene palm padding and a wrist strap.	00 649 087	165
MG-XXL		00 765 495	165
MG-XXXL		65 403 690	165

► TAPE MEASURES ►



TYPE	DESCRIPTION	No.	PAGE
ABX 3	Ergonomic tape measure with AUTO BRAKE lock and rubberised grip surface - 3 m	65 405 274	165
ABX 5	Ergonomic tape measure with AUTO BRAKE lock and rubberised grip surface - 5 m	65 405 276	165

► RUBBER EXTENSION CABLES ►



TYPE	DESCRIPTION	No.	PAGE
PBN 25	Rubber extension cable with reel and fixed central panel. 25 m long, 4 covered sockets, H05RR-F 3G 1.5 mm ² wire, max. load of 3,200 W, IP 44 rated. Weight 4.5 kg.	65 404 963	163
PBN 50	Rubber extension cable with reel and fixed central panel. 50 m long, 4 covered sockets, H05RR-F 3G 1.5 mm ² wire, max. load of 3,200 W, IP 44 rated. Weight 9.5 kg.	65 404 962	163

20 V CAMOUFLAGE ACCUMULATOR LINE

SETS WITH BATTERIES AND CHARGERS ▶



TYPE	DESCRIPTION	No.	PAGE
MIX SET-CMFL GARDEN	8-piece set of power tools, accumulators, and chargers. Set contains: CST 430 lawn mower (1 pc), CVT 300 string trimmer (1 pc), CPP 550 hedge trimmer (1 pc), CB 2 Li-ion 2.0 Ah accumulator (1 pc), CB 4 Li-ion 4.0 Ah accumulator (2 pcs), CN 20 charger (2 pcs)	65 406 441	169
CPR 350 4BN	CPR 350 Chainsaw, CB 4 (2 pcs) accumulator, CN 20 (1 pc) charger	65 406 735	169
CST 430 4BN	CST 430 Lawn mower, CB 4 (2 pcs) accumulator, CN 20 (1 pc) charger	65 406 734	169
CPP 550 2BN	Nůžky na živý plot CPP 550, CB 2 (2 pcs) accumulator, CN 20 (1 pc) charger	65 406 736	169
CVT 300 2BN	Strunový vyžínač CVT 300, CB 2 (1 pc) accumulator, CN 20 (1 pc) charger	65 406 737	169

CORDLESS EQUIPMENT - BASIC MACHINES ▶



TYPE	DESCRIPTION	No.	PAGE
CSV 13-2 Basic Box BRUSHLESS	20 V, drill driver, BRUSHLESS, max. 65 Nm, 1.5–13 mm chuck	65 405 714	193
CSP 13-2 Basic Box BRUSHLESS	20 V, impact driver, BRUSHLESS, max. 75 Nm, 1.5–13 mm chuck	65 405 716	195
CSR 350-3S Basic Box BRUSHLESS	20 V, impact wrench, BRUSHLESS, 1/2" square, max. 350 Nm, 3 power modes	65 406 339	189
CKK 22 Basic Box BRUSHLESS	20 V, combined hammer, BRUSHLESS, SDS-PLUS, 2.2 J, max. Ø in concrete 22 mm	65 405 726	197
CBU 125 Basic Box BRUSHLESS	20 V, angle grinder, BRUSHLESS, max. disc Ø 125 mm, 8,000 rpm	65 405 720	199
CPR 350 Basic Box BRUSHLESS	2x 20 V chain saw, 350 mm bar, chain speed 15 m/s, FastFix tensioning, automatic lubrication, LED panel	65 406 393	179
CPK 65 Basic Box BRUSHLESS	20 V, circular saw, BRUSHLESS, disc Ø 185 mm, depth of cut 65 mm	65 405 724	205
CPO 150 Basic Box BRUSHLESS	20 V, sabre saw, BRUSHLESS, 3,000 rpm, max. depth of cut 150 mm	65 405 718	201
CPL 90 Basic Box BRUSHLESS	20 V, jig saw, BRUSHLESS, max. depth of cut 90 mm, 4 pendulum action levels	65 405 722	203
CPM 3E Basic Box	20 V, oscillating multitool, 3°, 19 000 strokes/min, Starlock	65 406 341	181
CBE 125-3 Basic Box BRUSHLESS	20 V, eccentric sander, BRUSHLESS, Ø 125 mm, 1.25 mm stroke length, 3 speed settings, Fast Fix	65 406 345	185
CBD 140 Basic Box	20 V, orbital sander - delta, 135 x 93 mm, 1.1 mm stroke length, Fast Fix	65 406 347	183
CVP 10-2 Basic Box BRUSHLESS	20 V, 2-in-1 vacuum cleaner, BRUSHLESS, 10 l container, 2 speed settings, 10/15 kPa suction power	65 406 337	191
CVF 230-3 Basic Box	20 V, 2-in-1 blower, 63.5 m/s air speed, 4.5 kPa suction power, 3 speed settings	65 406 349	187
CST 430 Basic Box BRUSHLESS	2x 20 V lawn mower for plots under 500 m ² , swath 430 mm, mowing height 25–75 mm, 50 l collector, LED panel	65 406 395	173
CVT 300 Basic Box	20 V string trimmer, telescopic, 7 head tilt positions, rotary handles, max. string swath 300 mm	65 406 397	175
CPP 550 Basic Box BRUSHLESS	2x 20 V hedge trimmer, 550 mm trimmer blade, tooth pitch 28 mm, rotary handle (5 positions), LED panel	65 406 399	177
CR LED 20 Basic Box	20 V, work light, LED, 20 W, 2,000 lm, USB for a power bank	65 405 728	207
CBT-02	7.2 V, jobsite radio, 100–240 V, powerbank 5 V/2.5 A	65 406 326	209

◀ ACCUMULATORS AND CHARGERS ▶



TYP	POPIS	OBJ. ČÍSLO	STRANA
CB 2	Li-ion 20 V/2,0 Ah accumulator	65 405 968	169
CB 4	Li-ion 20 V/4,0 Ah accumulator	65 405 737	169
CN 20	Charger for CB 2, CB 4	65 405 736	169
START SET-CMFL	3dílná startovací sada akumulátorů a nabíječky. Sada obsahuje: Li-Ion 4,0 Ah akumulátor CB 4 (2 ks), nabíječku CN 20 (1 ks)	65 406 019	169

◀ WORK ACCESSORIES ▶




TYP	POPIS	OBJ. ČÍSLO	STRANA
CTP 50	Tool bag - 25 kg load-bearing capacity, 50 l volume	65 405 730	211
CRP XL	Work gloves - size XL	65 405 729	211
CRP 2XL	Work gloves - size 2XL	65 406 317	211
CHJ-L SET	Heated softshell jacket - size L, setové provedení vč. powerbanky PWB 10	65 406 039	210
CHJ-XL SET	Heated softshell jacket - size XL, setové provedení vč. powerbanky PWB 10	65 406 040	210
CHJ-2XL SET	Heated softshell jacket - size 2XL, setové provedení vč. powerbanky PWB 10	65 406 041	210
CHJ-3XL SET	Heated softshell jacket - size 3XL, setové provedení vč. powerbanky PWB 10	65 406 321	210
PWB 10	Power bank for CHJ, Li-Pol 10,000 mAh, input: micro USB, USB-C, output: 2x USB 5V/2 A	65 406 026	210



CORDLESS TOOLS



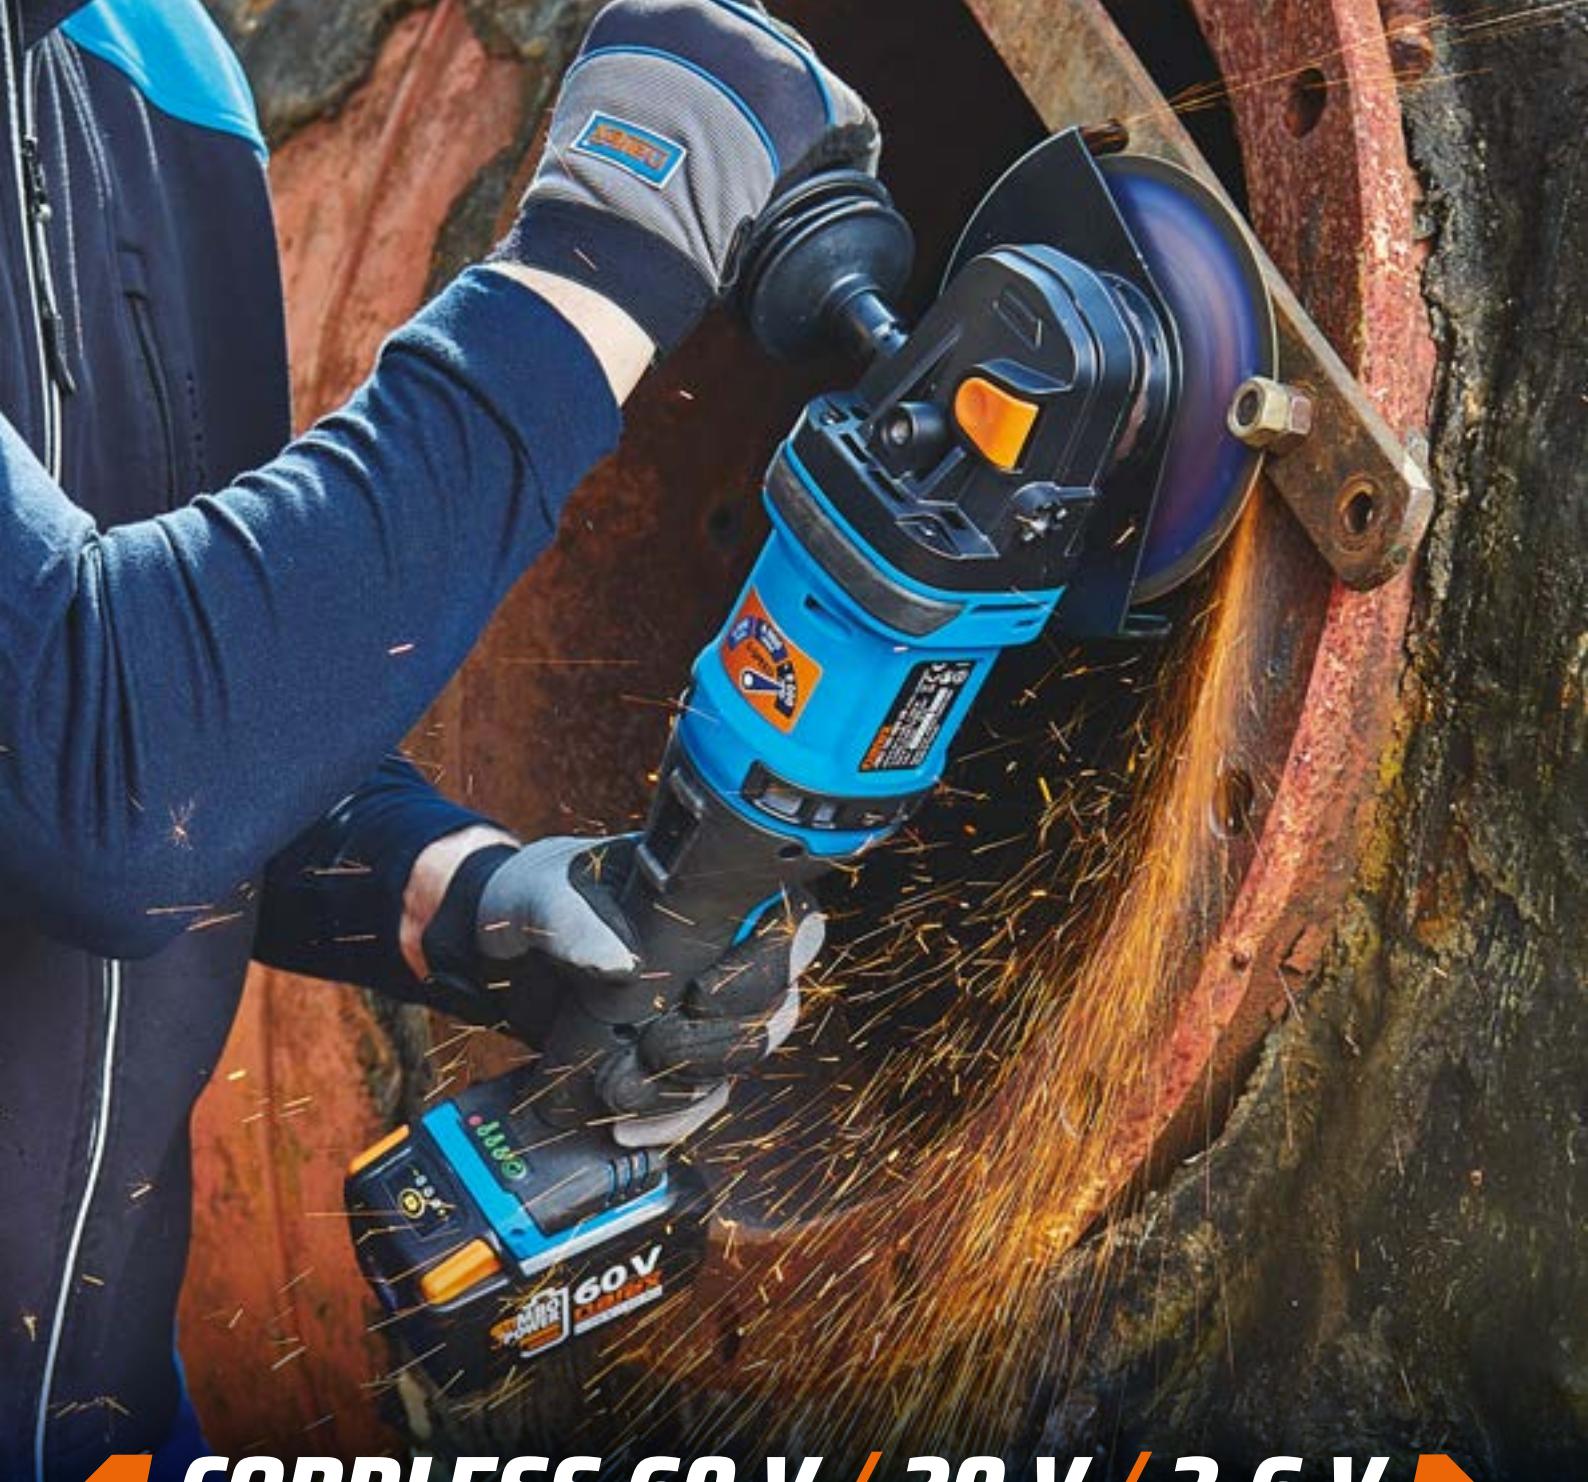

◀ CORDLESS 60 V / 20 V / 3.6 V ▶

- ▶ Since their inception in the early 1970s, when the first battery-powered drill was developed and tested at Earth's orbit for the needs of the American space programme, accumulator-powered tools have undergone one of the most dynamic transformations in the history of electric hand-held tools.
- ▶ A truly meteoric rise and boom came when accumulator tools reached the many branches of industrial production. Constant innovation that occurs in this field brought new opportunities for using accumulator tools, but also increasing demands on the part of the users for more robust, powerful and sophisticated machines that can withstand the difficult, and often extreme, work conditions of the industry.
- ▶ Narex's latest cordless tools meet these specifications. In addition to the unique HYBRO pocket-sized hybrid screwdriver, specially developed for the most miniature everyday use, it also offers a wide range of powerful e-POWER commutator and brushless tools from 12 V to 20 V, including the most heavy-duty JUMBO POWER 60 V BRUSHLESS drills and wrenches with world performance para-meters.
- ▶ Angle grinders BRUSHLESS with disc diameters of 125 mm, 150 mm and 230 mm form an integral part of any comprehensive cordless power tool portfolio.

60 V / THE MOST POWERFUL 



20 V / THE MOST COMPACT 



3.6 V / ALWAYS AT HAND 







60V tools power

New innovative line of **NAREX 60 V POWER** cordless power tools with the most powerful **ALL-IN-ONE BRUSHLESS** motors and longest lasting accumulators on the market. Intended for industrial use.



The new **NAREX 60 V JUMBO POWER** accumulators push the limits of power and endurance of cordless tools to a whole new dimension. The technology of series connected **NAREX Li-Ion 4V** cells reduce power consumption by up to a factor of three and reduce losses caused by overheating, thus bringing increased efficiency and a longer service life. Compared to standard 18 V / 5.0 Ah parallel connected high-capacity accumulators, the **runtime** of the NAREX 60 V accumulator is **more than double!**



Hi-tech combination of **BRUSHLESS** technology and modern electronic elements for optimised and steady performance, high precision, efficiency and longer service life.



Advanced digital communication allows precise power regulation and setting of optimal performance parameters. **Advanced multi-speed specials** find a much wider application in their dedicated areas of use.

BASICBOX

The core element of the 60 V product portfolio consists of **BASICBOX economy packs**, which allow you to store basic components in a cardboard box.



Option to acquire a **3-year warranty**, including warranty on accumulators, by registering via an **online** form at www.narex.cz. Applies to the entire NAREX accumulator/cordless portfolio. Requires registration within 30 days of buying a power tool.

BRUSHLESS 60 V / CORDLESS ANGLE GRINDER WITH 1 000 W OF POWER



BL
MOTOR
brushless

STOP
rundown brake

CORDLESS ANGLE GRINDER

ABU 125-600 B

Voltage	60 V
Power	1 000 W
Spindle thread	M 14
Disc diameter	125 mm
No-load speed	9 000 rpm
Overload/overheat protection	✓
Disc brake time (125/6 mm disc)	2.60 s
Weight without accumulator	2.0 kg
Weight incl. 3.0 Ah accumulator	2.90 kg
Charge time	80 min
Accumulator capacity	3.0 Ah

Order number: 65 405 678

DELIVERY INCLUDES

ABU 125-600 B basic machine (65 405 677), AH-AV M10 vibration-absorbing handle (65 405 738), AD-ABU M10/M8 handle adapter (65 405 739), KF-ABU FF nut wrench (65 405 740), KF-AD ABU adapter wrench (65 405 741), BF-ABU flange (65 405 742), Fast Fix quick-release nut (66 614 201), GC ABU 125 grinding guard (65 405 743)

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS



Protective Filter

- Removable anti-dust mesh prevents dirt from entering the motor compartment



Guard

- Quick adjustment of the guard without the need for tools


Quick-Release Nut

- For tool-free disc change



Brushless 1 000 W Motor

- Brushless encased EC motor with optimal anti-dust protection

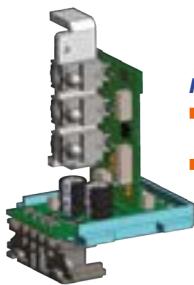


Multi-Functional Digital Electronics

- Overload / overheating / low voltage protection
- Protect the tool and the accumulator

Autonomous LED touch indicator

- Provides immediate information about the state of the battery and the remaining operating capacity



Vibration-Absorbing Handle




- Vibration-absorbing side handle for reduced vibrations with an M10/M8 adapter for optimal grip on the machine

Performance indicators of ABU 125-600 B when used with a 3.0 Ah Li-Ion accumulator

Structural profiled steel

Concrete H15 kerbing

Cold rolled steel sheet, 5 mm thick

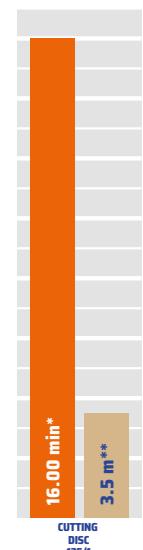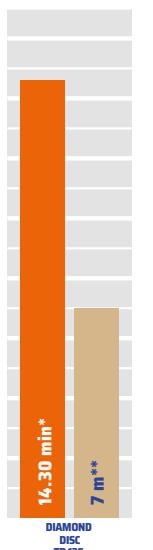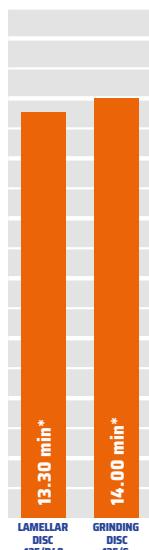

* Total continuous runtime on one Li-Ion 3.0 Ah accumulator

** Total length of cut on one Li-Ion 3.0 Ah accumulator

BRUSHLESS 60 V / A CORDLESS ANGLE GRINDER WITH THREE OPERATING MODE SETTINGS



CORDLESS ANGLE GRINDER

ABU 150-600 3B

Voltage	60 V
Power	1500 W
Spindle thread	M 14
Disc diameter	150 mm
No-load speed	4 000 - 6 000 - 9 000 rpm
Overload/overheat protection	✓
Disc brake time (125/6 mm disc)	1.90 - 2.30 - 2.60 s
Weight without accumulator	2.80 kg
Weight incl. 3.0 Ah accumulator	3.70 kg
Charge time	80 min
Accumulator capacity	3.0 Ah

Order number: 65 405 684

DELIVERY INCLUDES

ABU 150-600 3B basic machine (65 405 683), AH-AV M10 vibration-absorbing handle (65 405 738), AD-ABU M10/M8 handle adapter (65 405 739), KF-ABU FF nut wrench (65 405 740), KF-AD ABU adapter wrench (65 405 741), BF-ABU flange (65 405 742), Fast Fix quick-release nut (66 614 201), GC ABU 150 grinding guard (65 405 745)

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS



Protective Filter

- Durable protective mesh in the air intake holes reduces the risk of dust and dirt entering the motor compartment



Guard

- Quick adjustment of the guard without the need for tools




Brushless motor 1500 W

- Brushless encased EC motor with optimal anti-dust protection



Quick-Release Nut

- For tool-free disc change

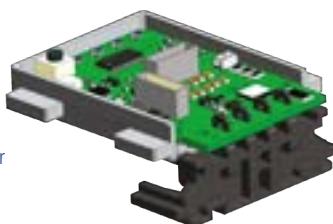

Multi-Functional Digital Electronics with 3 Operating Mode Settings

- Overload / overheat / low voltage protection
- Protect the tool and the accumulator
- Ability to preset operating speed 9 000 - 6 000 - 4 000 rpm



Autonomous LED touch

- Indicator provides immediate information about the state of the battery and the remaining operating capacity



LED indicator with touch panel


- Allows you to select the optimal operating mode 9 000 - 6 000 - 4 000 rpm



Vibration-Absorbing Handle

- Vibration-absorbing side handle for reduced vibrations with an M10/M8 adapter for optimal grip on the machine

Performance indicators of ABU 150-600 3B when used with a 3.0 Ah Li-Ion accumulator

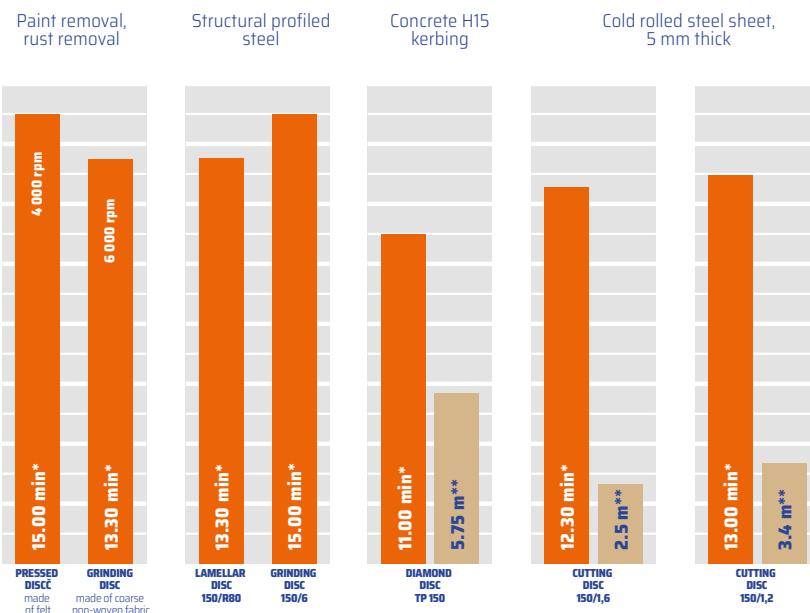

* Total continuous runtime on one Li-Ion 3.0 Ah accumulator

** Total length of cut on one Li-Ion 3.0 Ah accumulator

BRUSHLESS 60 V / CORDLESS ANGLE GRINDER WITH HIGH CUTTING DEPTH



CORDLESS ANGLE GRINDER

ABU 230-600 B

Voltage	60 V
Power	1900 W
Spindle thread	M 14
Disc diameter	230 mm
No-load speed	6 500 rpm
Overload/overheat protection	✓
Disc brake time (125/6 mm disc)	8.40 s
Weight without accumulator	3.30 kg
Weight incl. 3.0 Ah accumulator	4.20 kg
Charge time	80 min
Accumulator capacity	3.0 Ah

Order number: **65 405 690**

DELIVERY INCLUDES

ABU 230-600 B basic machine (65 405 689), AH-AV M10 vibration-absorbing handle (65 405 738), AD-ABU M10/M8 handle adapter (65 405 739), KF-ABU FF nut wrench (65 405 740), KF-AD ABU adapter wrench (65 405 741), BF-ABU flange (65 405 742), Fast Fix quick-release nut (66 614 201), GC ABU 230 grinding guard (65 405 747)

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS




Protective Filter

- Durable protective mesh in the air intake holes reduces the risk of dust and dirt entering the motor compartment



Guard

- Quick adjustment of the guard without the need for tools

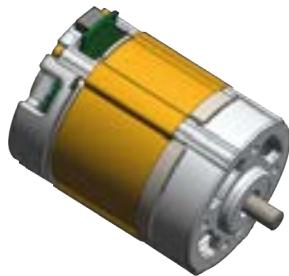

Brushless motor 1900 W

- Brushless encased EC motor with optimal anti-dust protection





Quick-Release Nut

- For tool-free disc change


Autonomous LED touch

- Indicator provides immediate information about the state of the battery and the remaining operating capacity

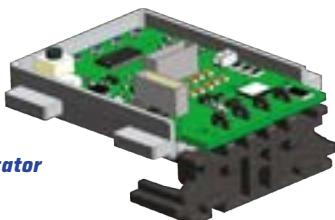

Multi-Functional Digital Electronics with LED Indicator

- Overload / overheating / low voltage protection
- Protect the tool and the accumulator

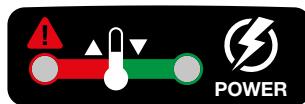

LED Indicator

- Warning and operating signalisation



Vibration-Absorbing Handle




- Vibration-absorbing side handle for reduced vibrations with an M10/M8 adapter for optimal grip on the machine

Performance indicators of ABU 230-600 B when used with a 3.0 Ah Li-Ion accumulator

Structural profiled steel

Concrete H15 kerbing

Cold rolled steel sheet,
5 mm thick

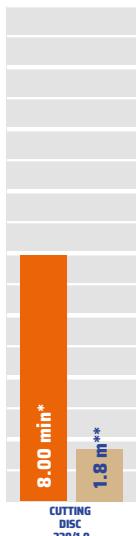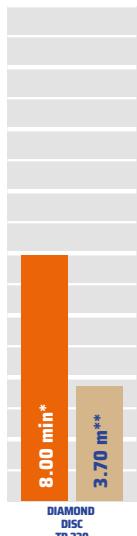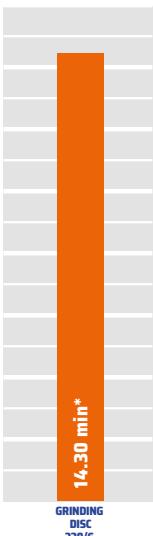

* Total continuous runtime on one Li-Ion 3.0 Ah accumulator

** Total length of cut on one Li-Ion 3.0 Ah accumulator

BRUSHLESS DRIVERS / WRENCHES  60V





jumbo.tools size

Innovative line of **60V** cordless power tools **NAREX JUMBO POWER** with the most powerful **ALL-IN-ONE BRUSHLESS** motors and a with the longest life accumulators on the market. Intended for industrial use.



Hi-Tech system for connecting BRUSHLESS technology with modern electronic components to provide optimisation and output balance, high accuracy, effectiveness, and longer life.



60V NAREX JUMBO POWER accumulators push the limits of cordless tool performance and accumulator service life to new dimensions. Technology of **NAREX Li-ion 4V** cells in series increases efficiency and reduces power consumption and overheating losses. Compared to commonly available 18 V/5.0 Ah high-capacity accumulators, the **operating time** of 60V NAREX accumulator is **more than double!**

BASICBOX

The core element of the 60 V product portfolio consists of **BASICBOX economy packs**, which allow you to store basic components in a cardboard box.



Option to acquire a **3-year warranty**, including warranty on accumulators. by registering via an **online** form at www.narex.cz. Applies to the entire NAREX accumulator/cordless portfolio. Requires registration within 30 days of buying a power tool.

BRUSHLESS 60 V / BRUSHLESS IMPACT DRILL



IMPACT DRILL

ASP 600-2B

Accumulator voltage/capacity	60 V/1x 3.0 Ah
Charge time	80 min
Max. tightening torque	130 Nm
RPM – 1 st gear	0-550 /min
RPM – 2 nd gear	0-2 000 /min
No. of impacts – 1 st gear	0-8 250 ipm
No. of impacts – 2 nd gear	0-30 000 ipm
Chuck range	1.5-13 mm
Spindle thread	1/2"-20 UNF
Weight incl. accumulator	2.6 kg

Order number: **65 405 314**

DELIVERY INCLUDES

ASP 600-2B basic machine (65 405 313), detachable grip with a depth stop (65 405 343), belt clip (65 405 342), cardboard box

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS




Multifunctional transmission provides 3 work modes (including impact drilling) and 2 gears.

- All-metal construction can withstand even the most extreme loads
- Aluminium gearbox casing and multiple spindle seatings increase stability and rigidity
- Automatic spindle lock simplifies the handling of bits
- High-quality, quick-release chuck, with jaws fitted with tungsten carbide, provides the necessary range



Autonomous LED touch

- Indicator provides immediate information about the state of the battery and the remaining operating capacity

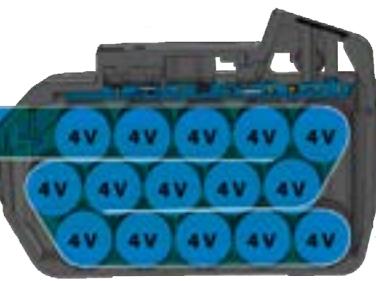

60V accumulators are the ideal solution for HEAVY DUTY power tools with high load requirements. Cordless core of the series-connected **NAREX Li-Ion 4V** cells has a huge portion of energy that lasts **for one or more working shifts**.

1000W BRUSHLESS motor

- Is a true workhorse and can always cope where 18V equipment starts running out of breath
- The combined ALL-IN-ONE concept of the motor with integrated control unit monitors operating data more effectively
- The transition from conventional carbon brushes to a permanent magnet significantly extends motor life - no problems with commutator wear, sparking and overheating




Comfortable, detachable grip with a depth stop for precise work and better control.



Automatic LED light

- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights

Performance indicators ASP 600-2B

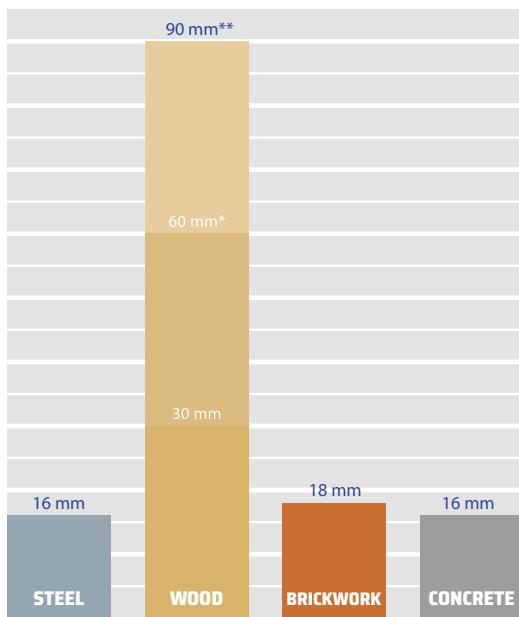

* Forstner drill bit ** Hole saw

Drilling - max. Ø mm



Screw driving - max. Ø mm



BRUSHLESS 60 V / IMPACT WRENCH WITH OUTPUT CONTROL FOR AUTOMOTIVE



BL
MOTOR
brushless / 3 power modes

IMPACT WRENCH

ASR 600-3SB

Accumulator voltage/capacity	60 V/1x 3.0 Ah
Charge time	80 min
Max. tightening torque – 1 st /2 nd /3 rd mode	150/250/540 Nm
Max. loosening torque	750 Nm
RPM – 1 st mode AM	0-1 500 /min
RPM – 2 nd mode AM	0-2 000 /min
RPM – 3 rd mode	0-2 500 /min
No. of strokes	0-3 000 spm
Fastening on the spindle	1/2" square, pin
Weight incl. accumulator	2.15 kg

Order number: **65 405 320**

DELIVERY INCLUDES

ASR 600-3SB basic machine (65 405 318), AD S12/HEX adapter (00 633 760), belt clip (65 405 342), cardboard box

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS



Electronic tightening torque control

offers more possibilities of efficient use, extends accumulator life and saves the motor.

LED indicator with touch panel allows

you to select from 3 preset output modes, which makes the ASR 600-3SB **a specialist for exchanging wheels** of cars and utility vehicles:


- Slow - 1st mode with automatic disconnection and average maximum output up to 150 Nm (suitable for car wheels)
- Medium speed - 2nd mode with automatic disconnection and average maximum output up to 250 Nm (suitable for car wheels and utility vehicle wheels)
- Fast - 3rd mode with maximum output up to 570 Nm for maximum performance



High-quality, forged spindle

made of heat-treated steel is extremely durable, ensures excellent force transmission and boasts minimal wear.

Delivery includes a compact **AD S12/HEX conversion adapter** with HEX fastening for drilling and screw driving.

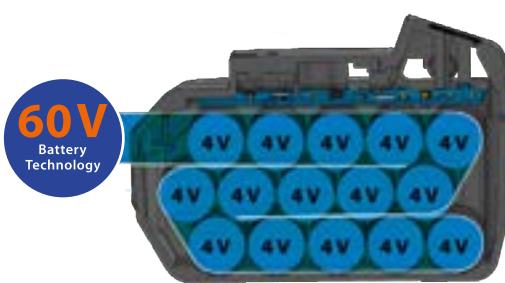

60V accumulators are the ideal solution for HEAVY DUTY power tools with high load requirements. Cordless core of the series-connected **NAREX Li-Ion 4V** cells has a huge portion of energy that lasts **for one or more working shifts**.

Overview of indication and output parameters

Mode	LED indication	Max. output	Recommendation
AM 1		150 Nm	M8-M12
AM 2		250 Nm	M10-M16
3 (MAX)		540 Nm	M12-M24
		Warning indication for low voltage, overload, overheating and defect	



650W BRUSHLESS motor

- Is a true workhorse and can always cope where 18V equipment starts running out of breath
- The combined ALL-IN-ONE concept of the motor with integrated control unit monitors operating data more effectively
- The transition from conventional carbon brushes to a permanent magnet significantly extends motor life - no problems with commutator wear, sparking and overheating



Autonomous LED touch indicator

- Gives immediate information about the state of the battery and the remaining operating capacity



Automatic LED light


- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights



Performance indicators ASR 600-3SB



Drilling - max. Ø mm

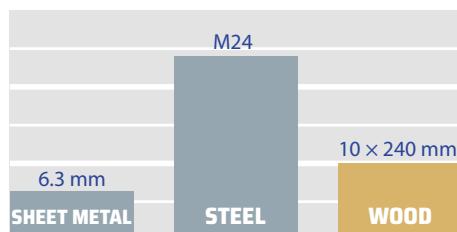

Screw driving - max. Ø mm

BRUSHLESS 60 V / IMPACT WRENCH WITH OUTPUT CONTROL FOR HEAVY-DUTY APPLICATIONS



BL
MOTOR
brushless / 3 power modes

IMPACT WRENCH

ASR 600-3MTB

Accumulator voltage/capacity	60 V/1x 3.0 Ah
Charge time	80 min
Max. tightening torque – 1 st /2 nd /3 rd mode	250/500/1 000 Nm
Max. loosening torque	1 500 Nm
RPM – 1 st mode AM	0-1 100 /min
RPM – 2 nd mode AM	0-1 500 /min
RPM – 3 rd mode	0-1 600 /min
No. of strokes	0-2 400 spm
Fastening on the spindle	1/2" square, ring
Weight incl. accumulator	3.5 kg

Order number: **65 405 696**

DELIVERY INCLUDES

ASR 600-3MTB basic machine (65 405 697), AD S12/S34 conversion adapter (65 404 555), belt clip (65 405 342), cardboard box

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS



Electronic tightening torque control

expands the options of effective use while also increasing accumulator life and reducing the wear on the impact mechanism.

LED indicator with touch panel allows you to select from 3 preset output modes:

- slow 1st mode with average maximum output of up to 250 Nm
- medium 2nd mode with average maximum output of up to 500 Nm
- fast 3rd mode with maximum output of up to 1 000 Nm for heavy-duty applications

Overview of indication and output parameters

Mode	LED indication	Max. output	Recommendation	
AM 1		250 Nm	M12-M16	
AM 2		500 Nm	M12-M24	
3 (MAX)		1 000 Nm	M12-M30	
		Warning indication for low voltage, overload, overheating and damage		



Autonomous LED touch indicator

- Gives immediate information about the state of the battery and the remaining operating capacity

Automatic LED light

- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights

Performance indicators ASR 600-3MTB




Screw driving – max. Ø mm



The tool's robust 1/2" forged spindle

made of heat-treated steel is highly durable, boasting low wear and excellent force transmission.

Each tool also comes with a high-quality forged **AD S12/S34 adapter** for three-quarter heads and other attachments.

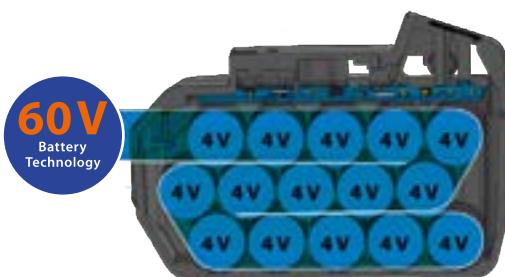

60V accumulators are the ideal solution for HEAVY DUTY power tools with high load requirements. The accumulator core, consisting of series connected **NAREX Li-Ion 4V** cells, hold a tremendous amount of energy that can last **for one or even multiple work shifts**.



The 720 W BRUSHLESS motor

- Is a true workhorse that stands strong where 18 V equipment starts running out of breath
- The combined ALL-IN-ONE concept of the motor with an integrated control unit efficiently monitors operating parameters
- Transition from conventional carbon brushes to a permanent magnet significantly extends the service life of the motor, eliminating issues with commutator wear, sparking and overheating



BRUSHLESS 60 V / IMPACT WRENCH WITH OUTPUT CONTROL FOR HEAVY-DUTY APPLICATIONS



BL
MOTOR
brushless / 3 power modes

IMPACT WRENCH

ASR 600-3HTB

Accumulator voltage/capacity	60 V/1x 3,0 Ah
Charge time	80 min
Max. tightening torque – 1 st /2 nd /3 rd mode	600/1 000/1 690 Nm
Max. loosening torque	2 050 Nm
RPM – 1 st mode	0-900 /min
RPM – 2 nd mode	0-1 200 /min
RPM – 3 rd mode	0-1 600 /min
No. of strokes	0-2 400 spm
Fastening on the spindle	3/4" square, ring
Weight incl. accumulator	3,85 kg

Order number: **65 405 328**

DELIVERY INCLUDES

ASR 600-3HTB basic machine (65 405 325), AD S34/S12 conversion adapter (65 405 340), belt clip (65 405 342), cardboard box

Cardboard **BASIC BOX**



Accumulators and charger not included in the basic pack!

3.0 Ah 60 V Li-Ion accumulator AP 610 (65 405 336),
60 V charger AN 600 (65 405 338)

PARAMETERS



Electronic tightening torque control

offers more possibilities of efficient use, extends accumulator life and saves the motor.

LED indicator with touch panel allows

selection from 3 power modes, making the ASR 600-3HTB one of the most powerful one-handed impact wrenches on the market:


- slow - 1st mode with average maximum output up to 600 Nm
- medium - 2nd mode with average maximum output up to 1 000 Nm
- fast - 3rd mode with maximum output up to 1 690 Nm for maximum performance



Robust 3/8" forged spindle

made of heat-treated steel is very durable, featuring low wear and excellent force transmission.

Delivery includes high-quality, forged **AD S34/S12 conversion adapter** half-inch socket heads and other attachments.

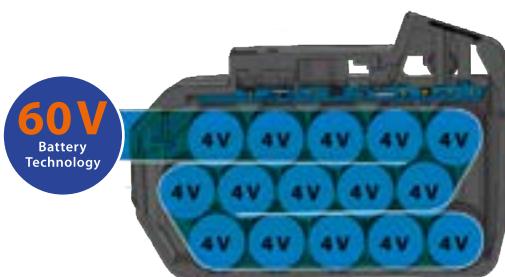

60V accumulators are the ideal solution for HEAVY DUTY power tools with high load requirements. Cordless core of the series-connected **NAREX Li-Ion 4V** cells has a huge portion of energy that lasts **for one or more working shifts**.

Overview of indication and output parameters

Mode	LED indication	Max. output	Recommendation	
1		600 Nm	M12-M30	
2		1 000 Nm		
3 (MAX)		1 690 Nm		
		Warning indication for low voltage, overload, overheating and defect		



The 760 W BRUSHLESS motor

- Is a true workhorse that stands strong where 18 V equipment starts running out of breath
- The combined ALL-IN-ONE concept of the motor with integrated control unit monitors operating data more effectively
- The transition from conventional carbon brushes to a permanent magnet significantly extends motor life - no problems with commutator wear, sparking and overheating



Autonomous LED touch indicator

- Gives immediate information about the state of the battery and the remaining operating capacity



Automatic LED light

- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights



Performance indicators ASR 600-3HTB







compact.tools
size

Innovative line of **20 V NAREX e-POWER** cordless tools with **ALL-IN-ONE BRUSHLESS** motors and the most compact design in its class on the market. Intended for professional use.



Hi-Tech system for connecting BRUSHLESS technology with modern electronic components to provide optimisation and output balance, high accuracy, effectiveness, and longer life.



There has never been so much power in such a compact accumulator! **NAREX AP 203** brings **up to 30 % more power** and takes up **50 % less space**.

BASIC BOX

Economical BASIC BOX packaging (i.e. basic machine without batteries and charger) saves costs and space. The delivery includes an impact-resistant insert.



Option to acquire a **3-year warranty**, including warranty on accumulators, by registering via an **online** form at www.narex.cz. Applies to the entire NAREX accumulator/cordless portfolio. Requires registration within 30 days of buying a power tool.

BRUSHLESS 20 V / COMPACT DRILL DRIVER / COMPACT IMPACT DRIVER



2 speeds
 BL MOTOR
 rundown brake
 el. speed regulation

2 speeds
 BL MOTOR
 rundown brake
 el. speed regulation

DRILL DRIVER

ASV 202-2B | ASV 203-2B

	ASV 202-2B	ASV 203-2B
Accumulator voltage/ capacity	20 V/ 2.0 Ah	20 V/ 3.0 Ah
Charge time	35 min	45 min
Max. tightening torque	67 Nm	
RPM - 1 st gear	0-500 /min	
RPM - 2 nd gear	0-1 800 /min	
Chuck range	1,5-13 mm	
Spindle thread	1/2"-20 UNF	
Weight incl. accumulator	1.4 kg	

DELIVERY INCLUDES

ASV 202-2B - ASV 200-2B basic machine (65 405 297), quick-release chuck (65 404 850), belt clip (65 405 341), 2x AP 202 accumulator (65 405 333), ANU 1220 charger (65 405 337), transport case with insert (65 405 344)

ASV 203-2B - ASV 200-2B basic machine (65 405 297), quick-release chuck (65 404 850), belt clip (65 405 341), 2x AP 203 accumulator (65 405 334), ANU 1220 charger (65 405 337), transport case with insert (65 405 344)

Order number: 65 405 299 (ASV 202-2B)
65 405 301 (ASV 203-2B)

IMPACT DRIVER

ASP 202-2B | ASP 203-2B

	ASP 202-2B	ASP 203-2B
Accumulator voltage / capacity	20 V/ 2.0 Ah	20 V/ 3.0 Ah
Charge time	35 min	45 min
Max. tightening torque	67 Nm	
RPM - 1 st gear	0-500 /min	
RPM - 2 nd gear	0-1 800 /min	
No. of impacts - 1 st gear	0-7 500 /min	
No. of impacts - 2 nd gear	0-27 000 /min	
Chuck range	1,5-13 mm	
Spindle thread	1/2"-20 UNF	
Weight incl. accumulator	1.45 kg	

DELIVERY INCLUDES

ASP 202-2B - ASP 200-2B basic machine (65 405 302), quick-release chuck (65 404 850), belt clip (65 405 341), 2x AP 202 accumulator (65 405 333), ANU 1220 charger (65 405 337), transport case with insert (65 405 344)

ASP 203-2B - ASP 200-2B basic machine (65 405 302), quick-release chuck (65 404 850), belt clip (65 405 341), 2x AP 203 accumulator (65 405 334), ANU 1220 charger (65 405 337), transport case with insert (65 405 344)

Order number: 65 405 304 (ASP 202-2B)
65 405 305 (ASP 203-2B)

PARAMETERS



Removable belt clip
(Delivery includes)
► For free hands and improved work safety



The 360W BRUSHLESS motor is more powerful, efficient, and economical.

- The combined **ALL-IN-ONE** concept of the motor with integrated control unit monitors operating data more effectively
- The transition from conventional carbon brushes to a permanent magnet significantly extends motor life – no problems with commutator wear, sparking and overheating

"RED DOTS" LED indicator

automatically indicates the following states:

- current accumulator capacity
- voltage too low
- overload
- overheating
- defect



PLUG-IN design (with battery in the handle) means 20V NAREX screwdrivers belong to the most compact power tools with the highest working range in their performance group.

- The battery incl. the foot of the grip takes up 50% less space than a comparable accumulator with slide-in design
- Excellent look of the tool is emphasised by the softgrip

Multifunctional transmission provides up to 3 work modes including impact drilling (ASP 200-2B) and 2 gears.


- All-metal construction can withstand even the most extreme loads
- Multiple-spindle seating increases overall stability and rigidity
- Automatic spindle lock simplifies the handling of bits
- High-quality, quick-release chuck provides the necessary working range



Automatic LED light

- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights

Performance indicators ASV 200-2B / ASP 200-2B

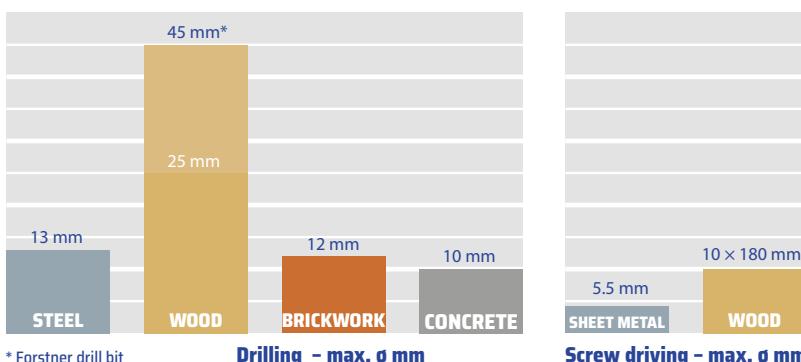

Cardboard **BASIC BOX** version of ASV 200-2B (65 405 298) without paccumulator and charger.

DELIVERY INCLUDES

ASV 200-2B basic machine (65 405 297), belt clip, Puzzle-B insert (65 405 347), cardboard box

Cardboard **BASIC BOX** version of ASV 200-2 (65 405 290) without paccumulator and charger.

DELIVERY INCLUDES

ASV 200-2 basic machine (65 405 289), belt clip, Puzzle-B insert (65 405 347), cardboard box

Cardboard **BASIC BOX** version of ASP 200-2 (65 405 294) without paccumulator and charger.

DELIVERY INCLUDES

ASP 200-2 basic machine (65 405 293), belt clip, Puzzle-B insert (65 405 347), cardboard box

BRUSHLESS 20 V / IMPACT WRENCH / IMPACT WRENCH WITH OUTPUT CONTROL



BL
MOTOR
brushless

el. speed regulation

BL
MOTOR
brushless

3 power modes

el. speed regulation

IMPACT WRENCH

ASR 203-SB

Accumulator voltage/capacity	20 V/3.0 Ah
Charge time	45 min
Max. tightening torque	300 Nm
Max. loosening torque	430 Nm
RPM	0-2 800 /min
No. of strokes	0-3 000 spm
Fastening on the spindle	1/2" square, pin
Weight incl. accumulator	1.4 kg

DELIVERY INCLUDES

ASR 200-SB basic machine (65 405 306), AD S12/HEX conversion adapter (00 633 760), belt clip (65 405 341), 2x AP 203 accumulator (65 405 334), ANU 1220 charger (65 405 337), transport case with insert (65 405 344)

Order number: **65 405 309**

IMPACT WRENCH

ASR 203-3SB

Accumulator voltage/capacity	20 V/3.0 Ah
Charge time	45 min
Max. tightening torque - 1 st /2 nd /3 rd mode	120/260/260 Nm
Max. loosening torque	350 Nm
RPM - 1 st mode	0-1 300 /min
RPM - 2 nd mode/3 rd mode	0-2 800 /min
No. of strokes	0-3 000 spm
Fastening on the spindle	1/2" square, pin
Weight incl. accumulator	1.35 kg

DELIVERY INCLUDES

ASR 200-3SB basic machine (65 405 310), conversion adapter AD S12/HEX (00 633 760), belt clip (65 405 341), 2x AP 203 accumulator (65 405 334), ANU 1220 charger (65 405 337), transport case with insert (65 405 344)

Order number: **65 405 312**

PARAMETERS

High-quality forged spindle made of heat-treated steel is very durable. Featuring low level of wear and excellent force transmission. Delivery includes a compact AD S12/HEX conversion adapter with HEX fastening for drilling and screw driving.



320W BRUSHLESS motor

is more powerful, efficient and economical.

- The combined ALL-IN-ONE concept of the motor with integrated control unit monitors operating data more effectively
- The transition from conventional carbon brushes to a permanent magnet significantly extends motor life - no problems with commutator wear, sparking and overheating



"RED DOTS" LED indicator

automatically indicates the following states:

- current accumulator capacity
- voltage too low
- overload
- overheating
- defect



PLUG-IN design (with battery in the handle) means 20V NAREX wrenches belong to the most compact power tools with the highest working range in their performance group.

- The battery incl. the foot of the grip takes up 50% less space than a comparable accumulator with slide-in design
- Excellent look of the tool is emphasised by the softgrip



(applies only to ASR 200-3SB)

Electronic tightening torque control offers more possibilities of efficient use, extends accumulator life and saves the motor. LED indicator with touch panel allows you to select from 3 output modes:

- slow - 1st mode with half output for smaller screw connections
- fast - 2nd mode with maximum output for maximum performance
- automatic - 3rd mode with a smooth transition from slow RPM to maximum speed for gentle guiding of the bolt/screw/ self-tapping screw into the material and its subsequent fast tightening

Overview of indication and output parameters

Mode	LED indication	Max. output	Recommendation
1	● ●	120 Nm	M4-M10
2	● ●	260 Nm	M10-M20
AM	● ● / ● ●	260 Nm	Screws/bolts



Removable belt clip

(Delivery includes)

- For free hands and improved work safety




Automatic LED light

- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights

Performance indicators ASR 200-SB / ASR 200-3SB



Drilling - max. ø mm

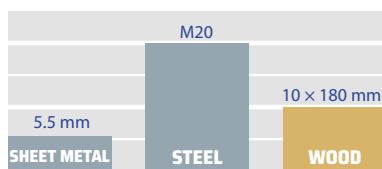

Screw driving - max. ø mm

Cardboard **BASIC BOX** version of ASR 200-SB (65 405 308) without paccumulator and charger.

DELIVERY INCLUDES

ASR 200-SB basic machine (65 405 306), belt clip, AD S12/HEX adapter (00 633 760), Puzzle-B insert (65 405 347), cardboard box

Cardboard **BASIC BOX** version of ASR 200-3SB (65 405 311) without paccumulator and charger.

DELIVERY INCLUDES

ASR 200-3SB basic machine (65 405 310), belt clip, AD S12/HEX adapter (00 633 760), Puzzle-B insert (65 405 347), cardboard box



12 V / COMPACT DRILL DRIVER AND TORCH / COMPACT IMPACT WRENCH



3
years warranty

2 speeds

spindle arrest



DRILL DRIVER AND TORCH

ASV 122-SET

Accumulator voltage/capacity	12 V/2.0 Ah
Charge time	-25 min
Max. tightening torque	35 Nm
RPM - 1st gear	0-350 /min
RPM - 2nd gear	0-1 350 /min
Chuck range	0.8-10 mm
Spindle thread	3/8"-24 UNF
Weight incl. accumulator	1.1 kg

DELIVERY INCLUDES

ASV 120-2 basic machine (65 405 517), quick-release chuck (65 404 351), 2x AP 122 accumulator (65 405 476), ANU 1220 charger (65 405 337), AS 120 torch (65 405 521), transport case

Order number: **65 405 519**

IMPACT WRENCH

ASR 122-S

Accumulator voltage / capacity	12 V/2.0 Ah
Charge time	-25 min
Max. tightening torque	139 Nm
RPM	0-2 400 /min
No. of strokes	0-3 100 /min
Fastening on the spindle	3/8" square
Weight incl. accumulator	0.95 kg

DELIVERY INCLUDES

ASR 120-S basic machine (65 405 472), AD 538/HEX conversion adapter (65 405 475), 2x AP 122 accumulator (65 405 476), ANU 1220 charger (65 405 337), transport case (65 404 342)

Order number: **65 405 474**

PARAMETERS



"RED DOTS" LED indicator

automatically indicates the following states:

- current accumulator capacity
- voltage too low
- overload
- overheating
- defect



ELECTRONIC CONTROL & PROTECTION

Hi-tech system for combining **BRUSHLESS** technology with modern electronic elements, tracks and evaluates the following states:

- voltage too low
- overload
- overheating
- malfunction

Perfect synergy of accumulator output with ANU 1220 quick charger creates effective, economical and environmentally friendly solution for recharging working energy.

New compact accumulator cells provide 30% more energy and longer life. The individual battery components meet the most demanding environmental criteria and parameters.

Ergonomic rubberised handle

is designed to be a perfect fit for any hand.

- Each control of the tool is within easy reach and user-friendly



Automatic LED light

- Lighting the workspace
- High-working comfort provided by a couple of powerful LED lights

Cardboard **BASIC BOX** version of ASV 120-2 (65 405 518) without paccumulator and charger.

DELIVERY INCLUDES

ASV 120-2 basic machine (65 405 517), Puzzle-B insert (65 405 347), cardboard box



illustrative photo

Cardboard **BASIC BOX** version of ASR 120-S (65 405 473) without paccumulator and charger.



DELIVERY INCLUDES

ASR 120-S basic machine (65 405 472), AD S38/HEX adapter (65 405 475), Puzzle-B insert (65 405 347), cardboard box



illustrative photo

Performance indicators ASV 120-2

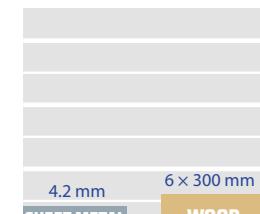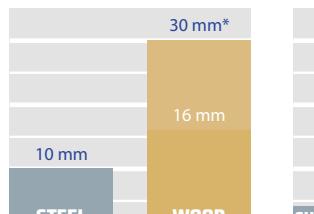

Performance indicators ASR 120-2



HYBRID SCREWDRIVERS 3,6V





3 years warranty | 3.6 V POCKET TOOL | - | Micro USB | max. 10 Nm aut. spindle lock

CORDLESS HYBRID DRIVER

AS 37 HYBRO LADY

Voltage	3.6 V
Accumulator capacity	Li-Ion 850 mAh
Accumulator charge time	ca 45 min
Charging connector	5-pin micro USB
Max. torque (electric)	3 Nm
Max. torque (manual)	10 Nm
Speed	280 rpm
Max. screw ø without pre-drilling	
- manual drive	4.5 mm
- electric drive	2.5 mm
Max. screw size	M8
Bit holder on the spindle	6.35 mm hex with magnet
Weight	140 g

DELIVERY INCLUDES

Basic AS 37 HYBRO LADY machine (65 406 027), 5-pin micro USB power cable (65 404 439), 8-piece set of 25 mm C6.3 bits: PH1, PH2, PH3, F3, F4, H3, H4, H5, 75 mm extended E6.3/PH1 bit, 75 mm E6.3/C6.3 bit holder, blister pack

Order number: 65 406 028

- Accumulator-powered pocket driver in a trendy colour scheme
- Unique marriage of the principles of electrical and manual use
- All-metal gearbox and automatic spindle lock for manual screw-driving to up to 10 Nm
- Stable Li-Ion accumulator cell to ensure the tool is always ready on stand-by
- Electronically controlled quick-charger with coloured indicator
- Micro USB charging port for charging from standard mobile devices
- Magnetic head for quick swapping of driver bits
- Automatic LED work light for working in dark corners
- Option to get a 3-year warranty through online registration

3.6 V / CORDLESS HYBRID DRIVER WITH ELECTRONIC POWER REGULATION



3 years warranty | 3.6 V POCKET TOOL | USB-C | max. 15 Nm aut. spindle lock

CORDLESS HYBRID DRIVER AS 37-2 HYBRO EVO

Voltage	3.6 V
Accumulator capacity	Li-Ion 1,000 mAh
Accumulator charge time	ca 60 min
Charging connector	USB-C
Max. torque (electric)	
- 1st setting	1 Nm
- 2nd setting	5 Nm
Max. torque (manual)	15 Nm
Speed	250 rpm
Max. screw Ø without pre-drilling	
- manual drive	5 mm
- electric drive	3 mm
Max. screw size	M8
Bit holder on the spindle	6.35 mm hex
Weight	180 g

DELIVERY INCLUDES

Basic AS 37-2 HYBRO EVO machine (65 405 671), USB-C power cable (65 405 753), 14-piece set of 25 mm C6.3 bits: PH1, PH2, PH3, F4, F5, H3, H4, H5, H6, T5, T10, T15, T20, T25; 25 mm C6.3/S14 adapter, 75 mm extended E6.3/PH1 bit, 75 mm double-sided PH2/F5.5 bit, 68 mm HYBRO/C6.3 bit holder (65 405 754), 58 mm HYBRO/C4 bit holder (65 405 755), snap hook with a rubber spring, case

Order number: 65 405 672

- Extra light and slim for delicate work, brimming with power for demanding projects
- Battery-powered pocket driver for everyday professional work
- Popular axial design for easy handling and maximum reach
- Unique marriage of the principles of electrical and manual use
- Two-step electronic regulation of tightening torque with LED setting indicator:
 - max. 1 Nm, low load for micro interfaces (C4 bits)
 - max. 5 Nm, higher load (C6.3 bits)
- All-metal gearbox and automatic spindle lock for manual screwdriving up to 15 Nm
- Stable Li-Ion accumulator cell to ensure the tool is always ready on stand-by
- Electronically controlled quick-charger with coloured indicator
- USB-C charging port for charging from standard mobile devices
- Quick-release head for a wide range of consumer accessories
- HYBRO/C4 and HYBRO/C6.3 bit holders with an extended shank for maximum axial play included in the standard pack
- Automatic LED work light with a switch-off delay
- Option to get a 3-year warranty through online registration

3.6 V / CORDLESS HYBRID DRIVER



3 years warranty | 3.6 V POCKET TOOL | USB-C | max. 10 Nm aut. spindle lock

CORDLESS HYBRID DRIVER

AS 37-Li HYBRO

Voltage	3.6 V
Accumulator	Li-Ion 850 mAh
Accumulator charge time	ca 45 min
Charging connector	USB-C
Max. torque (electric)	4 Nm
Max. torque (manual)	10 Nm
Speed	280 rpm
Max. screw ø without pre-drilling	
- manual drive	5 mm
- electric drive	3 mm
Max. screw size	M8
Bit holder on the spindle	6.35 mm hex
Weight	162 g

DELIVERY INCLUDES

Basic AS 37-Li HYBRO machine (65 404 438), USB-C power cable (65 405 753), 75 mm extended E6.3/PH0 bit, 75 mm extended E6.3/PH1 bit, 75 mm extended E6.3/H4 bit, 110 mm double-sided PH2/F5.5 bit, blister pack

Order number: 65 405 670

- Accumulator-powered pocket driver for everyday use
- Popular axial design for easy handling and maximum reach
- Unique marriage of the principles of electrical and manual use
- All-metal gearbox and automatic spindle lock for manual screwdriving to up to 12 Nm
- Stable Li-Ion accumulator cell to ensure the tool is always ready on stand-by
- Electronically controlled quick-charger with coloured indicator
- USB-C charging port for charging from standard mobile devices
- Quick-release head for a wide range of consumer accessories
- Automatic LED work light for working in dark corners
- Option to get a 3-year warranty through online registration


ACCUMULATORS

TYPE	CAPACITY (AH)	CHEMICAL COMPOSITION	COMPATIBILITY		ORD. NUMBER
			BASIC MACHINE	CHARGER	
7,2 V					
 AP 7 LI	2.0	Li-Ion	ASV 7-A, AS 7	AN 7 E	65 404 191
12 V					
 AP 122	2.0	Li-Ion	ASV 108-2, ASV 120-2, ASR 120-S, AS 120	AN 108, ANU 1220	65 405 476
 AP 123	3.0	Li-Ion			65 405 477
14,4 V					
 AP 14 LM-4,0	4.0	Li-Ion	ASV 14 EA, ASV 14 A, ASR 14 E-1/4", ASR 14 E-1/2", ASR 14 ES, AS 14-3	AN-UNI	65 404 353
AP 14 LI	2.0	Li-Ion	ASV 14-2A, ASP 14-2A	AN-UNI C	65 403 934
18 V					
 AP 18 LI	2.0	Li-Ion	ASV 18-2A, ASP 18-2A, ASR 18-S, ASR 18 HT-S	AN-UNI C	65 403 936
AP 18 LU	4.0	Li-Ion			65 403 937
20 V					
 AP 202	2.0	Li-Ion	ASV 200-2, ASP 200-2, ASV 200-2B, ASP 200-2B, ASR 200-SB, ASR 200-3SB	ANU 1220	65 405 333
AP 203	3.0	Li-Ion			65 405 334
60 V					
 AP 610	3.0 = (18 V 10 Ah)	Li-Ion	AP 600-2B, ASR 600-3SB, ASR 600-3HTB, ASR 600-3MTB, ABU 125-600 B, ABU 150-600 3B, ABU 230-600 B	AN 600	65 405 336

ADAPTERS FOR WRENCHES

TYPE	MACHINE SPINDLE	TOOL FASTENING	COMPATIBLE WITH MACHINE	ORD. NUMBER
 AD S38/HEX			ASR 120-S	65 405 475
 AD S12/HEX			ASR 14 E-1/2, ASR 14 ES, ASR 18-S, ASR 200-SB, ASR 200-3SB, ASR 600-3SB, ESR 500	00 633 760
 AD S12/S34			ASR 18 HT-S, ESR 800, ASR 600-3MTB	65 404 555
 AD S34/S12			ASR 600-3HTB	65 405 340

CHARGERS AND QUICK CHARGERS

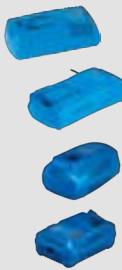

TYPE	FOR VOLTAGE	CHARGE TIME	COMPATIBLE WITH ACCUMULATOR	ORD. NUMBER
AN-UNI	12-14.4 V	25-60 min	AP-ASV 12 E, AP 12 CE, AP 12 MH-1.7, AP-ASV 14 E, AP 14 CE, AP 14 MH-1.7, AP 14 LC, AP 14 LC-2.0, AP 14 LM, AP 14 LM-4.0	00 648 648
AN-UNI C	14.4-18 V	25-60 min	AP 14 LE, AP 14 LI, AP 14 LP, AP 14 LU, AP 18 LE, AP 18 LI, AP 18 LP, AP 18 LU	65 404 849
ANU 1220	12-20 V	25-45 min	AP 108-2.0, AP 122, AP 123, AP 202, AP 203	65 405 337
AN 600	60 V	60-80 min	AP 607, AP 610	65 405 338

QUICK-RELEASE CHUCKS



TYPE	RANGE (MM)	THREAD	I	A	HM	COMPATIBLE WITH MACHINE	ORD. NUMBER
KC-D 6-3/8	0.6-6	3,8"-24 UNF				ASV 7-A	00 765 459
KC-D 10-3/8 A	1-10	3,8"-24 UNF	●			ASV 108-2, ASV 120-2	65 404 351
KC-D 10-1/2 A	1-10	1/2"-20 UNF	●			ASV 12 E, ASV 12 EA, ASV 14 E, ASV 14 EA	00 648 430
KC-D 13-1/2 AI	1.5-13	1/2"-20 UNF	●	●		ASV 14-2A, ASP 14-2A, ASV 18-2A, ASP 18-2A, ASV 200-2, ASP 200-2, ASV 200-2B, ASP 200-2B	65 404 850
KC-D 13-1/2 AIHM	1.5-13	1/2"-20 UNF	●	●	●	ASP 14-2A, ASP 18-2A, ASP 600-2B	65 405 339

Explanatory notes: I - impact, A - Auto-Lock, HM - jaws with tungsten carbide

Fastening system NAREX SUPER LOCK will surprise the handyman, excite the professional and shine in industrial use. The new, innovative and patented solution for the secondary magnetic holder SUPER LOCK brings a revo-

lution in the area of installation and fastening and is irreplaceable anywhere where time and money saved are key and every free hand helps.




EASY RELEASE
Ø 10 ULTRA SLIM

AUTO LOCK
S2 STEEL

Cr PLATING
Nd MAGNETIC

NX DESIGN
HAND FREE SCREWING

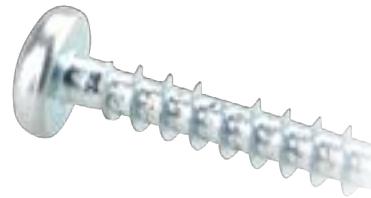

SUPER LOCK BIT SETS	TYPE	SET CONTENTS	HAND FREE SCREWING	AMOUNT IN A PACK	ORD. NUMBER
18-Bit Box SUPER LOCK	HAND FREE SCREWING	18-piece set of SUPER LOCK bits incl. SLIM bit holder and SUPER LOCK magnetic attachments (C6.3/25 mm: PH1, 2x PH2, PH3, PZ1, 2x PZ2, PZ3, F4, F5, F6, H2, H3, H4, H5, H6, T10, T15, T20, T25, T27, T30, T40; 25mm adapter for 1/4" square; SUPER LOCK ORANGE, SUPER LOCK BLUE, SUPER LOCK BLACK)	• • •	18-piece set	65 405 326
35-Bit Box SUPER LOCK	HAND FREE SCREWING	35-piece set of SUPER LOCK bits incl. SLIM-QUICK bit holder and SUPER LOCK magnetic attachments (C6.3/25 mm: PH1, 4x PH2, PH3, PZ1, 2x PZ2, PZ3, F3, F4, F5, F6, H3, H4, H5, H6, T10, T15, T20, T25, T27, T30, T40; 25mm adapter for 1/4" square; SUPER LOCK ORANGE, SUPER LOCK BLUE, SUPER LOCK BLACK)	• • •	35-piece set	65 404 440
52-Bit Box SUPER LOCK	HAND FREE SCREWING	52-piece set of SUPER LOCK bits incl. SLIM-QUICK bit holder and SUPER LOCK magnetic attachments (C6.3/25 mm: 3x PH1, 6x PH2, 3x PH3, 3x PZ1, 6x PZ2, 3x PZ3, F3, F4, F5, F6, H3, H4, H5, H6, 2x T10, 2x T15, 3x T20, 2x T25, T27, 3x T30, 2x T40; SUPER LOCK ORANGE, SUPER LOCK BLUE, SUPER LOCK BLACK)	• • •	52-piece set	65 404 442
65-Bit Box SUPER LOCK	HAND FREE SCREWING	65-piece set of SUPER LOCK bits incl. SLIM, SLIM-QUICK bit holders and SUPER LOCK magnetic attachments (C6.3/25 mm: 2x PH1, 3x PH2, PH3, 2x PZ1, 3x PZ2, PZ3, F4, F6, H2, H2.5, 2x H3, 2x H4, 2x H5, 2x H6, 6x T10, 4x T15, 8x T20, 4x T25, T27, 4x T30, 2x T40, TX10, TX15, TX20, TX25, TX27, TX30, TX40; SUPER LOCK ORANGE, SUPER LOCK BLUE, SUPER LOCK BLACK)	• • •	65-piece set	65 404 444

SUPER LOCK BIT HOLDERS	TYPE	l. mm	Ø 10 ULTRA SLIM	Ø 6.3 E6.3	Ø 6.3 C6.3	AUTO LOCK	EASY RELEASE	Nd MAGNETIC	Ø 11 S SIZE	Ø 13 M SIZE	Ø 15 L SIZE	AMOUNT IN A PACK	ORD. NUMBER
SLIM	SLIM	60	•	•	•			•	•	•	•	10	65 404 491
SLIM-QUICK	SLIM-QUICK	65	•	•	•	•	•	•	•	•	•	5	65 404 489

ACCESSORIES / SUPER LOCK DRIVER SYSTEM



EASY RELEASE internal mechanism quickly reacts to any changes made and makes changing bits even easier and safer. Immediately after unlocking the control ring, an internal magnet pushes out the screwdriver bit to a position where it cannot fall out but can be very easily removed.



AUTO LOCK mechanically locks any bit with C6.3 and E6.3 hexagonal shank, preventing it from coming loose even during the most demanding operations and helps maintain a high work rate.



The bearing portion of the holder is made of high-quality hardened steel. Its ULTRA SLIM body is perfectly balanced and has extreme work range. EASY RELEASE control ring follows up on the slim body, giving the handle a homogeneous appearance and very low runout.



The latest series of universal screwdriver bits NAREX SUPER LOCK is designed for manual and machine operation on all popular conventional interfaces, including connection to the unique SUPER LOCK system, supporting HANDS FREE SCREWING. Each bit is fitted with a recess and a coloured identification strip for fitting the corresponding secondary SUPER LOCK magnetic holder.



Specially tempered surface and core made of S2 high-quality tool steel with a hardness of 58-60 HRC guarantees NAREX SUPER LOCK screwdriver bits have excellent properties such as high resistance to wear and tear, resilience in moments of sudden increase in torque and long service life.



Final CR PLATING of NAREX SUPER LOCK screwdriver bits lends their surface exceptional stability and resistance to corrosion caused, for instance, by direct contact with water, air humidity or human sweat.



Secondary SUPER LOCK magnetic holder ensures a 100 % fit of the screwdriver bit into the grooves of the corresponding fastener, guaranteeing optimal torque transmission, reducing the load on the bit and extending its service life. Thanks to a sophisticated lateral lock with a soft hinge, the SUPER LOCK magnetic holder can always be easily reinstalled. Powerful neodymium industrial magnet ND MAGNETIC can hold a fastener up to 30x heavier than itself.

SUPER LOCK MAGNETIC HOLDERS		TYPE	(NX) DESIGN	Ø 11 S SIZE	Ø 13 M SIZE	Ø 15 L SIZE	Nd MAGNETIC	(HAND FREE) SCREWING	AMOUNT IN A PACK	ORD. NUMBER		
		SUPER LOCK - ORANGE	•	•	•	•	•		10	65 404 483		
		SUPER LOCK - BLUE	•	•	•	•	•		10	65 404 485		
		SUPER LOCK - BLACK	•	•	•	•	•		10	65 404 487		
SUPER LOCK MAGNETIC HOLDERS		TYPE	I-mm ↔	HEX	(NX) DESIGN	S2 STEEL	Cr PLATING	Ø 11 S SIZE	Ø 13 M SIZE	Ø 15 L SIZE	AMOUNT IN A PACK	ORD. NUMBER
		PH1-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 447
		PH2-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 449
		PH3-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 451
		PZ1-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 453
		PZ2-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 455
		PZ3-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 457
		T10-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 459
		T15-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 461
		T20-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 463
		T25-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 465
		T30-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 467
		T40-25 BLACK	25	•	•	•	•	•	•	•	20	65 404 469
		H4-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 471
		H5-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 473
		H6-25 BLACK	25	•	•	•	•	•	•	•	20	65 404 475
		F4-25 ORANGE	25	•	•	•	•	•	•	•	20	65 404 477
		F5-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 479
		F6-25 BLUE	25	•	•	•	•	•	•	•	20	65 404 481

7-BIT BOX

7-piece (pocket) set of screwing Industrial-CrV bits



Delivery includes - C6.3 bits (25 mm): \oplus PZ1, PZ2
 \oplus PH1, PH2 \ominus 5, 6 mm

E6.3/C6.3 (60 mm) magnetic bit holder

Order number: 65 404 058

37-BIT BOX

37-piece set of screwing Industrial-CrV bits and nut driver bits



Delivery includes - Socket heads: \odot 4, 4.5, 5, 6, 7, 8 mm
C6.3 bits (25 mm): \oplus PZ0, PZ1, PZ2, PZ3 \oplus PH0, PH1, PH2, PH3
 \ominus T10, T15, T20, T25, T30, \odot H2, H2.5, H3, H4, H5, H5.5, H6
 \ominus 3, 4, 5, 6, 7 mm \odot S0, S1, S2, S3

E6.3/ \blacksquare $\frac{1}{4}$ " (25 mm) socket head holder
E6.3/C6.3 (60 mm) magnetic bit holder

Order number: 65 404 060

60-BIT BOX

60-piece set of screwing Industrial-CrV bits



Delivery includes - C6.3 bits (25 mm):

\oplus 3x PZ0, 3x PZ1, 4x PZ2, 3x PZ3 \oplus 2x PH0,
2x PH1, 3x PH2, 2x PH3 \ominus T8, T9, T10, T15, T20, T25, T27,
T30, T35, T40 \odot H1.5, H2, H2.5, H3, H4, H5, H5.5, H6, H7, H8
 \ominus 2x 3, 2x 4, 2x 5, 2x 5.5, 2x 6, 2x 7 mm

E6.3 bits (50 mm): \oplus PZ1, PZ2, PZ3 \ominus 5, 6 mm
E6.3/C6.3 (60 mm) magnetic bit holder

Order number: 65 404 062

29-BIT BOX

29-piece set of screwing Industrial-CrV bits



Delivery includes - C6.3 bits (25 mm): \oplus PZ0, 2x PZ1,
2x PZ2, PZ3 \oplus PH0, PH1, PH2, PH3 \ominus T8, T10, T15, T20, T25, T30, T40
 \odot H2, H3, H4, H5, H5.5, H6 \ominus 3, 4, 5, 6, 7 mm

E6.3/C6.3 (60 mm) magnetic bit holder

Order number: 65 404 059

54-BIT BOX M

54-piece set of screwing Industrial-CrV bits with magnetic organiser



Delivery includes - C6.3 bits (25 mm): \oplus 2x PZ0, 2x PZ1,
2x PZ2, 2x PZ3 \oplus 2x PH0, 2x PH1, 2x PH2, 2x PH3 \ominus T8, T9, T10, T15,
T20, T25, T27, T30, T35, T40 \odot H1.5, H2, H2.5, H3, H4, H5, H5.5, H6,
H7, H8 \ominus 3, 4, 5, 5.5, 6, 7, 8 mm \odot M5, M6, M8
 \ominus TW1, TW2, TW3, TW4 \odot S1, S2, S3

E6.3/C6.3 (60 mm) magnetic bit holder

Order number: 65 405 501

80-BIT BOX

80-piece set of screwing Industrial-CrV bits



Delivery includes - C6.3 bits (25 mm): \oplus 2x PZ0, 2x PZ1,

3x PZ2, 2x PZ3 \oplus PH0, PH1, 3x PH2, PH3 \ominus T8, T9, T10, T15, T20, T25,
T27, T30, T35, T40 \odot TX10, TX15, TX20, TX25, TX27, TX30, TX35 \odot

H1.5, H2, H2.5, H3, H3.5, H4, H4.5, H5, H5.5, H6, H7, H8 \odot H2T, H2.5T,
H3T, H4T, H5T, H6T \ominus 3, 4, 5, 5.5, 6, 7 mm \odot SP4, SP6, SP8, SP10
E6.3 bits (50 mm): \oplus PZ0, PZ1, PZ2, PZ3 \oplus PH0, PH1, PH2, PH3
 \ominus T10, T15, T20, T25, T27, T30 \ominus 3, 4, 5, 6, 7 mm

E6.3/C6.3 (60 mm) magnetic bit holder

Order number: 65 404 064

127-BIT BOX

127-piece set of Industrial-CrV screwdriver bits

Delivery includes - C6.3 bits (25 mm): PZ0, PZ1, 5× PZ2, 2× PZ3

PH0, PH1, 5× PH2, PH3 T8, T10, T15, T20, T25, T27, T30, T40, T45

TX8, TX10, TX15, TX20, TX25, TX27, TX30, TX35, TX40

H1.5, H2, H2.5, H4, H5, H6, H7, H1/6", H5/64", H3/32", H7/64", H1/8", H5/32",

H3/16", H7/32", H1/4" 2× H2T, 2× H2.5T, 2× H3T, 2× H4T, 2× H5T, 2× H6T

3, 4, 3× 4.5, 3× 5, 3× 5.5, 6, 6.5, 7, 8 mm S0, S1, S2, S3 SP4, SP6, SP8, SP10

TQ6, TQ8, TQ10 C1, C2, C3 M5, M6, M8 TW1, TW2, TW3, TW4,

Special bit for fastening and unfastening hooks

E6.3 bits (50 mm): 2× PZ2 2× PH2 4.5 mm

E6.3 bits (75 mm): PZ1, 2× PZ2, PZ3 PH1, 2× PH2, PH3 5 mm

E6.3 bits (150 mm): PZ2, PZ3 PH2, PH3 6 mm

E6.3/C6.3 (60 mm) magnetic bit holder

E6.3/E6.3 (60 mm) magnetic bit holder

SDS-plus/E6.3 (80 mm) magnetic bit holder

E6.3/ (25 mm) socket head holder

E6.3/ (50 mm) socket head holder

/ adapter

Order number: 65 404 065





ELECTRIC TOOLS





◀ DRILLS ▶

- Drills can be used for drilling into most of the well-known construction materials precisely and cleanly. Drilling into brick or concrete walls requires the use of an impact drill.
- One of the biggest advantages of NAREX drills is time-tested quality of the motor and the transmission. Optimised gearing geometry in the new generation of drills significantly extends the service life of the machine and ensures quieter operation; aluminium gearbox improves the stability and cooling of the transmission system.
- Ergonomic handle shape provides an ideal grip and precise pressure application directly to the drilling axis. Handling the machine is even more comfortable due to the machine's large on/off switch and easily accessible rotation direction switch. No high-quality drill would be complete without electronics which play a vital role in a smooth start-up and speed control.
- Aside from basic drilling functions, drills can also be used for screwing, grinding with a sanding extension or for mixing and stirring construction materials.

DRILL / WITH EXTRA HIGH SPEED NON-IMPACT



 **left-/right-handed rotation** |  **el. speed regulation**

DRILL ▶

EV 13 F-H3

Rated power input	650 W
Max. drilling dia.	
in steel/in aluminium/in wood	13/16/25 mm
Idle speed	0-4 000 /min
Max. torque	7.5 Nm
Chuck range	1.5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	1.5 kg

DELIVERY INCLUDES

Quick-release chuck (00 619 614), depth stop rod for setting drilling depth (66 591 611), detachable handgrip (00 592 979), cardboard box

Ord. number: 00 624 196

- ▶ For industrial production, assembly and maintenance
- ▶ Drill holes into resilient materials efficiently thanks to compact and short gearbox arranged for high speeds
- ▶ Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- ▶ Electronic speed control for setting the optimal rotation speed
- ▶ Smooth start-up for comfortable and safe drilling
- ▶ Quick-release chuck for swift tool change

DRILL / WITH A WIDE RANGE OF USES NON-IMPACT



two-speed transmission



left-/right-handed rotation



el. speed regulation

DRILL ▶

EV 13 E-2H3

Rated power input	650 W
Max. drilling dia.	
in steel/in aluminium/in wood	13/16/35 mm
Idle speed	
1 st gear	0-1 100 /min
2 nd gear	0-3 000 /min
Max. torque	
1 st /2 nd gear	29/10 Nm
Chuck range	1.5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	1.7 kg

DELIVERY INCLUDES

Quick-release chuck (00 619 614), depth stop rod for setting drilling depth (66 591 611), detachable handgrip (00 592 979), cardboard box

Ord. number: **00 624 193**

- ▶ For industrial production, assembly and maintenance
- ▶ Versatile use in drilling into soft or hard construction materials thanks to a powerful motor and a robust two-gear transmission
- ▶ Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- ▶ Electronic speed control for setting the optimal rotation speed
- ▶ Smooth start-up for comfortable and safe drilling
- ▶ Quick-release chuck for swift tool change

DRILL / ROBUST AND POWERFUL DRILL WITH A WIDE RANGE OF USES NON-IMPACT



two-speed transmission



left-/right-handed rotation



el. speed regulation

DRILL

EV 13 G-2

Rated power input	760 W
Max. drilling dia. in steel/in aluminium/in wood	13/20/45 mm
Idle speed	
1 st gear	0-1 000 /min
2 nd gear	0-3 050 /min
Max. torque	
1 st /2 nd gear	44/15 Nm
Chuck range	1.5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	2.5 kg

DELIVERY INCLUDES

Toothed-ring chuck (65 404 516), detachable handgrip SOFTGRIP (65 404 720), depth stop rod for setting drilling depth (66 622 322), cardboard box

Ord. number: **65 404 729**

- For industrial production, assembly and maintenance
- Versatile use in drilling into soft or hard construction materials thanks to a powerful motor and a robust two-gear transmission
- Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- Electronic speed control for setting the optimal rotation speed
- Smooth start-up for comfortable and safe drilling
- Rubber-coated accessories in the gripping area improve grip and machine handling



-  **ability to switch off hammer action**
-  **two-speed transmission**
-  **left-/right-handed rotation**
-  **el. speed regulation**

◀ IMPACT DRILL ▶

EVP 13 E-2H3

Rated power input	650 W
Max. drilling dia. in steel/in aluminium/in wood/in brickwork	13/16/35/16 mm
Idle speed	
1 st gear	0-1 100 /min
2 nd gear	0-3 000 /min
Idle hammer-action impacts	
1 st gear	0-22 000 /min
2 nd gear	0-60 000 /min
Max. torque	
1 st /2 nd gear	29/10 Nm
Chuck range	1.5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	1.8 kg

DELIVERY INCLUDES

Toothed-ring chuck (65 404 516), depth stop rod for setting drilling depth (66 591 611), detachable handgrip (00 592 979), cardboard box

Ord. number: 00 624 029

- ▶ For construction/assembly work and maintenance
- ▶ Versatile use in drilling into soft or hard construction materials thanks to a hammer-action mechanism and a robust two-gear transmission
- ▶ Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- ▶ Electronic speed control for setting the optimal rotation speed
- ▶ Smooth start-up for comfortable and safe drilling

DRILL / ROBUST AND POWERFUL IMPACT WITH A WIDE RANGE OF USES



 **ability to switch off hammer action**

 **two-speed transmission**

 **left-/right-handed rotation**

 **el. speed regulation**

IMPACT DRILL

EVP 13 G-2H3

Rated power input	760 W
Max. drilling dia. in steel/in aluminium/in wood/in brickwork	13/20/45/20 mm
Idle speed	
1 st gear	0-1 100 /min
2 nd gear	0-3 050 /min
Idle hammer-action impacts	
1 st gear	0-22 000 /min
2 nd gear	0-61 000 /min
Max. torque	
1 st /2 nd gear	44/15 Nm
Chuck range	1,5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	2,5 kg

DELIVERY INCLUDES

Toothed-ring chuck (65 404 516), depth stop rod for setting drilling depth (66 622 322), detachable handgrip SOFTGRIP (65 404 720), cardboard box

Ord. number: **00 631 549**

- For construction/assembly work and maintenance
- Versatile use in drilling into soft or hard construction materials thanks to a hammer-action mechanism and a robust two-gear transmission
- Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- Electronic speed control for setting the optimal rotation speed
- Smooth start-up for comfortable and safe drilling
- Rubber-coated accessories in the gripping area improve grip and machine handling



aut. spindle arrest

ability to switch off hammer action

two-speed transmission

left-/right-handed rotation

el. speed regulation

◀ IMPACT DRILL ▶

EVP 13 G-2A

Rated power input	760 W
Max. drilling dia.	
in steel/in aluminium/in wood/in brickwork	13/20/45/20 mm
Idle speed	
1 st gear	0-1 000 /min
2 nd gear	0-3 050 /min
Idle hammer-action impacts	
1 st gear	0-22 000 /min
2 nd gear	0-61 000 /min
Max. torque	
1 st /2 nd gear	44/15 Nm
Chuck range	1.5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	2.5 kg

DELIVERY INCLUDES

Quick-release chuck (00 764 657), depth stop rod for setting drilling depth (66 622 322), detachable handgrip SOFTGRIP (65 404 720), systainer SYS-TL 2 (65 403 694)

Ord. number: 65 403 763

- ▶ For construction/assembly work and maintenance
- ▶ Versatile use in drilling into soft or hard construction materials thanks to a hammer-action mechanism and a robust two-gear transmission
- ▶ Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- ▶ Electronic speed regulation for setting optimal rotation speeds depending on the Typee of material and work
- ▶ Smooth start-up for comfortable and safe drilling
- ▶ Automatic arrest of the spindle for simpler tool change
- ▶ Rubber-coated accessories in the gripping area improve grip and machine handling



safety clutch



**ability to switch off
hammer action**



two-speed transmission



left-/right-handed rotation



el. speed regulation

◀ IMPACT DRILL ▶

EVP 13 H-2C

Rated power input	1100 W
Max. drilling dia.	
in steel/in aluminium/in wood/in brickwork	16/24/45/24 mm
Idle speed	
1 st gear	0-1 000 /min
2 nd gear	0-2 800 /min
Idle hammer-action impacts	
1 st gear	0-20 000 /min
2 nd gear	0-56 000 /min
Max. torque	
1 st /2 nd gear	65/22,5 Nm*
Chuck range	1.5-13 mm
Fastening neck dia.	43 mm
Spindle thread	1/2"-20 UNF
Weight	2.6 kg

* Blocking torque is limited electronically

DELIVERY INCLUDES

Toothed-ring chuck (65 404 516), depth stop rod for setting drilling depth (66 622 322), detachable handgrip SOFTGRIP (65 404 720), cardboard box

Ord. number: 00 763 321

- ▶ For construction/assembly work and maintenance
- ▶ Versatile use in drilling into soft or hard construction materials thanks to a hammer-action mechanism and a robust two-gear transmission
- ▶ Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- ▶ Full-wave control electronics maintain constant work speed
- ▶ Electronic speed control for setting the optimal rotation speed
- ▶ Smooth start-up for comfortable and safe drilling
- ▶ Electronic safety clutch protects the operator should the machine jam
- ▶ Rubber-coated accessories in the gripping area improve grip and machine handling



 **safety clutch**

 **ability to switch off
hammer action**

 **two-speed transmission**

 **left-/right-handed rotation**

 **el. speed regulation**

IMPACT DRILL

EVP 16 K-2

Rated power input	1 050 W
Max. drilling dia. in steel/in brickwork/in wood	16/30/55 mm
Idle speed	
1 st gear	0-970 /min
2 nd gear	0-1 750 /min
Idle hammer-action impacts	
1 st gear	0-970 /min
2 nd gear	0-1 750 /min
Max. torque	
1 st gear/2 nd gear	62.5/35 Nm
Chuck range	3-16 mm
Fastening neck dia.	57 mm
Spindle thread	5/8"-16UN-2A
Weight	3.8 kg

DELIVERY INCLUDES

Toothed-ring chuck (65 404 518), depth stop rod for setting drilling depth (66 592 447), telescopic detachable handgrip (66 622 578), cardboard box or systainer SYS-TL 2 MIDI (65 403 696)

Ord. number: **00 765 486**

- For construction/assembly work and maintenance
- Versatile use in drilling into soft or hard construction materials thanks to a hammer-action mechanism and a robust two-gear transmission
- Quality mounting of transmission in a stable aluminium box improves performance and extends service life
- Electronic speed regulation for setting optimal rotation speeds depending on the type of material and work
- Smooth start-up for comfortable and safe drilling
- Mechanical friction clutch, telescopic detachable handgrip and spade handle improve safety during work at high tightening torques



◀ GROUND DRILL BITS FOR METAL

HSS-G MSP ▶




◀ COBALT DRILL BITS FOR METAL

HSS-Co MSP ▶



◀ CARBON DRILL BITS FOR WOOD

CS-R WP ▶

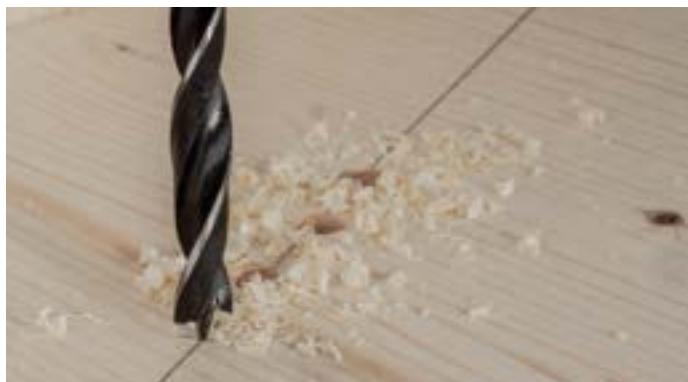

◀ GROUND DRILL BITS FOR WOOD

HSS-G WSP ▶



◀ HAMMER-ACTION DRILL

2E BP ▶



◀ DRILL BITS FOR CONCRETE

SDS-PLUS 4E BSP ▶



Explanatory notes:



Steel



Alloyed
steel



Soft
wood



Hard
wood



Plastic
(PVC, acrylic
etc.)



Masonry



Concrete
Reinforced
concrete



Fastening
SDS-PLUS



High-speed
steel



High-speed
steel with 5%
added cobalt

◀ METAL HSS-G STAR ▶

Ground drill bits for standard everyday drilling into steel

- High-speed steel tools drill up to 40 % faster while requiring up to 50 % less pressure when compared to HSS-R (rolled) drill bits
- Thanks to a point angle of 135°, there is no need to use a puncher for drilling up to a diameter of 10 mm

SUPERPROFI 



METAL STAR


METAL STAR Drill Bit Sets



Type	Set contents	Amount per pack	Ord. number
5-SET HSS-G MSP	3, 4, 5, 6, 8 mm	5-piece set	65 405 599
13-SET HSS-G MSP	1.5-6.5 × 0.5 mm + 3.3 mm + 4.2 mm	13-piece set	65 405 601
19-SET HSS-G MSP	1-10 × 0.5 mm	19-piece set	65 405 602
25-SET HSS-G MSP	1-13 × 0.5 mm	25-piece set	65 405 603

◀ METAL HSS-Co STAR ▶

High-performance drill bits for challenging work in standard and alloyed steels

- High-speed steel with 5 % added cobalt boasts excellent heat conduction capabilities, allowing the drill bits to withstand a greater workload.

SUPERPROFI 



METAL STAR


METAL STAR - COBALT drill bit sets




Type	Set contents	Amount per pack	Ord. number
5-SET HSS-Co MSP	3, 4, 5, 6, 8 mm	5-piece set	65 405 604

◀ WOOD CS-R STAR ▶

Wood-boring drill bits for craftsmen and discerning handymen

- Drill bits made from carbon steel are especially suitable for drilling in soft wood, such as pinewood. You can also achieve good results in harder wood, such as oak or ash.

PROFI 

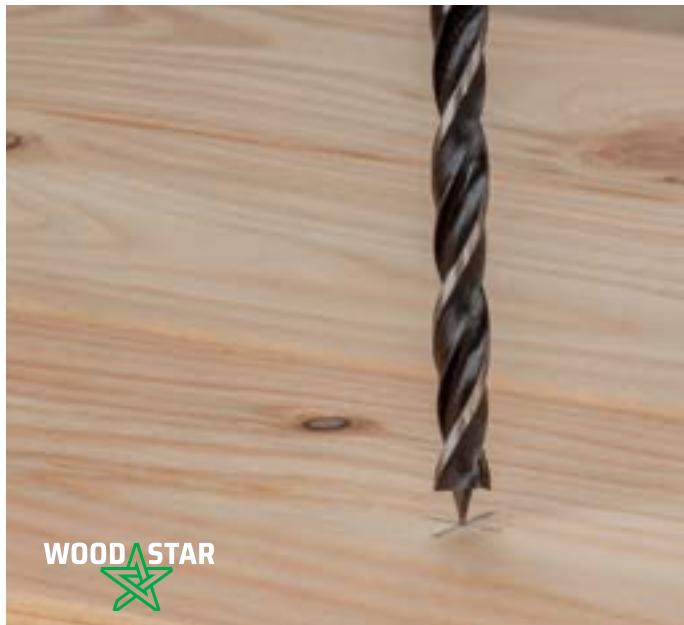

WOOD STAR Drill Bit Sets

Type

Set contents

Amount per pack

Ord. number



5-SET CS-R WP

4, 5, 6, 8, 10 mm

5-piece set

65 405 605

◀ WOOD HSS-G STAR ▶

Drill bits for fast and precise drilling into any kind of wood

- High-speed steel is heat-stable and therefore always makes a clean and precise hole.
- Special cradle construction and centering tip allow for precise guidance into the material.

SUPERPROFI 



WOOD STAR Drill Bit Sets

Type

Set contents

Amount per pack

Ord. number



5-SET HSS-G WSP

4, 5, 6, 8, 10 mm

5-piece set

65 405 607

◆ BETON 2E STAR ◆

Drill bits for impact drilling into concrete

- Plates of tungsten carbide precisely positioned in the carbon steel body provide high performance and lasting durability.
- The helix on the body efficiently removes the drilled material out of the hole.

PROFI 



BETON STAR Drill Bit Sets	Type	Set contents	Amount per pack	Ord. number
 	8-SET 2E BP	3, 4, 5, 6, 6, 8, 8, 10 mm	8-piece set	65 405 608

◆ BETON SDS-PLUS 4E STAR ◆


SDS-Plus hammer drill bits

- 4 edges made of the highest quality tungsten carbide, with exceptional impact resistance.
- Double helix construction enables precise and fast drilling, while preserving the durability of the bit.


SUPERPROFI 



BETON STAR - SDS PLUS Drill bit sets	Type	Set contents	Amount per pack	Ord. number
 	5-SET SDS-4E BSP	5-6 x 110 mm 6-8-10 x 160 mm	5-piece set	65 405 610
	7-SET SDS-4E BSP	5-6-8 x 110 mm 6-8-10-12 x 160 mm	7-piece set	65 405 612




► UNIQUE GEOMETRY, ASTONISHING ACCURACY, HIGH PRODUCTIVITY ►

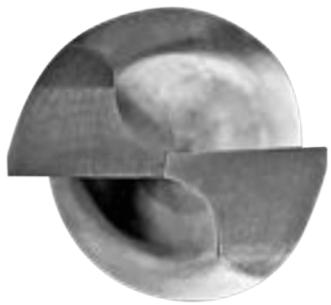


NAREX Ground Metalboring Drill Bits, HSS CZ002

- The length dimensions of the CZ002 high-performance drill bits fulfil the requirements of the DIN 338 standard; their unique geometry, developed based on years of experience, makes these drill bits some of the best high-speed steel tools on the market when used for materials with strength of up to 900 N.mm², especially for steels, non-ferrous metals, aluminium alloys and plastics.
- Unlike the standard and most wide-spread drill bits designated HSS by international standard DIN 338 RN or domestic standard PN2913, drilling with the new CZ002 drill bits allows using up to 30 % lower feeding force and up to 25 % lower cutting torque for the same amount of work done. The uniqueness of the CZ002 drill bits lies not in different material, but in the new, revolutionary geometry of the entire tool. The unique properties of the CZ002 drill bits were also confirmed by the results of long-term laboratory testing by the University of Technology in Brno.

Up to 30 % lower feeding force

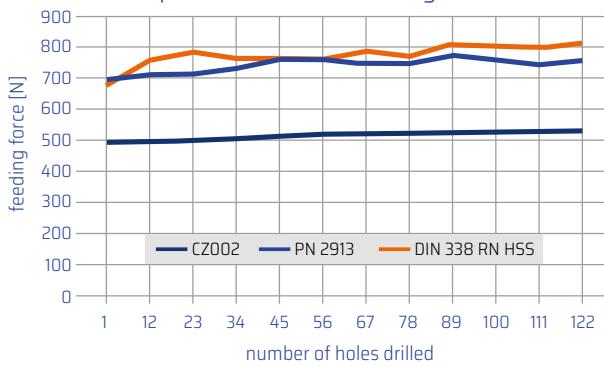

Up to 25 % lower cutting torques

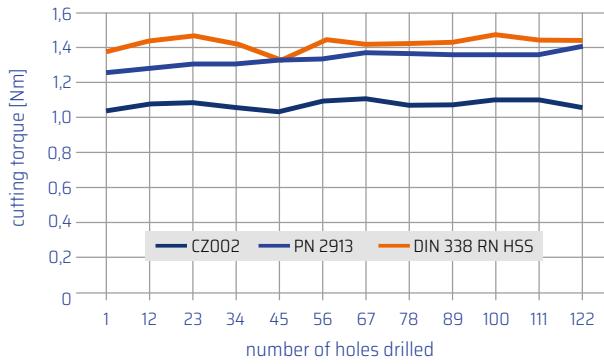


► DRILL BITS FOR METAL HSS CZ002, ground ►

dia (mm)	L ₂ (mm)	L ₁ (mm)	Amount in a pack	Ord. number
0.3	19	4	10	00 763 364
0.4	20	5	10	00 763 365
0.5	22	6	10	00 763 366
0.6	24	7	10	00 763 367
0.7	28	9	10	00 763 368
0.8	30	10	10	00 763 369
0.9	32	11	10	00 763 370
1.0	34	12	10	00 763 371
1.1	36	14	10	00 763 372
1.2	38	16	10	00 763 373
1.3	38	16	10	00 763 374
1.4	40	18	10	00 763 375
1.5	40	18	10	00 763 376
1.6	43	20	10	00 763 377
1.7	43	20	10	00 763 378
1.8	46	22	10	00 763 379
1.9	46	22	10	00 763 380
2.0	49	24	10	00 763 381
2.1	49	24	10	00 763 382
2.2	53	27	10	00 763 383
2.3	52	27	10	00 763 384
2.4	57	30	10	00 763 385
2.5	57	30	10	00 763 386
2.6	57	30	10	00 763 387
2.7	61	33	10	00 763 388
2.8	61	33	10	00 763 389
2.9	61	33	10	00 763 390
3.0	61	33	10	00 763 391
3.1	65	36	10	00 763 392
3.2	65	36	10	00 763 393
3.3	65	36	10	00 763 394
3.4	70	39	10	00 763 395
3.5	70	39	10	00 763 396
3.6	70	39	10	00 763 397
3.7	70	39	10	00 763 398
3.8	75	43	10	00 763 399
3.9	75	43	10	00 763 400
4.0	75	43	10	00 763 401
4.1	75	43	10	00 763 402
4.2	75	43	10	00 763 403
4.3	80	47	10	00 763 404
4.4	80	47	10	00 763 405
4.5	80	47	10	00 763 406
4.6	80	47	10	00 763 407
4.7	80	47	10	00 763 408
4.8	86	52	10	00 763 409
4.9	86	52	10	00 763 410
5.0	86	52	10	00 763 411
5.1	86	52	10	00 763 412
5.2	86	52	10	00 763 413
5.3	86	52	10	00 763 414
5.4	93	57	10	00 763 415
5.5	93	57	10	00 763 416
5.6	93	57	10	00 763 417
5.7	93	57	10	00 763 418
5.8	93	57	10	00 763 419
5.9	93	57	10	00 763 420
6.0	93	57	10	00 763 421
6.1	101	63	10	00 763 422
6.2	101	63	10	00 763 423
6.3	101	63	10	00 763 424
6.4	101	63	10	00 763 425
6.5	101	63	10	00 763 426
6.6	101	63	10	00 763 427
6.7	101	63	10	00 763 428
6.8	109	69	10	00 763 429
6.9	109	69	10	00 763 430

DRILL BITS FOR METAL HSS CZ002, ground ▶

dia (mm)	L ₂ (mm)	L ₁ (mm)	Amount in a pack	Ord. number
7.0	109	69	10	00 763 431
7.1	109	69	10	00 763 432
7.2	109	69	10	00 763 433
7.3	109	69	10	00 763 434
7.4	109	69	10	00 763 435
7.5	109	69	10	00 763 436
7.6	117	75	10	00 763 437
7.7	117	75	10	00 763 438
7.8	117	75	10	00 763 439
7.9	117	75	10	00 763 440
8.0	117	75	10	00 763 441
8.1	117	75	10	00 763 442
8.2	117	75	10	00 763 443
8.3	117	75	10	00 763 444
8.4	117	75	10	00 763 445
8.5	117	75	10	00 763 446
8.6	125	81	10	00 763 447
8.7	125	81	5	00 763 448
8.8	125	81	5	00 763 449
8.9	125	81	5	00 763 450
9.0	125	81	5	00 763 451
9.1	125	81	5	00 763 452
9.2	125	81	5	00 763 453
9.3	125	81	5	00 763 454
9.4	125	81	5	00 763 455
9.5	125	81	5	00 763 456
9.6	133	87	5	00 763 457
9.7	133	87	5	00 763 458
9.8	133	87	5	00 763 459
9.9	133	87	5	00 763 460
10.0	133	87	5	00 763 461
10.1	133	87	5	00 763 462
10.2	133	87	5	00 763 463
10.3	133	87	5	00 763 464
10.4	133	87	5	00 763 465
10.5	133	87	5	00 763 466
10.6	133	87	5	00 763 467
10.7	142	94	5	00 763 468
10.8	142	94	5	00 763 469
10.9	142	94	5	00 763 470
11.0	142	94	5	00 763 471
11.1	142	94	5	00 763 472
11.2	142	94	5	00 763 473
11.3	142	94	5	00 763 474
11.4	142	94	5	00 764 298
11.5	142	94	5	00 764 299
11.6	142	94	5	00 764 300
11.7	142	94	5	00 764 301
11.8	142	94	5	00 764 302
11.9	151	101	5	00 764 303
12.0	151	101	5	00 764 304
12.1	151	101	5	00 764 305
12.2	151	101	5	00 764 306
12.3	151	101	5	00 764 307
12.4	151	101	5	00 764 308
12.5	151	101	5	00 764 309
12.6	151	101	5	00 764 310
12.7	151	101	5	00 764 311
12.8	151	101	5	00 764 312
12.9	151	101	5	00 764 313
13.0	151	101	5	00 764 314
13.5	160	108	5	00 764 315
14.0	160	108	5	00 764 316
14.5	169	114	1	00 764 317
15.0	169	114	1	00 764 318
15.5	178	120	1	00 764 319
16.0	178	120	1	00 764 320

UNIQUE GEOMETRY, ASTONISHING ACCURACY, HIGH PRODUCTIVITY ▶

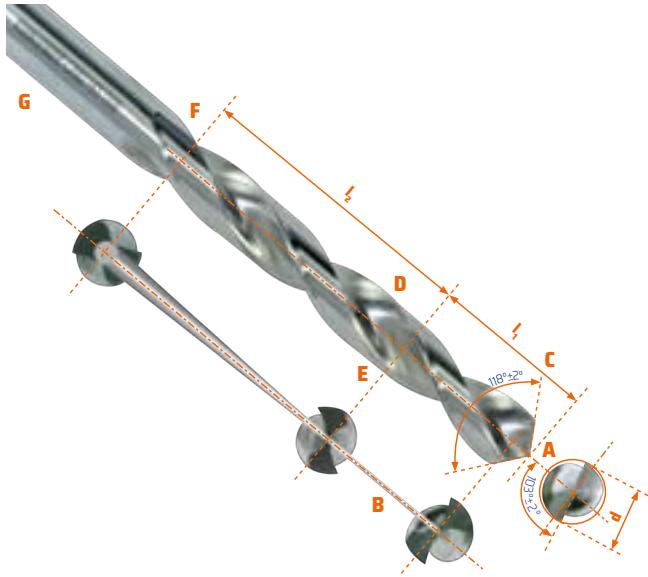

A: The tip of CZ002 drill bits guarantees high dimensional and geometrical accuracy and contributes to high drill bit stability even when drilling at higher speeds.

B: Very thin core, constant in length " l_1 ", significantly reduces the axial force required for drilling and the resulting heat generated in the process. Thanks to smooth increases in thickness (in the direction towards the drill bit shank), the drill bit retains its high rigidity.

C: Constant core thickness in the frontal portion of the CZ002 drill bit enables repeated grinding in length " l_1 " while maintaining the same geometry of the drill bit tip.

D: Low roughness of the ground surfaces of the CZ002 drill bit reduces frictional forces during drilling and chip removal.

E: Low land width guarantees minimal friction of the land on the walls of the drilled material when properly guided.

F: The lead angle and geometry of the spiral of the CZ002 drill bit creates optimal conditions for the creation and removal of chips and supply of coolant.

G: Laser markings on the tool shank for quick drill bit identification.

ATTENTION!

Drill bits with CZ002 geometry are not designed for enlarging holes!

◀ HIGH PERFORMANCE, LONG SERVICE LIFE, STABLE QUALITY ▶



◀ METALBORING DRILL BITS HSS CZ002, with Shank Stepped to 12.7 mm ▶

dia (mm)	L ₂ (mm)	L ₁ (mm)	Amount in a pack	Ord. number
13.5	160	108	5	00 764 321
14.0	160	108	5	00 764 322
14.5	169	114	1	00 764 323
15.0	169	114	1	00 764 324
15.5	178	120	1	00 764 325
16.0	178	120	1	00 764 326


Name	Type / Description	Ord. number
 Set of metal-boring drill bits HSS CZ002 7-piece	7-SET CZ002 dia. 3, 4, 5, 6, 7, 8, 10 mm	00 763 332
 Set of metal-boring drill bits HSS CZ002 13-piece	13-SET CZ002 dia. 1.5-6.5 x 0.5 mm + 3.3 + 4.2 mm	00 763 355
 Set of metal-boring drill bits HSS CZ002 19-piece	19-SET CZ002 dia. 1.0-10.0 x 0.5 mm	00 763 358
 Set of metal-boring drill bits HSS CZ002 24-piece	24-SET CZ002 dia. 1.0-10.0 x 0.5 mm + 3.3 + 4.2 + 6.8 + 10.2 + 10.5 mm	00 763 359
 Set of metal-boring drill bits HSS CZ002 25-piece	25-SET CZ002 dia. 1.0-13.0 x 0.5 mm	00 763 360

◀ CUTTING COMPOUNDS ▶

Name	Description	Weight	Ord. number
 CIMTAP 80		80 g	00 763 331
 CIMTAP 300	Cutting paste for drilling and thread cutting, water dilutable, dilution ratio up to 1:4 (1 part paste : 4 parts water)	300 g	00 763 361
 CIMTAP 1000		1 000 g	00 763 362



► HIGH PERFORMANCE, LONG SERVICE LIFE, STABLE QUALITY ►

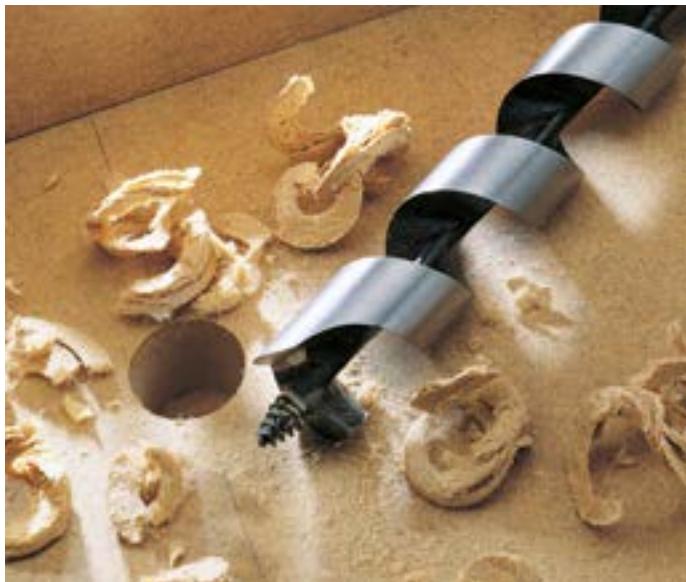


NAREX woodboring auger bits

with a threaded tip and two lateral pre-cutting edges are suitable for drilling deep and clean holes into robust wood. Smooth helix with optimal lead angle easily removes sizeable "shavings", hexagonal fastening shank ensures the drill bit is firmly fastened into the chuck and also ensures maximum torque transmission from the machine to the bit.

The drill bits are designed for carpentry, wooden structures, loft conversions and other constituent operations in solid wooden blanks.

Suitable for drilling into:

- soft wood
- hard wood
- rafters
- wooden beams
- chipboard
- plywood



► WOODBORING AUGER BITS ►

dia (mm)	L ₂ (mm)	L ₁ (mm)	Amount in a pack	Ord. number
6,0	230	155	1	00 647 627
8,0	230	155	1	00 647 570
14,0	230	155	1	00 647 573
22,0	230	155	1	00 647 590
26,0	230	155	1	00 647 592
8,0	320	245	1	00 647 649
10,0	320	245	1	00 647 651
12,0	320	245	1	00 647 652
16,0	320	245	1	00 647 654
18,0	320	245	1	00 647 655
20,0	320	245	1	00 647 656
28,0	320	245	1	00 647 661
30,0	320	245	1	00 647 662
16,0	460	385	1	00 647 582
24,0	460	385	1	00 647 598
28,0	460	385	1	00 647 600
32,0	460	385	1	00 647 626

► KEY-TYPE DRILL CHUCKS ►

Type	Technical parameters	Ord. number
CC 10-1/2	dia. 1-10 mm/1/2"-20 UNF	65 404 514
CC 10-B 12	dia. 1-10 mm, fastening cone B 12	65 404 515
CC 13-1/2	dia. 1.5-13 mm/1/2"-20 UNF	65 404 516
CC 13-B 16	dia. 1.5-13 mm, fastening cone B 16	65 404 517
CC 16-5/8	dia. 3-16 mm/5/8"-16 UN-3B	65 404 518
CC 16-B 16	dia. 3-16 mm, fastening cone B 16	65 404 519
CC 16-B 18	dia. 3-16 mm, fastening cone B 18	65 404 520

► RECOMMENDED ACCESSORIES: work gloves ►



Type	Ord. number
MG-L	00 648 610
MG-XL	00 649 087
MG-XXL	00 765 495
MG-XXXL	65 403 690

- antivibration, neoprene, palm padding
- breathable material with elastane admixture
- modern design
- comfortable cut
- long service life

◀ KEYS FOR TOOTHED-RING CHUCKS ▶



Type	Technical parameters	Ord. number
CK 10-6	for CC 10 chucks, with safety lock dia. 6 mm	65 404 523
CK 13-6	for CC 13 chucks, with safety lock dia. 6 mm	65 404 524
CK 16-8	for CC 16 chucks, with safety lock dia. 8 mm	65 404 525

◀ QUICK-RELEASE CHUCKS ▶



Type	Technical parameters	Ord. number
KC 10-1/2	dia. 1.0-10 mm / 1/2"-20 UNF, plastic jacket	00 647 526
KC 13-1/2	dia. 1.5-13 mm / 1/2"-20 UNF, plastic jacket	00 619 614
KC 13-1/2 MI	dia. 1.5-13 mm / 1/2"-20 UNF, for hammer-action, HM jaws	00 647 529

◀ DETACHABLE HANDGRIPS ▶



Type	Technical parameters	Ord. number
AH-43/185	for dia. 43 mm fastening neck, length 185 mm, for drill model series versions E, F	00 592 979
AH-43/185 AV	for dia. 43 mm fastening neck, length 185 mm, for drill model series versions G, H	65 404 720
AH-57/230	for dia. 57 mm fastening neck, length 230 mm, telescopic, for drill model series version K	66 622 578

◀ PRECISE - ECONOMICAL - PRACTICAL ▶



Toothed-ring chuck

Increases the fastening force thanks to its toothed-ring mechanism, as opposed to quick-release chucks. Chucks with a wider range may be equipped with a safety lock to secure the tool against accidental release during drilling or screwing.

Toothed-ring chucks are made of all-metal material and are intended for hand-held or stationary drills.



Quick-release chuck

is designed for fastening (tightening) the work tool in the machine quickly and manually. All-metal designs boast greater accuracy and wear resistance than chucks in plastic jackets.

Steel jaws may be fitted on their fastening surfaces with cemented carbide plates to improve grip and extend the service life of the chuck.



◀ MAGNETIC DRILLS ▶

► Installation firms often come across situations where they need to create openings in assembled or fixed metal structures, parts or devices. If these openings are to be made well and quickly, in complicated positions to boot, such as overhead, then magnetic drills are the ideal solution.

► A magnetic drill is essentially a combination of a hand-held drill and a stand with an electro-magnet. After the magnet is activated, it is drawn to all ferromagnetic materials (such as iron, steel, etc.), creating a firm connection between the drill and the machined material. The magnitude of the holding force is affected by the type of material itself, as well as its wall thickness and the quality of the workpiece surface.

► The magnetic drill represents an ideal machine set for drilling with spiral, but particularly core drill bits. These differ from spiral drill bits by not drilling off the entire area of the opening, but only its circumference, which significantly increases the work efficiency. In addition, such a compact machine delivers high accuracy, excellent controllability and good manoeuvrability – the drill is sufficiently small to be used even in tight spaces.

Morse Taper 2 Holder

WELDON 19

Weldon Holder

Individual core drill bits are fastened directly into the integrated Weldon 19 mm holder.

Special conversion adapters are used to fasten other tools.

EVM 40-2 M



Weldon Holder



EVM 32 EVM 32-2 RLE



6
MK 2 - WD 19
Adapter

Adapters



4
CA-EVM 32
adapter
for chuck

3
CC 13 -1/2
chuck



7
Adapter
for ZAD
machine
taps

Tools

Drill bits
with
a cylindrical
shank



1
Core drill
bits

Machine
taps



Drill bits with
the
MK 2
taper shank

MAGNETIC DRILL



ELDON
19

dovetail slide

cooling

electric magnet

protection against restart

MAGNETIC DRILL ▶

EVM 32

Rated power input	900 W
Max. drilling dia.	
spiral drill bit	13 mm
core drill bit	32 mm
Idle speed	600 rpm
Speed under load	450 rpm
Elevation	160 mm
Tool fastening	Weldon 19 mm (3/4")
Magnetic base	168 x 84 mm
Weight	12 kg

DELIVERY INCLUDES

Cutting fluid tank (65 405 057), centring point for short core drill bits (65 403 741), hex key, safety belt, transport case

Ord. number: **65 403 533**

- Compact machine for industrial production, assembly and maintenance
- Powerful motor and specially arranged transmission for high performance and reliability
- High elevation range thanks to a robust and precise dovetail slide
- Extremely powerful magnet for safe work in any position
- Integrated cutting fluid feed for targeted tool cooling
- Protection against accidental machine start after a power failure
- To achieve the best results, we offer fully ground core drill bits made of high-speed steel

MAGNETIC DRILL / TWO-SPEED WITH ELECTRONICS



WELDON
19



el. speed regulation

1
2
2-speed gearbox



dovetail slide



cooling



electric magnet



protection against restart

MAGNETIC DRILL ▶

EVM 32-2 RLE

Rated power input	1150 W
Idle speed	
1 st gear	70-270 rpm
2 nd gear	100-500 rpm
Left-sided rotation	YES
Max. drilling dia.	
spiral drill bit	13 mm
core drill bit	32 mm
Fastening	Weldon 19 mm
Magnet base dimensions	168 × 84 mm
Elevation	160 mm
Weight	13 kg

DELIVERY INCLUDES

Container for coolant (65 405 057), centring point for core drill bits (65 403 741), hex key, safety strap, briefcase

Ord. number: **65 404 954**

- Universal machine for industrial production, assembly and maintenance
- Full-wave control electronics maintain constant work speed
- Electronic speed control for setting the optimal rotation speed
- Versatile use due to a powerful motor and a robust two-speed transmission
- Quality mounting of the transmission into a stable aluminium box improves load capacity and extends service life
- High elevation range thanks to a robust and precise dovetail slide
- Extremely powerful magnet for safe work in any position
- Integrated cutting fluid feed for targeted tool cooling
- Protection against accidental start of the machine after a power failure

MAGNETIC DRILL / TWO-SPEED



MORSE
Mk 2

1
2
2-speed gearbox



dovetail slide



cooling



electric magnet



protection against restart

MAGNETIC DRILL ▶

EVM 40-2 M

Rated power input	1150 W
Max. drilling dia.	
spiral drill bit	18 mm
core drill bit	40 mm
Idle speed	
1 st gear	400 rpm
2 nd gear	730 rpm
Speed under load	
1 st gear	250 rpm
2 nd gear	450 rpm
Elevation	160 mm
Tool fastening	MK 2,19 mm Weldon (3/4")
Magnetic base	168 x 84 mm
Weight	13 kg

DELIVERY INCLUDES

Cutting fluid tank (65 405 057), centring point for short core drill bits (65 403 741), adapter Morse 2-Weldon 19 (65 404 182), hex key, safety belt, transport case

Ord. number: 65 403 930

- Universal machine for industrial production, assembly and maintenance
- Fasten the tools directly with MK 2
- Versatile use thanks to a powerful motor and a robust two-speed transmission
- Quality mounting of transmission in a stable aluminium box improves load capacity and extends service life
- High elevation range thanks to a robust and precise dovetail slide
- Extremely powerful magnet for safe work in any position
- Integrated cutting fluid feed for targeted tool cooling
- Protection against accidental start of the machine after a power failure

1. Core drill bits made of HSS for drilling metal

are ground out from full core material on CNC machine centres. The precision of their manufacturing ensures that shavings are flawlessly removed and reduces the need to apply force during drilling.

2. Centring point and its functions

- Centring - after having precisely positioned the centring point in the middle of the future opening and turning on the magnet, the drill and the tool are both in optimal position for drilling
- Dosing - the centring point makes sure the cutting fluid is dosed correctly and automatically
- Ejection - due to a pre-stressed spring, the centring pin pushes on the drilled material and pushes the core out of the opening in the final drilling stage



	Name	dia. (mm)	Fastening	Cut depth in mm	Ord. number
1	Ground Metalboring Core Drill Bits, HSS	12	Weldon	30	65 403 534
		13	Weldon	30	65 403 535
		14	Weldon	30	65 403 536
		15	Weldon	30	65 403 537
		16	Weldon	30	65 403 538
		17	Weldon	30	65 403 539
		18	Weldon	30	65 403 540
		20	Weldon	30	65 403 541
		21	Weldon	30	65 403 542
		22	Weldon	30	65 403 543
		23	Weldon	30	65 403 544
		24	Weldon	30	65 403 545
		25	Weldon	30	65 403 546
		26	Weldon	30	65 403 547
		30	Weldon	30	65 403 548
		32	Weldon	30	65 403 549
		35	Weldon	30	65 403 932
		40	Weldon	30	65 403 933
2	Centring point	6.25	Weldon	75	65 403 741

	Name	Type	Ord. number
3	Toothed-ring chuck with key	CC 13 1/2	65 404 516
4	Chuck adapter	CA-EVM 32	65 403 742
5	Coolant tank	CT-EVM	65 405 057
6	MK2 - WD19 adapter	CA-EVM 40	65 404 182
7	Adapter for M10 tap	ZAD 10 WD 19	65 404 959
	Adapter for M12 tap	ZAD 12 WD 19	65 404 960
	Adapter for M14 tap	ZAD 16 WD 19	65 405 141
	Adapter for M16 tap	ZAD 16 WD 19	65 404 961

All packages contain 1 pc.

3. Tothed-ring chuck

- Makes fastening short-length drill bits with cylindrical shank possible. Lets you use cylindrical drill bits in drills with the Weldon holder when combined with a chuck adapter.

4. Chuck adapter

- Used for mounting a chuck with a 1/2" UNF thread.

5. Coolant tank

- When drilling with core drill bits, it is recommended to use a work fluid and dose it from the tank that is included in the packaging of every magnetic drill.

6. MK2 - WD19 adapter

- Drills with the Morse taper holder are delivered along with an adapter for mounting core drill bits with Weldon fastening.

7. Tap adapter

- M10, M12, M14 and M16 taps can be used in magnetic drills with the help of an adapter.



◀ DRILLING HAMMERS SDS-PLUS ▶

► NAREX electro-pneumatic drilling hammers are designed primarily for impact-drilling into hard construction materials, such as reinforced concrete, standard and rubble concrete, concrete prefabs and natural stones; tangentially also for non-impact drilling into soft construction materials and for driving.

► The high efficiency of impact-drilling is ensured by an electro-pneumatic mechanism which, unlike in impact drills, uses a "cylinder - piston - ram - tool" mechanism and a simple fastening system (SDS-plus) to enable loss-free transmission of energy from the machine to the tip of the tool and its linear reversible motion. The end result is a high force produced by the tool without the need for increased pressure on the machine on the

part of the user, all the while drilling with large-diameter tools that are beyond the range of possibilities for classic impact drills!

► Hammers designated as "combined" are multi-purpose machines fitted with a mechanism for eliminating the rotary movement of the tool and using the full energy of the machine for chiselling motions. Hammers designated as "chiselling" hammers are single-purpose machines without the ability to drill.

► The latest model series of NAREX hammers builds on an exceptionally durable and compact design, characterised by very low operating costs and simple regular maintenance.



SDS-PLUS



safety clutch



**ability to switch off
hammer action**



left-/right-handed rotation



el. speed regulation

◀ DRILLING HAMMER ▶

EKV 21 SPEEDDrill

Tool fastening	SDS-plus
Rated power input	700 W
Recommended dia. for drilling into concrete	4-10 mm
Max. drilling dia. in concrete / brickwork	20/20 mm
Max. drilling dia. in wood / steel	30/13 mm
Max. screw dia. for wood	8 mm
Rpm when idle	0-3 200 rpm
Number of impacts when idle	0-5 000 ipm
Impact energy	2.3 J
Fastening neck dia.	43 mm
Weight	2.3 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 600), depth stop (65 404 603), SDS-plus adapter for ½"- 20 UNF thread (65 404 604), quick-release chuck 13 mm (00 619 614), transport case (65 404 607)

Ord. number: **65 404 580**

- Ideal for interiors and decorating high-rise flats
- Suitable for minor installation work and anchoring
- Unique hammer-action system **SPEEDDrill** combines the efficiency of a hammer with the speed of an impact drill
- Work modes: hammer-action drilling, non-impact drilling, alt. screwing
- Ergonomic composite handle with **CONTROLVIBRATIONSYSTEM** antivibration joint absorbs vibrations and reduces their harmful effects
- Quick and comfortable drill bit change, thanks to a fastening head fitted with the SDS-plus system
- Quick-release chuck with adapter for non-impact drilling
- Safety slip clutch for a sensitive disconnection system
- Comfortable detachable **SOFTGRIP** with a depth stop adjustment button



FAST FIX



SDS-plus



toggle rotation off



safety clutch



ability to switch off
hammer action



left-/right-handed rotation



el. speed regulation

COMBINED HAMMER ▶

EKK 31-QS QuickSYSTEM

Tool fastening	SDS-plus
Rated power input	850 W
Recommended dia. for drilling into concrete	8-18 mm
Max. drilling dia. in concrete / brickwork	30/82 mm
Max. drilling dia. in wood / steel	40/13 mm
Max. screw dia. for wood	10 mm
Rpm when idle	0-1 500 rpm
Number of impacts when idle	0-5 000 ipm
Impact energy	4.0 J
Fastening neck dia.	54 mm
Weight	3.6 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 601), depth stop (65 404 603), QS-HAMMER fastening head (65 404 605), QS-DRILL fastening head (65 404 606), transport case (65 404 608)

Ord. number: **65 404 582**

- Multi-functional drilling hammer for installation and assembly
- Work modes: hammer-action drilling, chiselling, non-impact drilling, alt. screwing
- Robust L-shaped gearbox made of aluminium die casting improves the rigidity of the entire construction and extends the service life of the gearing and the motor
- Ergonomic composite handle with **CONTROLVIBRATIONSYSTEM** anti-vibration joint absorbs vibrations and reduces their harmful
- Effects **QUICKSYSTEM** head change for quick conversion from hammer to drill:
 - QS-HAMMER fastening head for SDS tools
 - QS-DRILL fastening head for standard drill bits with a cylindrical or hexagonal shank
- Adjustable chisel position in a 0-360° range
- Safety slip clutch for a sensitive disconnection system
- Comfortable detachable **SOFTGRIP** with a depth stop adjustment button

ADVANTAGES / EKK 31-QS COMBI HAMMER

The reliable and efficient design of the new NAREX line of drilling, chisel and combined hammers is characterised by very low operating costs and allows simple and cheap regular maintenance of the individual tools. Thanks to the carefully chosen and thoroughly tested materials used in the hammer action and transmission mechanism, NAREX electro-pneumatic hammers boast some of the best drilling and chiselling performance on the market.



Aside from allowing quick change between impact drilling into concrete and non-impact drilling into wood and metal, their elegant quick-change head system, called **QUICKSYSTEM**, also enables very user-friendly reduction of operating costs, associated with regular maintenance and repairs of one of the most heavily stressed tools in existence!

**QUICKSYSTEM
HAMMER**
INSTALLATION EXPERT



The QS-HAMMER quick-change head is fitted with an arrestable system for SDS-plus drilling and chiselling accessories. The fitting (arresting) and removing (releasing) of the drill bit can be done easily with one hand. The drilling depth can be readily adjusted using a large adjustment button with a depth stop located on the detachable **SOFTGRIP** handle.



Ingenious arrangement of the transmission mechanism of multi-functional hammer NAREX EKK 31-QS enables comfortable and lossless activation of any of the power tool's work modes (from left to right):
 ► impact drilling, adjustment
 ► of chisel position in 0-360° range
 ► chiselling
 ► non-impact drilling


The ribbed switch does not protrude beyond the outline of the machine and is located directly in the operator's line of sight so that it is always readily at hand.



The ergonomic composite handle SOFTGRIP allows the power tool to be held above its centre of mass, resulting in better control and handling. The anti-vibration joint **CONTROLVIBRATIONSYSTEM** absorbs vibrations and reduces their negative effects. The reversing button for switching between rotation to the right and left is within reach of the main switch to enable basic control of the tool with just one hand.

If the need calls for a chisel hammer, then one with a transverse motor position is the right choice!

A motor mounted this way is protected by a robust and rigid bearing lid made of aluminium die casting. Unlike motors arranged in the classic drill shape, this L-shaped mounting provides a much better absorption of external destructive stress caused by prying the chisel from the material.

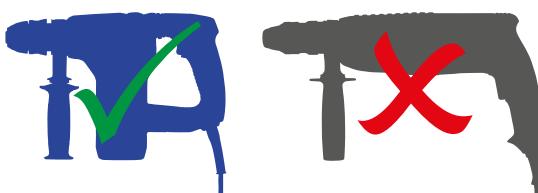



◀ IMPACT WRENCHES ▶

NAREX electric impact wrenches are synonymous with usage in demanding conditions in many areas of metalworking or heavy manufacturing, in the repair and maintenance of heavy construction machinery, in vehicular and railway traffic and in the installation of metal structures and long-distance lines. Thanks to their exceptional performance, they are suitable for fastening and unfastening a wide range of high-strength metric screw joints.

The robust, yet relatively simple design of the percussion mechanism of the wrenches is capable of creating very high tightening torques. When under load, the percussion mechanism transforms the power of the motor into even, rotary impacts, which is extremely important for fastening or unfastening even decrepit or rusted bolts.

- ▶ Working with the impact wrenches is very simple and comfortable, since they do not stress the arms nor the attention of the operator (unlike, for instance, some of the more powerful drills or screwdrivers) due to their eliminating the potential for kickback.
- ▶ Short one-handed variant with a central hand-grip, known as T-Shape, is well-balanced and offers a very favourable ratio between weight and maximum output.



SLIM DESIGN

impact mechanism

high Torque

bit holder on the spindle

bit holder on the spindle

left-/right-handed rotation

el. speed regulation

◀ IMPACT WRENCH ▶

ESR 500

Rated power input	480 W
Idle speed	0-2 600 /min
Impacts under load	0-3 000 /min
Max. tightening torque	570 Nm
Fastening	1/2"
Use range	M10-M22
Fastening on the spindle	latch pin
Cable length	4.0 m
Weight	1.52 kg

DELIVERY INCLUDES

Reducing adapter AD-ASR 14 (00 633 760), belt clip (65 404 228), systainer SYS-TL 1 (65 403 693)

Ord. number: 65 404 193

- The most powerful compact wrench on the market
- For industrial and engineering production, automotive industry, workshop environments, repair and maintenance facilities, machinery
- Simple application without the need for additional pressure from the user, absorption of reaction torque
- Efficient impact mechanism for unfastening and fastening high-strength metric screw joints and anchoring and installing construction panels
- Reducing adapter for using driver bits and drill bits with E6.3 fastening
- Ergonomically designed **SOFTGRIP** handle improves grip, control and machine handling
- Softgrip rubber **SOFTGRIP** cover protects the material from mechanical damage
- Tool-less belt clip for work in heights and easier installation work



-  **impact mechanism**
-  **high Torque**
-  **bit holder on the spindle**
-  **bit holder on the spindle**
-  **left-/right-handed rotation**
-  **el. speed regulation**

IMPACT WRENCH

ESR 800

Rated power input	500 W
Idle speed	0-1 700 /min
Impacts under load	0-2 100 /min
Max. tightening torque	1 100 Nm
Fastening	1/2"
Use range	M12-M30
Fastening on the spindle	circlip
Cable length	4.0 m
Weight	3.1 kg

DELIVERY INCLUDES

AD S12/S34 conversion adapter (65 404 555), belt clip spona (65 404 248), systainer SYS-TL 2 (65 403 694)

Ord. number: 65 404 195

- The most powerful cabled wrench on the market
- For industrial and engineering production, the automotive industry, cargo transport, workshop environments, repair and maintenance facilities, machinery
- Simple application without the need for additional pressure from the user, reaction torque absorption
- Efficient impact mechanism for unfastening and fastening high-strength metric screw joints and anchoring and installing construction panels
- Well-balanced and ergonomically shaped design with softening elements improves handling, grip and machine control
- Softgrip rubber **SOFTGRIP** cover protects the material from mechanical damage and enables holding the machine at the most stressed point
- Double-sided belt clip for work in heights and easier installation work

IMPACT WRENCHES / RECOMMENDED USE INTERFACES

Technical data	ASR 200-SB	ASR 200-3SB	ASR 600-3SB	ASR 600-3MTB	ASR 600-3HTB	ESR 500	ESR 800
							
Voltage / Power input	20 V	20 V	60 V	60 V	60 V	480 W	500 W
Max. tightening torque - 1 st mode	300 Nm	120 Nm	150 Nm (AM)	250 Nm (AM)	600 Nm	570 Nm	1100 Nm
2 nd mode		260 Nm	250 Nm (AM)	500 Nm (AM)	1000 Nm		
3 rd mode		260 Nm (AM)	540 Nm	1000 Nm	1690 Nm		
Max. loosening torque	430 Nm	350 Nm	750 Nm	1500 Nm	2050 Nm	720 Nm	1390 Nm
Max no. of strokes	0-3 000 /min	0-3 000 /min	0-3 000 /min	0-2 400 /min	0-2 400 /min	0-3 000 /min	0-2 100 /min
Fastening on the spindle	1/2" square	1/2" square	1/2" square	1/2" square	3/4" square	1/2" square	1/2" square
Weight (incl. accumulator)	1.4 kg	1.35 kg	2.15 kg	3.50 kg	3.85 kg	1.5 kg	3.1 kg
Transition adapter in the pack	AD S12/HEX	AD S12/HEX	AD S12/HEX	AD S12/S34	AD S34/S12	AD S12/HEX	AD S12/S34

Type	Dimension	Operating mode	M4*	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30	M36
			7 mm**	8 mm	10 mm	13 mm	17 mm	19 mm	22 mm	24 mm	27 mm	30 mm	32 mm	36 mm	41 mm	46 mm	56 mm
ASR 200-SB	1																
	1																
ASR 200-3SB	2																
	3 (AM)																
ASR 600-3SB	1 (AM)																
	2 (AM)																
	3																
ASR 600-3MTB	1 (AM)																
	2 (AM)																
	3																
ASR 600-3HTB	1																
	2																
	3																
ESR 500	1																
ESR 800	1																

* Metric dimension ** Attachment dimension AM – Auto Mode

Type							
ASR 200-SB							
ASR 200-3SB							
ASR 600-3SB							
ASR 600-3MTB							
ASR 600-3HTB							
ESR 500							
ESR 800							



◀ GRINDERS ▶

► NAREX grinders and sanders are designed for constant daily use. Powerful, high-quality motors guarantee high productivity and very long service life. The controls and gripson the grinders meet all the ergonomic requirements and fully reflect the needs of professional users. The assortment of NAREX professional electric tools includes a complete line of compact angle and one-handed straight grinders.

► Angle grinders are designed for universal use. They are adapted to various applications in a wide range of professional fields. When combined with the appropriate accessories they can be used, for example, for precisely cutting metal pipes and profiles, grinding down weld joints, deburring various edges, removing coatings or rust, as well as cutting or grinding concrete, stone or tiling.

► NAREX grinders guarantee maximum protection and comfortable working conditions for the user.



SLIM DESIGN

 **protection against restart**

 **10 A** **SOFT START**

 **spindle arrest**

 **1.7 kg**

ANGLE GRINDER ▶

EBU 125-7

Rated power input	720 W
Idle speed	11 000 /min
Spindle thread	M14
Max. disc dia.	125 mm
Weight	1.7 kg

DELIVERY INCLUDES

Detachable handgrip (65 404 719), fastening nut wrench (66 619 743), fastening nut (66 591 572), flange (66 592 130), guard for grinding (65 404 340), cardboard box

Ord. number: 65 404 592

- ▶ Slim motor box with a circumference of only 185 mm makes the device easy to handle and perfect to manage
- ▶ Flat gearbox made of aluminium alloy for comfortable work even in tight spaces
- ▶ Optimised air circulation ensures perfect cooling as the temperature of the tool rises
- ▶ Switch with arresting to lock the machine in the on position
- ▶ Switch-on protection – prevents the device from being switched on separately after a power cut
- ▶ Spindle arrest – changes discs quickly and easily
- ▶ Specially designed replaceable air filters ensure protection against the ingress of coarse dirt into the motor area
- ▶ Adjustable side handgrip **SOFTGRIP**



SLIM DESIGN

protection against restart

10 A
SOFT START

spindle arrest

2 kg

ANGLE GRINDER ▶

EBU 125-10

Rated power input	950 W
Idle speed	11 000 rpm
Spindle thread	M 14
Max. disc dia.	125 mm
Weight	2.0 kg

DELIVERY INCLUDES

Detachable handgrip (65 404 719), fastening nut wrench (66 619 743), fastening nut (66 591 572), flange (66 592 130), guard for grinding (EBU 115-10 - 65 404 964, EBU 125-10 - 65 404 966), cardboard box

Ord. number: **65 404 596**

- **SLIM** DESIGN motor case with a circumference of a mere 188 mm for perfect control and easy handling
- Powerful 950 W motor for efficiently cutting and grinding materials
- Protection against accidental re-start in case of a power failure
- Optimised switch to lock the machine in the on position
- Ventilation holes with a special grate to cool the motor more efficiently without the ingress of coarse dirt
- Solid guard to provide high protection to the user
- Flat gearbox for comfortable work even in confined spaces
- Ergonomic detachable handle for a secure and safe grip on the machine
- More flexible work and easier movement around the work-piece, due to a 4 m long robust rubber cable
- Comfortable detachable **SOFTGRIP**



ADVANTAGES / ANGLE GRINDER EBU 125-7



Weighing only 1.7 kg as a result of the machine's convenient compact size (**290 x 104 mm**) makes work easier in any conditions.



Short and flat gearbox
made of high-quality aluminium alloy provides excellent heat conduction, guaranteeing a stability of shape and form.

Reliable arresting mechanism
makes exchanging tools for work possible.



Slim motor box SLIMDESIGN
with a circumference of only 180 mm and an ergonomically pleasant elliptical cross-section with a size of **55 x 59 mm** makes it comfortable to operate and guide the grinder single-handedly.




Transmission gearing
made of high-quality and superficially heat-treated steel boasts extremely low wear rate and ensures long service life and excellent force transmission.



Additional lateral air filters
with specially designed ridged grating improve the protection of the grinder against the ingress and sedimentation of dirt in the motor area, thus extending the service life of the machine.

ANGLE GRINDER / THE LIGHTEST AND MOST NIMBLE ANGLE GRINDER WITH ADDITIONAL AIR FILTERS

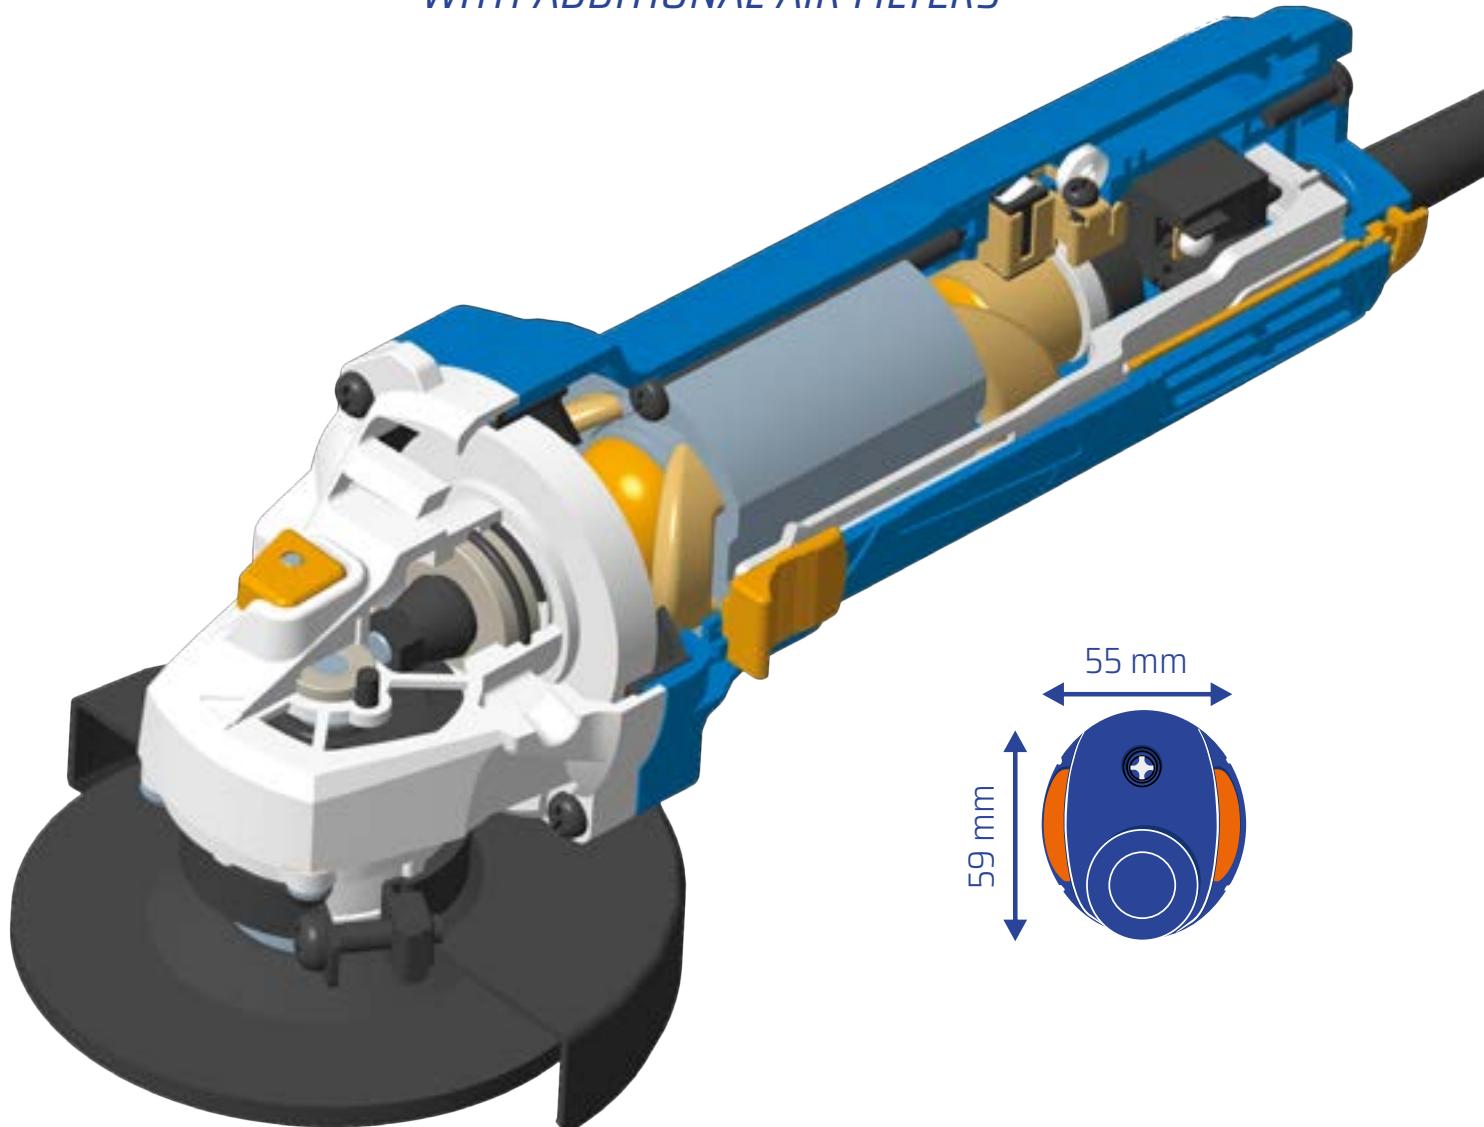

SLIM DESIGN

 protection against restart

 **10 A**
SOFT START

 spindle arrest

 **1.7 kg**

Ergonomically-shaped switch

button with protection against accidental start and locking in the on position is easily accessible, making controlling the machine comfortable and simple while increasing work safety.



Switch with protection against accidental start-up prevents

the machine from spontaneously turning on after a power failure.



 protection against restart

 KICK BACK STOP	 constant speed	 protection against overheating	 overload protection	 spindle arrest	 10 A SOFT START
---	---	---	--	---	--

ANGLE GRINDER ▶

EBU 125-12 C

Rated power input	1200 W
Max. disc dia.	125 mm
Idle speed	10 500 rpm
Spindle thread	M14
Weight	2.3 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 719), fastening nut wrench (66 619 743), fastening nut (66 591 572), flange (66 592 130), guard for grinding (00 764 501), guard wrench, cardboard box

Ord. number: **65 403 735**

- Special lubricating adhesive grease offers excellent protection against wear in a wide range of operating temperatures, thus significantly increasing the service life of the transmission
- Increased service life of the motor thanks to an XP protective grill on the rotor winding and epoxy resin protection of the stator bundle winding supplemented by silicone covering of the connectors

► Slim motor design forms a foundation for perfect manoeuvrability and makes the device ergonomic

► Ideal and safe manipulation in different working positions thanks to an anti-slip rubber-coated apron section

► Sprung detachable handgrip reduces the amount of harmful vibrations that are transmitted to the operator's arm

► Multi-functional digital electronics offer a number of safety features:

- **restriction of start-up current SOFTSTART** – for gentle machine start-up and gradual run-up to work speed

- **heat protection** – monitors operating temperature and protects the motor from overheating

- **current protection** – protects the machine against burning and the operator against injury should the tool jam in the material

- **protection against accidental re-start** – protects the operator against uncontrollable machine start-up after a power failure

- **constant electronics** – constant work speed under load for maximum grinding output

► Spindle arrest – change discs easily and quickly with just a single key

► Auto-disconnecting carbon brushes prevent rotor damage; once a brush is worn down, the rotor is automatically disconnected



 **spindle arrest**

 **protection against restart**

 **KICK BACK STOP**

 **constant speed**

 **overload protection**

 **protection against overheating**

 **10 A SOFT START**

◀ ANGLE GRINDER ▶

EBU 125-14 C

Rated power input	1400 W
Idle speed	11 000 rpm
Spindle thread	M14
Max. disc dia.	125 mm
Weight	2.3 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 719), fastening nut wrench (66 619 743), fastening nut (66 591 572), flange (66 592 130), guard for grinding (00 764 501), guard wrench, cardboard box

Ord. number: 65 403 736

- Patented aluminium-alloy gearbox solution with specially designed vents and an air-conducting insert that increase the air flow through the machine, improving its overall cooling
- Functional apron fitted with a system of intake openings for optimal cooling air supply

- Compact machine size and ergonomic gearbox shape with recessed arresting button increase the operating range and reach of the machine
- Ideal and safe manipulation in different working positions thanks to an anti-slip rubber-coated apron section
- Sprung detachable handgrip SOFTGRIP reduces the amount of harmful vibrations that are transmitted to the operator's arm
- Multi-functional digital electronics offer a number of safety features:
 - restriction of start-up current SOFTSTART** – for gentle start-up of the machine and gradual run-up to work speed
 - heat protection – monitors operating temperature and protects the motor from overheating
 - current protection** – protects the machine against burning and the operator against injury should the tool jam in the material.
 - protection against accidental re-start** – protects the operator against uncontrollable machine start-up after a power failure
 - constant electronics** – constant work speed under load for maximum grinding output
- Auto-disconnecting carbon brushes prevent rotor damage; once a brush is worn down, the rotor is automatically disconnected



 **protection against restart**

 **KICK BACK STOP**

 **constant speed**

 **FAST FIX**

 **overload protection**

 **protection against overheating**

 **spindle arrest**

 **el. speed regulation**

 **10 A SOFT START**

ANGLE GRINDER ▶

EBU 125-14 CE

Rated power input	1400 W
Idle speed	3 500-11 000 rpm
Spindle thread	M14
Max. disc dia.	125 mm
Weight	2.3 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 719), fastening nut wrench (66 619 743), quick-release nut (66 614 201), flange (66 592 130), guard for grinding (00 764 501), guard wrench, cardboard box

Ord. number: 65 403 737

- Patented aluminium-alloy gearbox solution with specially designed vents and an air-conducting insert that increase the air flow through the machine, improving its overall cooling
- Functional apron fitted with a system of intake openings for optimal cooling air supply
- Compact machine size and ergonomic gearbox shape with recessed arresting button increase the operating range and reach of the machine

► Ideal and safe manipulation in different working positions thanks to an anti-slip rubber-coated apron section

► Sprung detachable handgrip SOFTGRIP reduces the amount of harmful vibrations that are transmitted to the operator's arm

► Multi-functional digital electronics offer a number of safety features:

- **restriction of start-up current SOFTSTART** – for gentle start-up of the machine and gradual run-up to work speed
- **heat protection** – monitors operating temperature and protects the motor from overheating
- **current protection** – protects the machine against burning and the operator against injury should the tool jam in the material.

- **protection against accidental re-start** – protects the operator against uncontrollable machine start-up after a power failure

- **constant electronics** – constant work speed under load for maximum grinding output

- **speed regulation** – for setting optimal rotation speeds depending on the type of material and work

► Auto-disconnecting carbon brushes prevent rotor damage; once a brush is worn down, the rotor is automatically disconnected



protection against restart



10 A
SOFT START



spindle arrest



3.2 kg

ANGLE GRINDER ▶

EBU 150-16

Rated power input	1 600 W
Idle speed	9 000 rpm
Spindle thread	M14
Max. disc dia.	150 mm
Weight	3.2 kg

DELIVERY INCLUDES

Detachable handle (65 405 544), grinding guard (65 405 545), fastening nut wrench (66 619 743), flange (66 592 130) and fastening nut (66 591 572), guard wrench, cardboard box

Ord. number: 65 405 523

- Perfect control and easy handling thanks to ergonomic structure and compact design
- High-performance 1 600 W motor for efficient cutting and grinding of material
- Protection against accidental re-start in case of a power failure
- Optimal switch with a lock-on option
- Long life motor thanks to armoured winding on the stator harness and a rotor protection grill
- Durable guard for a high degree of user protection
- Aluminium-alloy transmission - long service life and high grinder reliability for everyday, long term use
- Ergonomic detachable handle for a firm grip on the machine
- Allows flexible work around the workpiece thanks to a 4 m long robust rubber cable



ANGLE GRINDER ▶

EBU 15-16 C

Rated power input	1 600 W
Idle speed	9 000 rpm
Spindle thread	M14
Max. disc dia.	150 mm
Weight	2.9 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 719), fastening nut wrench (66 619 743), fastening nut (66 591 572), flange (66 592 130), guard for grinding (66 405 980), guard wrench, cardboard box

Ord. number: 00 778 112

- ▶ Powerful extended motor guarantees stability and sufficient power for any use
- ▶ Long motor service life thanks to reinforced winding on the stator bundle and XP protective grill on the rotor
- ▶ Large switch with arresting capability to lock the machine in the on position
- ▶ Sprung detachable handgrip reduces the amount of harmful vibrations
- ▶ Multi-functional digital electronics:
 - start-up current restriction **SOFTSTART**
 - speed control function
 - PTC heat protection
 - current protection
 - protection against accidental start

ANGLE GRINDER / POWERFUL FOR UNIVERSAL USE REALPOWER



ANGLE GRINDER ▶

EBU 230-26

Rated power input	2 600 W
Idle speed	6 500 rpm
Spindle thread	M 14
Max. disc dia.	230 mm
Weight	6 kg

DELIVERY INCLUDES

Detachable handgrip (65 405 969), fastening nut wrench (66 619 743), fastening nut (66 591 572), flange (66 592 130), guard for grinding (65 404 968), guard wrench, cardboard box

Ord. number: **65 404 598**

- ▶ Angle grinder with a powerful 2 600 W motor for quick and efficient cutting, grinding and brushing of metals, as well as for cutting various construction materials
- ▶ Multi-functional electronics:
 - protection against accidental re-start - prevents the machine from starting spontaneously after a power failure
 - restriction of start-up current **SOFTSTART** - for gradual run-up to work speed
- ▶ Robust aluminium head with arresting button
- ▶ Compact design for easier handling and control
- ▶ Optimally 3 m long power cable
- ▶ Solid guard for greater user safety in the event of disc breakage
- ▶ Ergonomic detachable handle for a secure and safe grip on the machine
- ▶ Comfortable detachable **SOFTGRIP**



ANGLE GRINDER ▶

EBU 230-23 HD

Rated power input	2 300 W
Idle speed	6 600 rpm
Spindle thread	M14
Max. disc dia.	230 mm
Weight	5.5 kg

DELIVERY INCLUDES

Detachable vibration-absorbing handle (65 405 969), guard (65 405 902), fastening nut wrench (66 619 743), flange (66 592 130), fastening nut (66 591 572), cardboard box

Ord. number: **65 406 054**

- ▶ Heavy duty motor for maximum material removal rate and quick progress
- ▶ Reinforced winding improves protection of the motor against the abrasive effects of dust and guarantees its long life
- ▶ Protection against restart prevents the machine from restarting automatically after a power outage
- ▶ Restriction of start-up current **SOFTSTART** – for gradual run-up to work speed
- ▶ Dustproof switch with protection against accidental start-up and with lock-on function
- ▶ Extended and sprung detachable handle reduces the transfer of harmful vibrations and improves grip comfort
- ▶ Rubberised rear handle for safe grip and control
- ▶ Flat gearbox for work in confined spaces
- ▶ Tool-free adjustment of the guard
- ▶ 4 m rubber cable for high flexibility of use
- ▶ Auto-disconnecting carbon brushes prevent rotor damage
- ▶ Removable guard for quick and easy brush replacement



ANGLE GRINDER ▶

EBU 230-26 HD

Rated power input	2 600 W
Idle speed	6 600 rpm
Spindle thread	M14
Max. disc dia.	230 mm
Weight	6.0 kg

DELIVERY INCLUDES

Detachable vibration-absorbing handle (65 405 969), guard (65 405 902), fastening nut wrench (66 619 743), flange (66 592 130), fastening nut (66 591 572), cardboard box

Ord. number: **65 405 900**


- ▶ Compact design for improved handling and control
- ▶ Powerful and efficient 2,600 W motor with a large power reserve for the highest possible material removal rate and the fastest work progress
- ▶ Protection against restart – prevents the machine from starting automatically after a power failure
- ▶ Restriction of start-up current **SOFTSTART** – for gradual run-up to work speed
- ▶ Reinforced winding protects the motor from sharp dust and guarantees its long life
- ▶ Dustproof switch with protection against accidental start-up and with lock-on function
- ▶ Removable guard for quick and easy brush replacement
- ▶ Guard can be adjusted without the need for tools
- ▶ Rubberised rear handle for a safe grip
- ▶ Optimal and secure grip thanks to a detachable vibration-absorbing handle

► 2-IN-1 CUTTING DISC FOR CUTTING STANDARD AND HIGH-GRADE STEEL ►



- The cutting discs have been designed to be used on standard and high-grade steel
- Narex cutting discs are suitable for cutting sheet metal, sections, tubes, rods and solid material, for quick and convenient work without the risk of burrs
- The discs have a long life, stability, up to 35% increased output, and versatile application
- The discs are sintered in a special chamber where the exact binder/grain ratio is maintained
- The grain distribution is also monitored to achieve minimal disc vibration

- New premium binders and grains
- Ideal ratio of disc life and cutting speed
- Constant cutting performance
- Faster cuts of higher quality

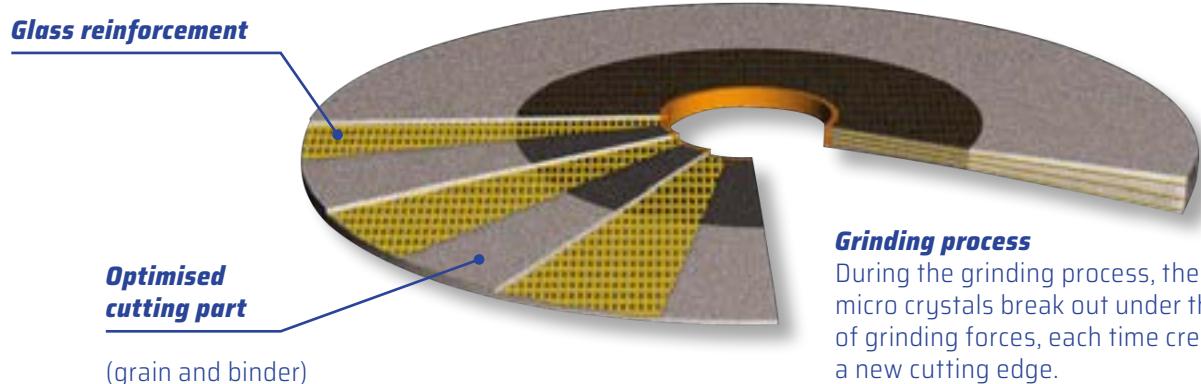

Grinding process

During the grinding process, the individual micro crystals break out under the action of grinding forces, each time creating a new cutting edge.

	Disc diameter (mm)	Disc thickness (mm)	Packaging (pcs)	Order number
RK Ø 115x1x22.2 A 60R-BFB INOX 41	115	1.0	1	65 405 157
			25	65 405 158
RK Ø 125x1x22.2 A 60R-BFB INOX 41	125	1.0	1	65 405 159
			25	65 405 160
RK Ø 115x1.6x22.2 A 46Q-BFB 41	115	1.6	1	65 405 161
			25	65 405 162
RK Ø 125x1.6x22.2 A 46Q-BFB 41	125	1.6	1	65 405 163
			25	65 405 164
RK Ø 150x1.2x22.2 A 60Q-BFB 41	150	1.2	1	65 405 155
			25	65 405 165
RK Ø 150x1.6x22.2 A 46Q-BFB 41	150	1.6	1	65 405 166
			25	65 405 167
RK Ø 230x1.9x22.2 A 46Q-BFB 41	230	1.9	1	65 405 168
			25	65 405 169

Disc Specifications

- A - classic corundum (aluminium oxide)
- 60 - grain size (16 coarse, 30 medium, 60 fine)
- Q - disc hardness grade - medium (resistance to grain loss)
- B - bonding agent with artificial resin
- F - fibre reinforcement
- 41 - flat disc design
- INOX - stainless steel

◀ GRINDING DISCS FOR GRINDING STANDARD AND HIGH-GRADE STEEL ▶



- ▶ High-performance roughing discs for dressing surfaces and edges with lower pressure applied and longer service life, specifically used for removing more material in a shorter time period, with 50% lower wear compared to commonly sold discs
- ▶ Suitable for standard structural steel, stainless steels, steel sheets, for deburring castings and grinding weld joints
- ▶ Narex grinding discs meet the requirements of international standards (EN 12413, OSA) and come equipped with all the necessary safety features
- ▶ The discs are designed for manually guided angle grinders with a max. peripheral speed of 80 m/s

	Disc diameter (mm)	Disc thickness (mm)	Packaging (pcs)	Order number
BK Ø 115×6×22.2 A 30Q BF	115	6	1	65 403 773
BK Ø 125×6×22.2 A 30Q BF	125	6	1	65 403 774
BK Ø 150×6×22.2 A 30Q BF	150	6	1	65 403 775
BK Ø 180×6×22.2 A 30Q BF	180	6	1	65 403 776
BK Ø 230×6×22.2 A 30Q BF	230	6	1	65 403 777

Disc Specifications

A – classic corundum (aluminium oxide)
 60 – grain size (16 coarse, 30 medium, 60 fine)
 Q – disc hardness grade – medium (resistance to grain loss)
 B – bonding agent with artificial resin
 F – fibre reinforcement



◀ DIAMOND CUTTING DISC TURBO PROFESSIONAL FOR CONSTRUCTION MATERIALS ▶



- ▶ Closed-edge disc with oblique segment and thin steel body for dry cutting
- ▶ High-cutting performance, thanks to constant speed with minimum vibration
- ▶ HOT PRESSED technology ensures a much higher hardness and resistance to wear
- ▶ Continuous closed turbo segment strip with a height of 7 mm
- ▶ Clean cutting edges, thanks to continuous segment strip
- ▶ Perforated steel carrier for improved cooling
- ▶ For hard and medium-hard construction materials

Disc diameter (mm)	Carrier thickness (mm)	Segment thickness (mm)	Segment height (mm)	Disc central diameter (mm)	Order number
115	1.2	2.0	7.0	22.2	65 405 142
125	1.2	2.0	7.0	22.2	65 405 143
150	1.4	2.2	7.0	22.2	65 405 144
230	1.8	2.6	7.0	22.2	65 405 145

OPTIMAL USE								STAND- ARD USE	OCCASIONAL USE			
Fired bricks, hollow bricks	Concrete blocks	Concrete kerbing	Concrete pavers	Hardened concrete	Roof tiles	Ceramic tiles	Terrazzo		Reinforced concrete	Fresh concrete	Earthenware	Sandstone

◀ DIAMOND DISC UNIVERSAL ▶



- ▶ Sintered discs, segment height of 7 mm
- ▶ For standard and medium hard construction materials

Disc diameter (mm)	Carrier thickness (mm)	Segment thickness (mm)	Segment height (mm)	Disc central diameter (mm)	Order number
115	1.5	2.0	7.0	22.2	00 647 566
125	1.5	2.0	7.0	22.2	00 647 505
150	1.5	2.0	7.0	22.2	00 647 687
230	2.0	2.5	7.0	22.2	00 647 506

◀ DIAMOND CUTTING DISC FOR CERAMICS TURBO CERAMIC ▶



- ▶ Closed-edge disc with oblique segment and thin steel body for dry cutting
- ▶ Very fast, clean and fine cut without burrs thanks to thin turbosegment
- ▶ HOT PRESSED technology ensures a much higher hardness and resistance to wear
- ▶ Perforated carrier for improved cooling and reduced noise
- ▶ Reinforced flange prevents the disc from warping upon overheating
- ▶ Super-thin disc with a segment thickness of a mere 1.4 mm
- ▶ Diamond turbo disc for any type of tiling, including sintered tiles, extra hard ceramic materials and thin boards of natural and artificial stone

Disc diameter (mm)	Carrier thickness (mm)	Segment thickness (mm)	Segment height (mm)	Disc central diameter (mm)	Order number
115	0.9	1.4	7.0	22.2	65 405 146
125	0.9	1.4	7.0	22.2	65 405 147


OPTIMAL USE									STAND-ARD USE	OCCASIONAL USE		
Fired bricks, hollow bricks	Heat-resistant bricks	Porcelain tiles	Roof tiles	Earthenware	Ceramic tiles	Terrazzo	Granite	Concrete blocks		Marble	Concrete pavers	Concrete kerbing

◀ 2-IN-1 LAMELLAR DISCS FOR GRINDING STANDARD AND HIGH-GRADE STEEL ▶



- Narex lamellar grinding discs are universal, professional tools suitable for versatile use
- These discs can be used to perfectly machine uneven surfaces or edges
- The use of zirconium-corundum abrasive grains on a stable carrier disc made of solid fibreglass results in a fine surface texture
- The discs have long life, up to 30% increased output, and universal application

- Perfect solution for different applications
- 30% increase in life and better grinding efficiency
- Very high specific removal of material
- 20% increase in the number of densely folded lamellae

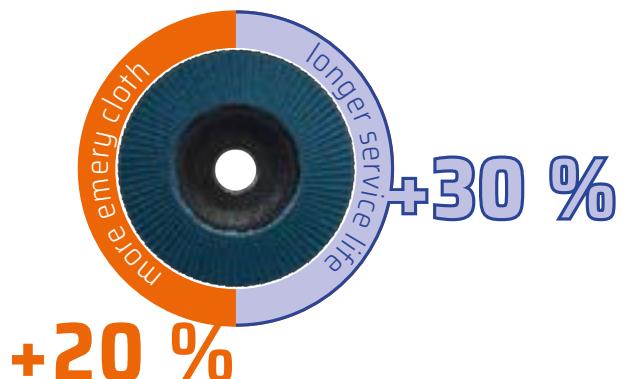

	Disc diameter (mm)	Grit	Packaging (pcs)	Order number
LK Ø 115×22.2 27 ZA 40	115	40	1	65 405 170
			10	65 405 171
LK Ø 115×22.2 27 ZA 60	115	60	1	65 405 172
			10	65 405 173
LK Ø 115×22.2 27 ZA 80	115	80	1	65 405 174
			10	65 405 175
LK Ø 115×22.2 27 ZA 120	115	120	1	65 405 176
			10	65 405 177
LK Ø 125×22.2 27 ZA 40	125	40	1	65 405 178
			10	65 405 179
LK Ø 125×22.2 27 ZA 60	125	60	1	65 405 180
			10	65 405 181
LK Ø 125×22.2 27 ZA 80	125	80	1	65 405 182
			10	65 405 183
LK Ø 125×22.2 27 ZA 120	125	120	1	65 405 184
			10	65 405 185
LK Ø 150×22.2 27 ZA 40	150	40	1	65 405 186
			10	65 405 187
LK Ø 150×22.2 27 ZA 60	150	60	1	65 405 188
			10	65 405 189
LK Ø 150×22.2 27 ZA 80	150	80	1	65 405 190
			10	65 405 191
LK Ø 150×22.2 27 ZA 120	150	120	1	65 405 192
			10	65 405 193

Disc Specifications

27 - disc shape - chamfered

40 - grain size (40 coarse, 80 medium, 120 fine)

ZA - zircon corundum

Solid fibreglass carrier disc

◀ VULCANISED FIBRE GRINDING DISCS ▶



- Vulcanised fibre cut-outs ensure easy and quick removal of material from the workpiece surface
- Universal vulcanised fibre cut-outs with corundum abrasive are designed for grinding a wide range of materials - wood, steel, stainless steel, non-ferrous metals and various types of paints
- Fibre discs remove a lot of material quickly and have a long service life
- Grinding discs with fastening onto a rubber carrier plate
- They can be used to sand down uneven surfaces when used with a supporting plate
- They can be used for rough to very fine grinding, due to the high grit range (24-120)

	Disc diameter (mm)	Grit	Packaging (pcs)	Order number
FK ø 115/grit R24 A	115	24	1	65 403 798
FK ø 115/grit R36 A	115	36	1	65 403 799
FK ø 115/grit R60 A	115	60	1	65 403 800
FK ø 115/grit R80 A	115	80	1	65 403 801
FK ø 115/grit R120 A	115	120	1	65 403 802
FK ø 125/grit R24 A	125	24	1	65 403 803
FK ø 125/grit R36 A	125	36	1	65 403 804
FK ø 125/grit R60 A	125	60	1	65 403 805
FK ø 125/grit R80 A	125	80	1	65 403 806
FK ø 125/grit R120 A	125	120	1	65 403 807
FK ø 150/grit R24 A	150	24	1	65 403 808
FK ø 150/grit R36 A	150	36	1	65 403 809
FK ø 150/grit R60 A	150	60	1	65 403 810
FK ø 150/grit R80 A	150	80	1	65 403 811
FK ø 150/grit R120 A	150	120	1	65 403 812

◀ DP-FD SUPPORTING CARRIER PLATE ▶



- The carrier disc is an ideal multi-purpose underlay for vulcanised fibre cut-outs
- The supporting disc provides the vulcanised fibre disc with the best support for achieving high grinding output

	Disc diameter (mm)	Packaging (pcs)	Order number
DP-FD ø 115/M14	115	1	65 403 813
DP-FD ø 125/M14	125	1	65 403 814
DP-FD ø 150/M14	150	1	65 403 815

Disc Specifications

RXX - grain size (24 coarse, 60 medium, 120 fine)

A - classic corundum

► WIRE BRUSHES ►



Cup Brush

- high-quality twisted hardened steel wires firmly pressed into a steel body increase the overall rigidity and aggressiveness of the brush for rough rust and paint removal, weld joints dressing, etc

Disc Brush

- thanks to the high peripheral speed, the brush is suitable for difficult to medium-difficult dressing work in hard to reach places (rust removal, weld joints dressing, paint removal, etc.)

STAINLESS design

- brush with stainless wires made of high-grade steel
- For stainless and acid-resistant high-grade steel and non-ferrous metals

► WIRE BRUSHES ►

Name	dia. / thickness	For angle grinders with disc dia.	Ord. number
Braided cup brush	dia. 65 / 0.50 M14	dia. 115, dia. 125, dia. 150	00 647 448
	dia. 65 / 0.50 M14 stainless	dia. 115, dia. 125, dia. 150	00 647 449
	dia. 80 / 0.50 M14	dia. 180, dia. 230	00 647 450
Wavy cup brush	dia. 75 / 0.30 M14	dia. 115, dia. 125, dia. 150	00 647 452
	dia. 115 / 0.50 x 22.2	dia. 115, dia. 125, dia. 150	00 647 453
Braided disc brush	dia. 150 / 0.50 x 22.2	dia. 150, dia. 180, dia. 230	00 647 454
	dia. 100 / 0.50 M14	dia. 115, dia. 125, dia. 150	00 647 456
Braided cone brush	dia. 115 / 0.50 M14	dia. 115, dia. 125, dia. 150	00 647 457
	dia. 110 / 0.30 M14	dia. 115, dia. 125, dia. 150	00 647 458
Wavy cone brush	dia. 110 / 0.30 M14	dia. 115, dia. 125, dia. 150	00 647 458

► EXTRAS ►

Type	Technical parameters	For angle grinders with disc dia.	Ord. number
Grinding guard	GC-ABU 125	dia. 125	65 405 743
	GC-EBU 115-6 /125-7	dia. 115	65 404 338
	GC-EBU 125-6 /125-7	dia. 125	65 404 340
	GC-EBU 115-10	dia. 115	65 404 964
	GC-EBU 125-10	dia. 125	65 404 966
	GC-EBU 12	dia. 115	00 764 547
	GC-EBU 13	dia. 125	00 764 501
	GC-ABU 150	dia. 150	65 405 745
	GC-EBU 15	dia. 150	66 405 980
	GC-EBU 15-14	dia. 150	65 404 748
For grinding/ cutting	GC-ABU 230	dia. 230	65 405 747
	GC-EBU 18 Fast Fix	dia. 180	66 636 392
	GC-EBU 23 Fast Fix	dia. 230	66 635 649
	GC-EBU 230-26	dia. 230	65 404 968
	GCC-EBU 150-16	dia. 150	65 405 545
	GCC-EBU 230-26 HD; EBU 230-23 HD	dia. 230	65 405 902
	CC-EBU 115-6/125-7	dia. 115	65 404 339
	CC-EBU 125-6/125-7	dia. 125	65 404 341
	CC-EBU 115-10	dia. 115	65 404 965
	CC-EBU 125-10	dia. 125	65 404 967
Cutting guard	CC-ABU 125	dia. 125	65 405 744
	CC-EBU 12	dia. 115	00 763 300
	CC-EBU 13	dia. 125	00 763 301
	CC-ABU 150	dia. 150	65 405 746
	CC-EBU 15	dia. 150	00 763 302
	CC-EBU 15-14	dia. 150	65 404 821
	CC-EBU 150-16	dia. 150	65 405 546
	CC-ABU 230	dia. 230	65 405 748
	CC-EBU 18 Fast Fix	dia. 180	00 763 303
	CC-EBU 23 Fast Fix	dia. 230	00 763 304
	CC-EBU 230-26	dia. 230	65 404 969

ACCESSORIES / FOR ANGLE GRINDERS

► ADDITIONAL ACCESSORIES ►



Type	Technical parameters	For angle grinders with disc dia.	Ord. number
Quick release nut	QRN 115-150 FastFix	115-150	65 406 436
Quick release nut	D 180-230 Fast Fix	150-230	66 614 202
Pin key	KF-EBU	115-230	66 619 743
Nut wrench ABU	KF-ABU	125-230	65 405 740
Adapter wrench ABU	KF-AD ABU	125-230	65 405 741
Fastening nut	UF-EBU M14	115-230	66 591 572
Flange	BF-EBU	115-230	66 592 130
Flange ABU	BF-ABU	125-230	65 405 742
Detachable handgrip	AH-M8	115-150	66 775 634
Detachable handgrip SOFTGRIP	AH-AV MB	115-150	65 404 719
Detachable handgrip VIBRASTOP	AH-M8 VIB	115-150	00 638 084
Detachable handgrip SOFTGRIP	AH-AV M10 EBU 150-16	150	65 405 544
Vibration-absorbing handle M10	AH -AV M10 ABU	125-230	65 405 738
M10/M8 handleadapter ABU	AD-ABU M10/M8	125-230	65 405 739
Detachable handgrip	AH-M14	180-230	66 775 635
Detachable handgrip VIBRASTOP	AH-M14 VIB	180-230	00 638 062
Vibration-absorbing handle	AH-AV M14	180-230	65 405 969



GRINDER STRAIGHT / EXTENDED STRAIGHT GRINDER WITH A HIGHER WORK RANGE



el. speed regulation



10 A
SOFT START

GRINDER STRAIGHT

EBD 30-8 / EBD 30-8 E

	EBD 30-8	EBD 30-8 E
Rated power input	700 W	700 W
Max. tool dia.	25 mm	25 mm
Idle speed	31 000 rpm	13 000–31 000 rpm
Collet dia.	3–8 mm	3–8 mm
Fastening neck dia.	43 mm	43 mm
Weight	1.5 kg	1.5 kg

DELIVERY INCLUDES

Detachable handgrip SOFTGRIP (65 404 720), fastening nut, 6 mm dia. collet (00 763 336), 2 keys (00 592 832), cardboard box

Ord. number: 00 763 327 (EBD 30-8)
00 763 325 (EBD 30-8 E)

- Elongated design enables efficient use of the machine even in hard to reach places
- Motor with rated power input of 700 W increases efficiency and work speed
- Multi-functional digital electronics offer a number of safety features:
 - restriction of start-up current **SOFTSTART** – for gentle machine start-up and gradual run-up to work speed
 - speed regulation – for setting optimal rotation speeds depending on the type of material and work
 - protection against accidental re-start – brings safety and security to the workplace in case an accidental switch-off or sudden power failure occur
- The machine's spindle is stably seated in a robust aluminium box and an elastic clutch between the motor shaft and the driving shaft ensures a smooth operation by reducing shocks and vibrations created in the machine
- The machine's variability is highlighted by the possibility of using a wide range of tools with 3; 6; 6.35 and 8 mm shanks
- Work accuracy can be increased by mounting a detachable handgrip via the fastening neck or to fasten the machine in a stationary position
- Auto-disconnecting carbon brushes prevent rotor damage; once a brush is worn down, the rotor is automatically disconnected





◀ SAWS ▶

► The common features of NAREX electric saws are high performance, modern design, reliability, and easy handling. Our assortment includes jig saws, circular saws, and chain saws to suit any type of work.

► The **jig saw** is one of the most versatile power tools. It allows the user to create fine curves, rounded shapes, circular cut-outs, or precise straight cuts in various types of material such as soft and hard wood, plywood, or chipboard, but also plastics, steel sheets, ceramics, or flooring and roofing. The reliability of all models of NAREX saws is guaranteed by their high-quality components, ergonomic design, options for optimal and easy handling, smart electronics for setting cutting speed based on the type of material, and their blade quick swap system. The hand-held electric circular saw is a very popular tool today and an integral part of the kit of

the majority of hobbyists and professionals from many fields. Structurally, it is a relatively simple machine. The key to its excellent utility and long service life is the quality of manufacture and smart structural improvements and details.

► NAREX electric chain saws can aid you in quickly and safely performing routine work around the house when cutting wood and logs, pruning, or cutting down trees. Compared to petrol saws, NAREX electric chain saws have several clear advantages: they are eco-friendly, do not require demanding maintenance, run more quietly, come equipped with all the necessary safety features, and guarantee efficient cutting with minimum effort thanks to a powerful motor, regardless of the model.

JIG SAW / PROFESSIONAL WITH PATENTED GUIDANCE OF THE SAW BLADE



extraction



pendulum movement of
the saw blade



FAST
FIX



el. speed regulation

JIG SAW

EPL 12-7 BE

Rated power input	720 W
Offcut	
in wood	to 200 mm
in non-ferrous metals	20 mm
in steel	10 mm
Cutting at angle	0°-45°
Stroke elevation	26 mm
Strokes	1 000-2 900 spm
Weight	2.4 kg

DELIVERY INCLUDES

Insert against material fraying (65 409 995), guard against loose splinters (65 404 761), extraction adapter (65 409 994), plastic (65 409 999) a and steel guide (65 409 998) plate insert, 2x saw blade, cardboard box

Ord. number: **65 404 742**

- Ergonomic and robust construction with **SOFTGRIP** anti-slip surface on the top handgrip for comfortable handling in any work position


- For shaped and straight cuts in solid wood, wood-based board materials, plastics, aluminium profiles and steel sheets
- Professional aluminium base plate, resistant against deformation for the most demanding uses
- High cut accuracy thanks to triple guidance of the blade with cemented carbide guide jaws
- Change saw blades simply and quickly with a tool-free system for fastening saw blades
- Four-stage oscillation adjustment for maximum speed and highest accuracy
- Electronic stroke frequency control for setting optimal cutting speed based on the type of material and work
- High-powered motor ensures high draw strength while also boasting smooth and quiet operation and long service life
- Extraction channels integrated in the saw table ensure sawdust is removed efficiently for perfectly clean working conditions
- For demanding straight and shaped cuts in solid wood, wood-based board materials, plastics, non-ferrous metals, aluminium profiles and steel sheets

ACCESSORIES / FOR JIG SAWS - SAW BLADES


◀ USE SPECIFICATIONS ▶

	Softwood Structural timber		Kitchen top		Stainless steel		Straight cut
	Hardwood		Laminate		Non-ferrous metals Aluminium		Curved cut
	Multiplex Glued timber		Plastic		Steel piping		Extra long blade
	Plywood		Reinforced plastic Epoxy resin		Open profile		Quick cut
	MDF		Steel		Wood and/ with nails		Very smooth cut
	Laminate board		Steel sheet		Sandwich-structured composite		Cut with burrs

◀ MARKING ▶

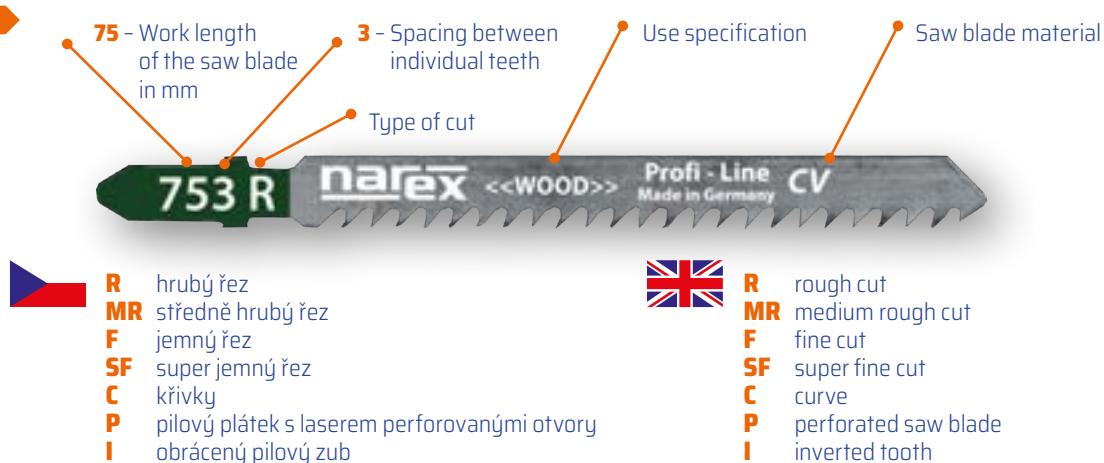


◀ TYPE OF CUT ▶



Precise Clean Cut

Tooth type: conical shape, ground to a tip.

Saw blades for precise, clean cuts in wooden materials and plastics.



Quick Rougher Cut

Tooth type: milled shape, spring-set.


Saw blades with a relatively rough cut and higher work rate in soft- and hardwood, plastic and non-ferrous metals.



High-speed Cut

Tooth type: conical shape, spring-set.

Saw blades with a medium rough cut and high cutting speed in all types of wooden materials.



Fine Clean Cut

Tooth type: finely milled shape, wavy.

Saw blades for fine, straight cuts in steel, aluminium, non-ferrous metals, plastics and sandwich-structured composites.

◀ MATERIAL ▶

CV

Chromium Vanadium

High-alloy chromium-vanadium steel for work in soft materials, such as wood, wood-fibre boards and synthetic materials.

BiM

Bi-Metal HRC

Perfect combination of flexibility and durability. Combining HSS and cobalt creates a flexible steel structure that always returns to its original shape. The saw blade is extremely resistant to wear and has a long service life. For processing wood, hard plastics, metals and sandwich-structured composites.

OVERVIEW OF RECOMMENDED APPLICATIONS FOR SAW BLADES

ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE

SBN 753 R **TOP**



Use

softwood, structural timber, multiplex, MDF, chipboard, blockboard, wood-fibre boards

Specification

quick, rougher cut

Pack contents

3 pcs



PROFI

Ord. number: 65 404 394

A = 3 mm B = 75 mm C = 100 mm D = 1.25 mm E = 8 mm

SAW BLADE

SBN 754 R



Use


softwood, structural timber, multiplex, MDF, chipboard, blockboard, wood-fibre boards

Specification

quick, rougher cut

Pack contents

3 pcs

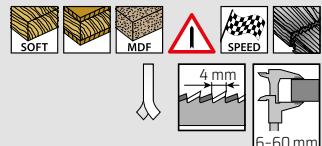

PROFI

Ord. number: 65 404 395

A = 4 mm B = 75 mm C = 100 mm D = 1.25 mm E = 8 mm

SAW BLADE

SBN 753 RC



Use


softwood, structural timber, multiplex, MDF, chipboard, blockboard, wood-fibre boards, plastic

Specification

quick, rougher, curved cut

Pack contents

3 pcs

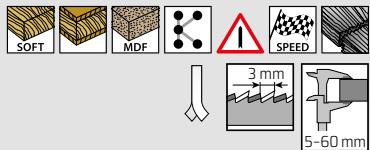

PROFI

Ord. number: 65 404 398

A = 3 mm B = 75 mm C = 100 mm D = 1.25 mm E = 8 mm

SAW BLADE

SBN 1102 MR



Use


softwood, structural timber, plywood, chipboard, blockboard, wood-fibre boards, multiplex, MDF, plastic

Specification

medium rough, straight cut, extra long blade

Pack contents

3 pcs

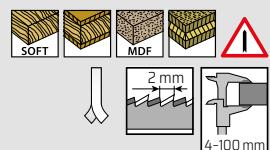

PROFI

Ord. number: 65 404 396

A = 2 mm B = 110 mm C = 132 mm D = 1.25 mm E = 8 mm

SAW BLADE

SBN 2304 MR **TOP**



Use


softwood, thick structural timber, plywood, multiplex, wood-fibre boards, MDF

Specification

precise, medium rough, straight cut, extra long blade. Sharply ground teeth on an alloyed blade enable cuts into wood up to 200 mm thick

Pack contents

2 pcs

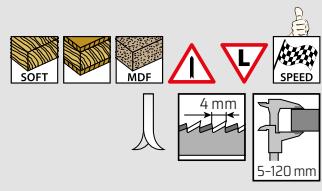

SUPERPROFI

Ord. number: 65 404 397

A = 4 mm B = 230 mm C = 250 mm D = 1.7 mm E = 8 mm

A - tooth pitch, **B** - work length **C** - total length **D** - thickness **E** - width

ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE

SBN 1304 MR



Use

softwood, structural timber, multiplex, chipboard, blockboard, wood-fibre boards, MDF


Specification

quick, medium rough, straight cut, long blade

2 pcs

Ord. number: 65 404 400

A = 4 mm B = 120 mm C = 150 mm D = 1.25 mm E = 8 mm

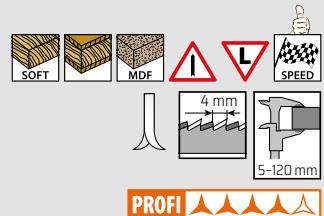

SAW BLADE

SBN 754 MR



Use

softwood, structural timber, multiplex, chipboard, plywood, blockboard, wood-fibre boards, MDF, kitchen tops


Specification

very quick, medium rough, straight cut

3 pcs

Ord. number: 65 404 399

A = 4 mm B = 75 mm C = 100 mm D = 1.25 mm E = 8 mm

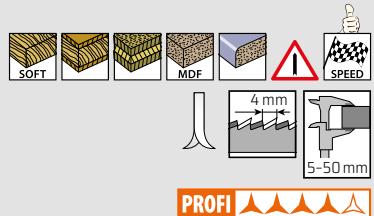

SAW BLADE

SBN 754 MRC



Use

softwood, multiplex, chipboard, blockboard, plywood, wood-fibre boards, MDF

Specification

very quick, medium rough cut, specialised on curves

3 pcs

Ord. number: 65 404 401

A = 4 mm B = 75 mm C = 100 mm D = 1.25 mm E = 8 mm



SAW BLADE

SBN 7525 SF **TOP**



Use

soft and hard wood, locust wood, chipboard, blockboard, wood-fibre boards, MDF, kitchen countertops, laminate, fibreglass, composite material

Specification


precise, clean, straight cut

Pack contents

3 pcs

Ord. number: 65 404 416

A = 2.5 mm B = 75 mm C = 100 mm D = 1.27 mm E = 8 mm

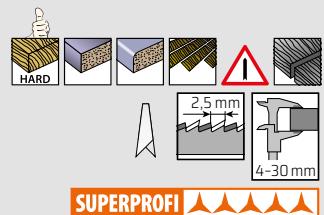

SAW BLADE

SBN 7525 F



Use

softwood, structural timber, multiplex, plywood, MDF, chipboard, blockboard, wood-fibre boards

Specification



very clean, straight cut

Pack contents

3 pcs

Ord. number: 65 404 402

A = 2.5 mm B = 75 mm C = 100 mm D = 1.45 mm E = 8 mm

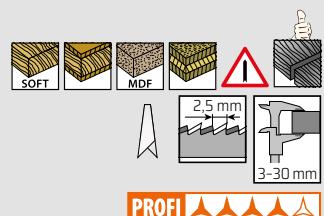

ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE


SBN 11025 F



Use	softwood, structural timber, multiplex, plywood, MDF, chipboard, blockboard, wood-fibre boards
Specification	very clean, straight cut, long blade
Pack contents	3 pcs

Ord. number: 65 404 403

A = 2.5 mm B = 110 mm C = 132 mm D = 1.45 mm E = 8 mm

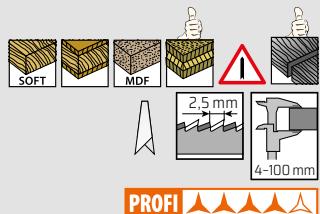

SAW BLADE

SBN 903 F



Use	soft- and hardwood, structural timber, multiplex, plywood, MDF, chipboard, blockboard, wood-fibre boards, plastics
Specification	very clean, straight cut
Pack contents	3 pcs

Ord. number: 65 404 408

A = 3 mm B = 90 mm C = 115 mm D = 1.45 mm E = 8 mm



SAW BLADE


SBN 752 SFC TOP



Use	softwood, laminate, multiplex, chipboard, blockboard, plywood, wood-fibre boards, MDF
Specification	very clean cut without burrs on either side of the material, designed specifically for curves
Pack contents	3 pcs

Ord. number: 65 404 415

A = 2 mm B = 75 mm C = 100 mm D = 2 mm E = 8 mm

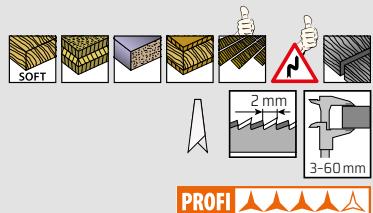

SAW BLADE


SBN 5013 SFC



Use	softwood, plywood, laminated board, laminate, wood-fibre boards
Specification	very thin saw blade for extremely fine and clean cuts, designed specifically for curves
Pack contents	3 pcs


Ord. number: 65 404 410

A = 1.3 mm B = 50 mm C = 75 mm D = 1.25 mm E = 8 mm

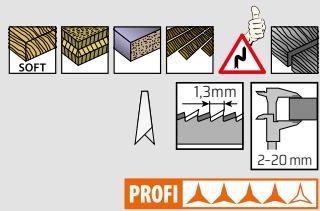

SAW BLADE


SBN 752 SF



Use	softwood, plywood, blockboard, MDF, laminated board, laminate, wood-fibre boards
Specification	precise, clean cut without splintering on either side of the material
Pack contents	3 pcs

Ord. number: 65 404 409

A = 2 mm B = 75 mm C = 100 mm D = 1.45 mm E = 8 mm

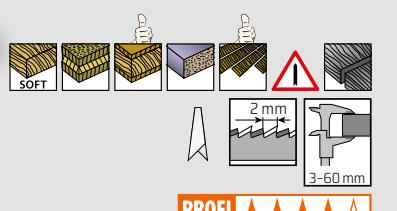


A - tooth pitch, **B** - work length **C** - total length **D** - thickness **E** - width

ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE

SBN 1102 SF

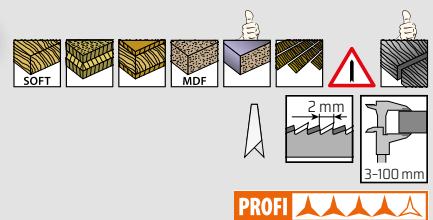


Use	softwood, plywood, blockboard, MDF, laminated board, wood-fibre boards
Specification	chipless, clean cuts on both sides of the material, long blade
Pack contents	3 pcs

Ord. number: 65 404 407

A = 2 mm B = 110 mm C = 132 mm D = 1.45 mm E = 8 mm

SAW BLADE

SBN 752 FP TOP

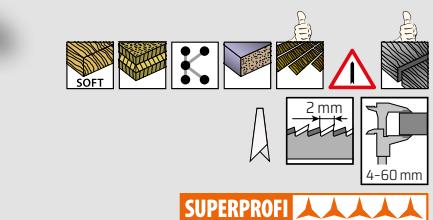


Use	soft- and hardwood, structural timber, multiplex, plywood, MDF, chipboard, blockboard, wood-fibre boards, plastic
Specification	very clean cuts without splinters on either side of the material. The patented perforated saw blade diffuses heat created by friction. The structure of the saw blade is fitted with parallel holes designed to conduct heat while simultaneously improving air flow for better cooling of the saw blade. The neutral geometry of the teeth guides the cut forward and down with every move, while the parallelly-shaped body of the blade ensures a perfectly straight cut.
Pack contents	3 pcs

Ord. number: 65 404 405

A = 2 mm B = 75 mm C = 100 mm D = 1.45 mm E = 8 mm C_v

SAW BLADE

SBN 7525 FP

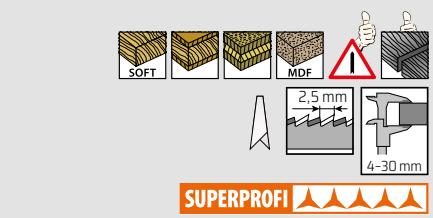


Use	soft- and hardwood, structural timber, multiplex, plywood, MDF, chipboard, blockboard, wood-fibre boards
Specification	very clean cuts without splinters on either side of the material. Patented perforated saw blade diffuses heat created by friction. The structure of the saw blade is fitted with parallel holes designed to conduct heat while simultaneously improving air flow for better cooling of the saw blade. The neutral geometry of the teeth guides the cut forward and down with every move, while the parallelly-shaped body of the blade ensures a perfectly straight cut.
Pack contents	3 pcs

Ord. number: 65 404 404

A = 2.5 mm B = 75 mm C = 100 mm D = 1.45 mm E = 8 mm C_v

SAW BLADE


SBN 7525 SFI

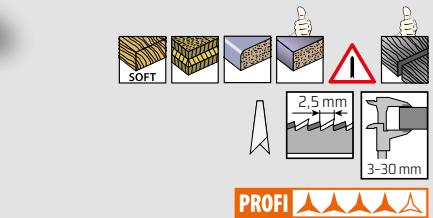

Use	softwood, structural timber, plywood, laminated boards, kitchen tops
Specification	very clean, straight cut without burrs. Saw blade with inverted teeth
Pack contents	3 pcs

Ord. number: 65 404 406

A = 2.5 mm B = 75 mm C = 100 mm D = 1.45 mm E = 8 mm



ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE


SBN 5519 SF



Use	laminated boards, laminate, hard- and softwood, multiplex, plywood
Specification	very clean, straight cut without burrs. Saw blade with inverted teeth
Pack contents	3 pcs

Ord. number: 65 404 417

A = 1.9 mm B = 55 mm C = 80 mm D = 1.27 mm E = 8 mm

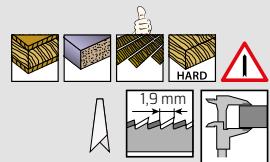

SUPERPROFI

SAW BLADE


SBN 9522 FC TOP



Use	softwood, plywood, multiplex, glued wood, MDF, laminated board, laminate, kitchen top
Specification	special double-sided saw blade for extreme curves; quick and clean cut in materials with a variety of thicknesses
Pack contents	3 pcs

Ord. number: 65 404 413

A = 2.2-3.2 mm B = 95 mm C = 115 mm D = 1.45 mm E = 8 mm

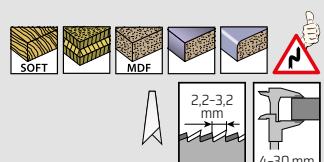

SUPERPROFI

SAW BLADE


SBN 7525 FC



Use	soft- and hardwood, plywood, multiplex, glued wood, MDF, laminated board
Specification	double-sided saw blade for perfect curves, very clean cut
Pack contents	2 pcs

Ord. number: 65 404 414

A = 2.5 mm B = 75 mm C = 100 mm D = 1.45 mm E = 8 mm

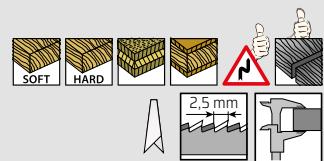

SUPERPROFI

SAW BLADE


SBN 9522 F



Use	softwood, structural timber, plywood, multiplex, glued wood, MDF, laminated board
Specification	universal saw blade for straight and clean cuts in both thick and thin materials
Pack contents	3 pcs

Ord. number: 65 404 412

A = 2.2-3.2 mm B = 95 mm C = 115 mm D = 1.45 mm E = 8 mm

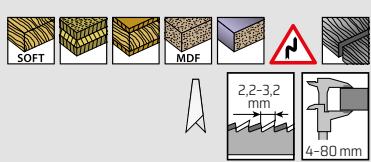

SUPERPROFI

SAW BLADE


SBN 9025 F



Use	softwood, structural timber, plywood, multiplex, glued wood, laminate, MDF, laminated board
Specification	progressive saw blade with three-edged teeth for extra clean cuts in both thick and thin materials
Pack contents	3 pcs

Ord. number: 65 404 411

A = 2.2-3.2 mm B = 90 mm C = 115 mm D = 1.45 mm E = 8 mm

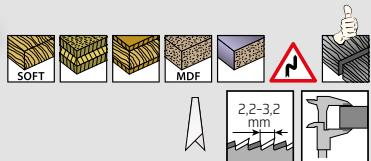

SUPERPROFI


A - tooth pitch, B - work length C - total length D - thickness E - width

ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE

SBN 18014 SF **TOP**

Use	steel sheets, steel pipes and open profiles, stainless steel, non-ferrous metals, reinforced plastics, sandwich-structured composites
Specification	very clean, straight cut, extra long blade
Pack contents	2 pcs

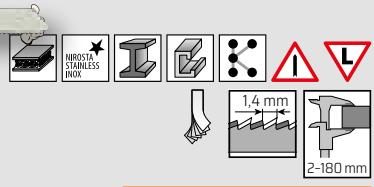

SUPERPROFI


Ord. number: 65 404 421

A = 1.4 mm B = 180 mm C = 200 mm D = 1.27 mm E = 8 mm

SAW BLADE

SBN 11012 SF

Use	steel sheets, steel pipes and open profiles, stainless steel, non-ferrous metals, reinforced plastics, epoxy and sandwich-structured composites
Specification	clean, straight cut, long blade
Pack contents	3 pcs

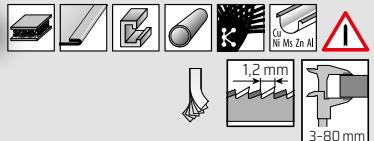

SUPERPROFI


Ord. number: 65 404 419

A = 1.2 mm B = 110 mm C = 132 mm D = 1 mm E = 8 mm

SAW BLADE

SBN 7512 F

Use	steel sheets, steel pipes, stainless steel, non-ferrous metals
Specification	progressive saw blade for quick straight cuts in materials of various thicknesses
Pack contents	3 pcs

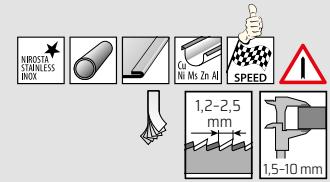

SUPERPROFI

Ord. number: 65 404 420

A = 1.2-2.5 mm B = 75 mm C = 100 mm D = 1 mm E = 8 mm

SAW BLADE

SBN 5012 SF

Use	steel sheets, stainless steel, non-ferrous metals
Specification	clean, straight cuts
Pack contents	3 pcs



SUPERPROFI


Ord. number: 65 404 418

A = 1.2 mm B = 50 mm C = 75 mm D = 1 mm E = 8 mm

SAW BLADE

SBN 11016 F


Use	sandwich-structured composites, stainless steel, steel sheets, steel pipes, non-ferrous metals, reinforced plastics
Specification	variable tooth pitch for all types of metals, straight and very clean cuts
Pack contents	3 pcs

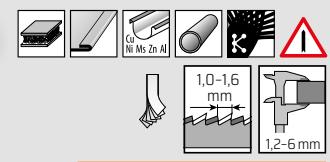

SUPERPROFI

Ord. number: 65 404 423

A = 1.0-1.6 mm B = 110 mm C = 132 mm D = 1 mm E = 8 mm



ACCESSORIES / FOR JIG SAWS - SAW BLADES

SAW BLADE

SBN 11018 MR **TOP**



Use	sandwich-structured composites, soft- and hardwood, structural timber, wood with nails, stainless steel, steel sheets, non-ferrous metals
Specification	flexible and variable saw blade with alternating tooth spacing and guaranteed universal cut for a variety of wooden and metal materials; medium rough, straight cut, long blade
Pack contents	3 pcs

Ord. number: 65 404 422

A = 1,8-2,5 mm B = 110 mm C = 132 mm D = 1,27 mm E = 8 mm




SUPERPROFI

COMBINED SET OF PROFESSIONAL SAW BLADES

SET SBN 5

SUPERPROFI

SBN 5012 SF	steel sheets, stainless steel, non-ferrous metals, clean straight cuts
SBN 7525 F	softwood, structural timber, plywood, MDF, chipboard, blockboard, very clean straight cut
SBN 752 FP	soft- and hardwood, structural timber, plywood, MDF, blockboard, wood-fibre boards, chipless clean cuts
SBN 11018 MR	soft- and hardwood, sandwich-structured composites, wood with nails, stainless steel, steel sheets, non-ferrous metals, medium rough, straight cut, long blade
SBN 9522 FC	softwood, plywood, multiplex, glued wood, MDF, laminate, special double-sided saw blade for extreme curves, quick and clean cuts

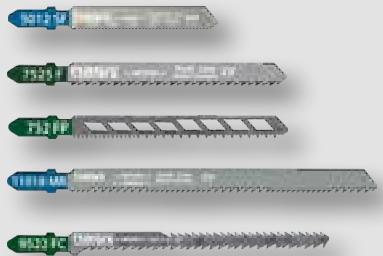


Ord. number: 65 404 426

ACCESSORIES FOR EPL 12-7 BE



Name	Type	Ord. number
Insert against fraying of the material	SG-EPL 12; 5 pcs per pack; for EPL 12-7 BE	65 409 995
Guard against loose splinters	PS-EPL 12 for EPL 12-7 BE	65 404 761
Extraction adapter	OA-EPL 12 for EPL 12-7 BE	65 409 994
Steel base plate insert	SM-EPL 12 for EPL 12-7 BE	65 409 998
Plastic base plate insert	SP-EPL 12 for EPL 12-7 BE	65 409 999



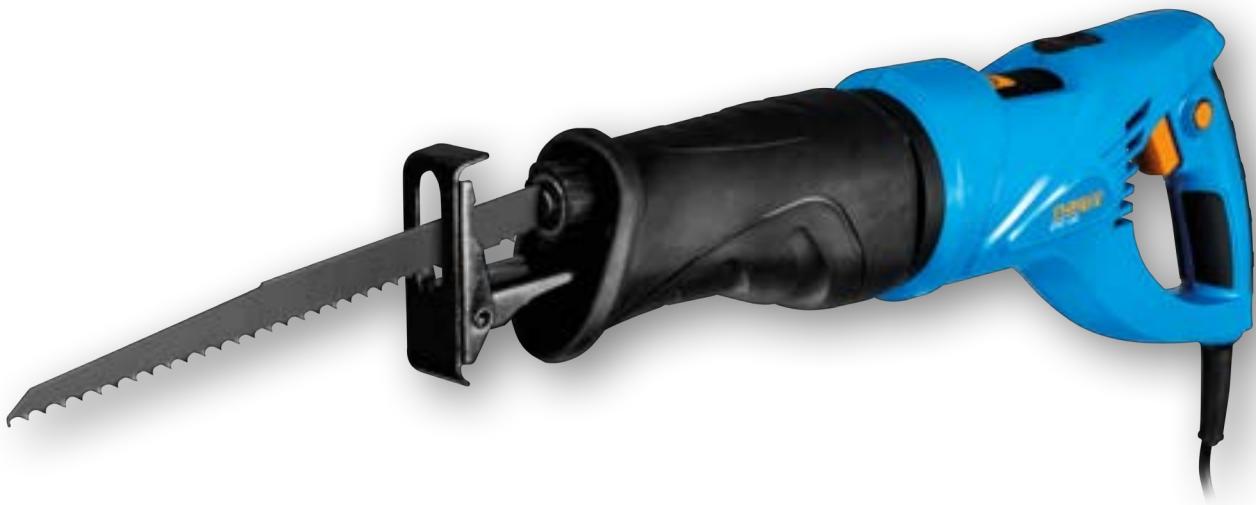

◀ TWO-HANDED SABRE SAW ▶

EPO 150

Rated input power	800 W
Stroke speed	0-2,500 /min
Stroke length	22 mm
Max. cutting depth	
- steel	6 mm
- wood	150 mm
Weight	2.6 kg

DELIVERY INCLUDES

Basic EPO 150 machine (65 406 030), hex key, cardboard box

Ord. number: **65 406 029**

- ▶ Compact design for ease of use without strain
- ▶ Adjustable main handle can be locked in five positions, allowing the machine to be used in any working position
- ▶ FastFix quick-release system on the spindle allows quick and easy changing of the saw blade
- ▶ Speed regulation in the activator switch allows adapting cutting speed to the material
- ▶ Depth of cut of up to 150 mm in wood
- ▶ Rubberised rear handle and front section of the machine – adhesive surface ensures a secure and firm grip in any working position
- ▶ 4 m rubber cable for high flexibility of use

**◀ POWERFUL SABRE SAW ▶****EPO 210**

Rated input power	1,200 W
Stroke speed	0-2,800 /min
Stroke length	28 mm
Max. cutting depth	
- steel	10 mm
- wood	210 mm
Weight	3.6 kg

DELIVERY INCLUDES

Basic EPO 210 machine (65 406 032), cardboard box

Ord. number: 65 406 031

- ▶ Powerful 1,200 W motor provides high cutting power
- ▶ Four pendulum action levels for rapid penetration through material, or for higher accuracy
- ▶ FastFix quick-release lever system allows quick and easy changing of the saw blade
- ▶ Tool-free adjustment of the support into four working positions improves safety and ensures even wear on the saw blade
- ▶ Speed regulation allows for adapting cutting speed to the material
- ▶ Depth of cut of up to 210 mm in wood
- ▶ Rubberised rear handle and front section of the machine - adhesive surface ensures a secure and firm grip in any working position
- ▶ Autonomous LED work light facilitates use in poor lighting conditions
- ▶ 4 m rubber cable for high flexibility of use

ACCESSORIES / FOR SABRE SAWS - RBN SAW BLADES

SAW BLADE

RBN 1342 R



Use	wood, glued wood, MDF, plywood, kitchen countertops, plastic
Specification	quick, rougher cut, ability to cut curves
Material	CrV
Pack contents	2 pcs

Ord. number: 65 405 879

A = 4.2 mm B = 130 mm C = 150 mm D = 1.20 mm E = 19 mm

PROFI



6-100 mm

SAW BLADE

RBN 2142 R



Use	wood and/with nails, demolition, reinforced plastic, MDF
Specification	quick, rougher cut, long blade
Material	Bi-Metal (8% Cobalt)
Pack contents	2 pcs

Ord. number: 65 405 880

A = 4.2 mm B = 210 mm C = 230 mm D = 1.27 mm E = 19 mm

SUPERPROFI



6-175 mm

SAW BLADE

RBN 1818 MR VARIO



Use	wood and/with nails, steel pipe, closed profile, steel, pallet
Specification	precise, straight cut, medium rough, variable pitch, precise angle
Material	Bi-Metal (8% Cobalt)
Pack contents	2 pcs

Ord. number: 65 405 881

A = 1.8-2.5 mm B = 180 mm C = 200 mm D = 1.27 mm E = 19 mm

SUPERPROFI



3-12 mm

SAW BLADE

RBN 2118 MR VARIO



Use	wood and/with nails, steel pipe, reinforced plastic, steel, pallet, non-ferrous metals/aluminium
Specification	precise, straight cut, medium rough, variable pitch, long blade
Material	Bi-Metal (8% Cobalt)
Pack contents	2 pcs

Ord. number: 65 405 882

A = 1.8-2.5 mm B = 210 mm C = 230 mm D = 0.90 mm E = 19 mm

SUPERPROFI



3-12 mm

SAW BLADE

RBN 1314 F



Use	stainless steel, steel, sheet steel, steel pipe, open profile, closed profile
Specification	precise and very clean cuts
Material	Bi-Metal (8% Cobalt)
Pack contents	2 pcs

Ord. number: 65 405 883

A = 1.4 mm B = 130 mm C = 150 mm D = 0.90 mm E = 19 mm

SUPERPROFI



1.5-4 mm

A - tooth pitch, B - work length C - total length D - thickness E - width

ACCESSORIES / FOR SABRE SAWS - RBN SAW BLADES

SAW BLADE

RBN 1318 UNI



Use	wood and/with nails, MDF, steel plate, steel pipe, closed profile
Specification	precise cut in metal or wood, double-sided blade
Material	Tri-Metal (8% Cobalt)
Pack contents	2 pcs

Ord. number: 65 405 878

A = 1.8 mm B = 130 mm C = 150 mm D = 0.90 mm E = 19 mm F = 1.4 mm

SUPERPROFI



15-8 mm

SAW BLADE

RBN 25413 R



Use	aerated concrete, brick
Specification	tungsten carbide teeth, rough cut
Material	HCS
Pack contents	1 pcs

Ord. number: 65 406 311

A = 13 mm B = 254 mm C = 325 mm D = 2.5 mm E = 50 mm

SUPERPROFI



<200 mm

SAW BLADE

RBN 19525 MR VARIO



Use	pallets, wood and/with nails
Specification	medium rough cut, variable pitch
Material	Bi-Metal (8% Cobalt)
Pack contents	2 pcs

Ord. number: 65 406 312

A = 1.8-2.5 mm B = 195 mm C = 215 mm D = 0.90 mm E = 19 mm

SUPERPROFI



30-100 mm

SAW BLADE

RBN 2165 R



Use	soft wood/structural timber, branches, firewood
Specification	quick rough cut, variable pitch
Material	CrV
Pack contents	2 pcs

Ord. number: 65 406 313

A = 5-6.5 mm B = 210 mm C = 240 mm D = 1.20 mm E = 19 mm



PROFI



15-190 mm

Usage specifications

	Soft wood Structural timber		Laminated board		Steel pipe		Non-ferrous metals Aluminium		Thickness of material		Firewood
	Wood and/with nails		MDF		Open profile		Demolition work		Aerated concrete		Quick cut
	Multiplex Glued wood		Curved cut		Plastic		Closed profile		Stonework/brick/ concrete blocks		
	Plywood		Steel		Reinforced plastic Epoxyde		Pallet		Tungsten carbide teeth		
	Kitchen countertops		Steel sheet		Stainless steel		Precise angle		Branches		

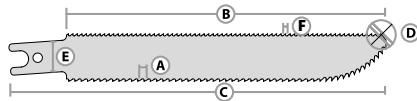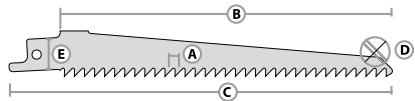



HAND-HELD CIRCULAR SAW ▶

EPK 18

Rated power input	1 400 W
Idle speed	5 000 rpm
Cutting at angle	0°-45°
Cut depth	
at 90° angle	0-60 mm
at 45° angle	0-45 mm
Saw blade size	185 x 20/2,0 mm
Weight	4.5 kg

DELIVERY INCLUDES

Basic EPK 18 machine (65 406 043),
185 x 2.0/1.4 x 20 Z 24T saw blade (65 406 044), mounting
flange (65 406 305), carrier flange (65 406 306), wrench
(65 406 308), horizontal stop (65 406 307), extraction adapter
(65 406 309), cardboard box

Ord. number: **65 406 042**

- Modern and practical design focused on easy and comfortable control
- Powerful 1,400 W motor maintains the desired speed even at high load
- Stable guide shoe made of aluminium alloy for precise seating of the saw on the cut material
- Robust aluminium-alloy body of the gearbox and of the guards to increase work safety
- Saw tilting allows cutting at 0° to 45° angle
- Can be connected to a dust extractor for increased comfort and cleanliness (e.g. when working indoors)
- Composite motor case with ergonomic rubberised handles facilitates guiding the machine
- Auto-disconnecting carbon brushes prevent rotor damage
- Removable guard for quick and easy brush replacement
- 4 m rubber cable for high flexibility of use
- Thin saw blade reduces load on the machine and increases cutting efficiency



CIRCULAR SAW BLADES FOR WOOD / 185 x 1.6/1.0 x 20

◀ CIRCULAR SAW BLADE ▶


185 x 1.6/1.0 x 20 Z24T



Use	multiplex, soft wood, hard wood, MDF
Specifications	quick, rougher cut with burr
Outer diameter	185 mm
Tooth width/body thickness	1.6/1.0 mm
Tooth material	tungsten carbide
Number of teeth	24
Type	Alternating teeth

Ord. number: 65 405 831

SUPERPROFI



◀ CIRCULAR SAW BLADE ▶


185 x 1.6/1.0 x 20 Z36T



Use	multiplex, soft wood, hard wood, MDF, plywood, laminated board
Specifications	smooth cut
Outer diameter	185 mm
Tooth width/body thickness	1.6/1.0 mm
Tooth material	tungsten carbide
Number of teeth	36
Type	Alternating teeth

Ord. number: 65 405 832

SUPERPROFI



◀ CIRCULAR SAW BLADE ▶


185 x 1.6/1.0 x 20 Z48T



Use	multiplex, soft wood, hard wood, MDF, plywood, kitchen countertops
Specifications	very smooth cut
Outer diameter	185 mm
Tooth width/body thickness	1.6/1.0 mm
Tooth material	tungsten carbide
Number of teeth	48
Type	Alternating teeth

Ord. number: 65 405 833

SUPERPROFI



CIRCULAR SAW BLADES FOR WOOD / 185 x 2.0/1.4 x 20

CIRCULAR SAW BLADE ▶

185 x 2.0/1.4 x 20 Z24T



Use	multiplex, soft wood, hard wood, MDF
Specifications	quick, rougher cut with burr
Outer diameter	185 mm
Tooth width/body thickness	2.0/1.4 mm
Tooth material	tungsten carbide
Number of teeth	24
Type	Alternating teeth

Ord. number: 65 406 044

SUPERPROFI



CIRCULAR SAW BLADE ▶


185 x 2.0/1.4 x 20 Z36T



Use	multiplex, soft wood, hard wood, MDF, plywood, laminated board
Specifications	smooth cut
Outer diameter	185 mm
Tooth width/body thickness	2.0/1.4 mm
Tooth material	tungsten carbide
Number of teeth	36
Type	Alternating teeth

Ord. number: 65 406 046

SUPERPROFI



CIRCULAR SAW BLADE ▶


185 x 2.0/1.4 x 20 Z48T



Use	multiplex, soft wood, hard wood, MDF, plywood, kitchen countertops
Specifications	very smooth cut
Outer diameter	185 mm
Tooth width/body thickness	2.0/1.4 mm
Tooth material	tungsten carbide
Number of teeth	48
Type	Alternating teeth

Ord. number: 65 406 047

SUPERPROFI



Usage specifications ▶

	Soft wood Structural timber		Laminated board		Open profile		Demolition work		Cut with fraying
	Hard wood		MDF		Laminate		Closed profile		Very smooth cut
	Wood and/with nails		Curved cut		Plastic		Pallet		Cordless circular saw
	Multiplex Glued wood		Steel		Reinforced plastic Epoxide		Precise angle		Circular saw
	Plywood		Steel sheet		Stainless steel		Thickness of material		
	Kitchen countertops		Steel pipe		Non-ferrous metals Aluminium				



Oil tank

The oil tank has a capacity of 210 ml and is closed off by an ergonomic cap with a safety cord to protect against misplacement. Checking oil is made easy using a simple oil gauge located on the side of the saw.



SoftGrip handle

Rear handle with a special anti-slip SoftGrip layer for ideal and comfortable grip during extended use.



Flexible power cord fixation system

The chainsaw is fitted with a simple hook on the back of the handle to loop or release the extension cord. The cord is then protected against being unplugged accidentally.



Tool-free chain tensioning

Simple chain tensioning using a manual wing clamping nut and a chain tensioning wheel.

Reinforced mounting of the gearbox

Sturdy fitting of the gearbox improves torsional rigidity of the machine and extends the life of the entire transmission mechanism.



Metal transmission and rundown brake

All-steel motor gearbox for effective transmission of force and long life.

Rundown brake which immediately stops the rotation of the chain to prevent injury to the user.

Chain safety brake

In the event of kickback, the hand on the front handle activates the brake which immediately stops the chain. The mechanical brake thus ensures maximum safety in all situations.



Universal saw chain and guide bar

The chain with round teeth is built to reduce the risk of kickback, minimise vibrations, and provide higher cutting comfort, a cleaner cut, and ease-of-use during sharpening.

Guide bar with laminated body and small nose radius and rotary sprocket helps reduce kickback during saw operation.

Powerful and efficient motor

Compact 2,400 W motor with **SOFTSTART** control electronics for smooth run-up to work speed.



◀ CHAINSAW ▶

EPR 350-24

Rated input power	2,400 W
Guide bar length	350 mm
Chain speed	14 m/s
Saw chain	Narex SC 52DL 3/8" LP 1.3
Chain pitch	3/8"
Chain gauge	1.3 mm
Chain brake	mechanical
Rundown brake	mechanical
Chain lubrication	AUTO
Oil tank volume	210 ml
Chain tensioning system	FastFix
Weight without guide bar and chain	4.5 kg

DELIVERY INCLUDES

Basic EPR 350-24 machine (65 406 051), guide bar (65 406 329), chain (65 406 333), bar scabbard (65 404 819), cardboard box

Ord. number: **65 406 050**

- ▶ Powerful 2,400 W motor for quick and efficient cutting in both soft and hard wood
- ▶ Restriction of start-up current **SOFTSTART** – for gradual run-up to work speed
- ▶ Rundown brake and kickback brake with function for immediate stopping of the saw chain
- ▶ Simple and quick FastFix tool-free chain tensioning thanks to a precise tensioning wheel and large wing nut
- ▶ Solid toothed stop for safely propping the saw against the cut material
- ▶ Rubberised, ergonomic rear handle comfortably fits the hand
- ▶ Arched side handle precisely aligned with the motor case to serve as crucial support for the saw during setting and cleaning
- ▶ Automatic chain lubrication extends the life of the guide bar and the chain



◀ CHAINSAW ▶

EPR 400-24

Rated input power	2,400 W
Guide bar length	400 mm
Chain speed	14 m/s
Saw chain	Narex SC 57DL 3/8" LP 1.3
Chain pitch	3/8"
Chain gauge	1.3 mm
Chain brake	mechanical
Rundown brake	mechanical
Chain lubrication	AUTO
Oil tank volume	210 ml
Chain tensioning system	FastFix
Weight without guide bar and chain	4.5 kg

DELIVERY INCLUDES

Basic EPR 400-24 machine (65 406 053), guide bar (65 406 330), chain (65 406 334), bar scabbard (65 404 819), cardboard box

Ord. number: 65 406 052

- ▶ Powerful 2,400 W motor for quick and efficient cutting in both soft and hard wood
- ▶ Restriction of start-up current **SOFTSTART** – for gradual run-up to work speed
- ▶ Rundown brake and kickback brake with function for immediate stopping of the saw chain
- ▶ Simple and quick FastFix tool-free chain tensioning thanks to a precise tensioning wheel and large wing nut
- ▶ Solid toothed stop for safely propping the saw against the cut material
- ▶ Rubberised, ergonomic rear handle comfortably fits the hand
- ▶ Arched side handle precisely aligned with the motor case to serve as crucial support for the saw during setting and cleaning
- ▶ Automatic chain lubrication extends the life of the guide bar and the chain

ACCESSORIES / FOR CHAIN SAWS

► ACCESSORIES FOR CHAIN SAWS ►



SET SK4 - saw chain sharpening kit

Round file with 4 mm diameter and wooden handle. File guide to maintain correct sharpening angle.

Flat file with a wooden handle, for upkeep of the depth stop. Gauge for upkeep of the depth stop + guide bar groove cleaner

65 406 058

FK D4 - round file

65 406 056

HF D4 - handle

65 406 057

Wooden file handle

Biological oil for total-loss lubrication of the chain and bar

65 403 576

Chainsaw bag

65 405 487

CHB 900



- Guide bar with laminated body and guide sprocket
- Higher resistance - lower weight - outstanding performance



- Chains with round teeth bring higher cutting comfort, a cleaner cut, and slower dulling of the edge

NAREX guide bars and saw chains are suitable for all NAREX electric chainsaw models according to the conversion table below:

Saw chain							Guide bar			EPR XX-20	EPR XX-24 A	EPR XX-25	EPR XX-25 HS	EPR XX-23	EPR XXX-24
Ord. number	Type					Ord. number	Type								
65 406 331	SC 45DL 3/8" LP 1.3	45	300 mm	3/8"	1.3 mm	65 406 328	GB-EPR 30	1.3 mm	✓	✓	✓	X	X	✓	
65 406 332	SC 52DL 3/8" LP 1.3	52	350 mm	3/8"	1.3 mm	65 406 329	GB-EPR 35	1.3 mm	✓	✓	✓	X	X	✓	
65 406 333	SC 53DL 3/8" LP 1.3	53	350 mm	3/8"	1.3 mm	65 406 329	GB-EPR 35	1.3 mm	✓	✓	✓	✓	✓	✓	
65 406 334	SC 57DL 3/8" LP 1.3	57	400 mm	3/8"	1.3 mm	65 406 330	GB-EPR 40	1.3 mm	✓	✓	✓	X	✓	✓	
65 406 335	SC 58DL 3/8" LP 1.3	58	400 mm	3/8"	1.3 mm	65 406 330	GB-EPR 40	1.3 mm	✓	✓	✓	✓	X	✓	





◀ VACUUM CLEANERS ▶

- NAREX universal vacuum cleaners are suitable for dry and wet vacuuming. Easily handle common construction and workshop dirt which they collect into a filter bag or directly into the vacuum cleaner's container.
- Thanks to their high and uncompromising suction power, they can handle dirt up to sizes equal to the interior diameter of the accessories. High-quality filtration system ensures efficient filtration of the outgoing air.
- Vacuum cleaners equipped with the Press & Clean system offer efficient and easy cleaning of a dust-clogged filter. After manual application of the Press & Clean system, the suction power and efficiency of the vacuum cleaner is restored back to optimal values.
- Automatic filter cleaning system Auto Clean ensures constant high suction power without the need for the operator to intervene. The cleaning cycle is performed repeatedly every 30 seconds and the user can thus continue their work without interruption. Suction efficiency remains constantly high.
- Thanks to robust design and the use of high-quality materials, the vacuum cleaners can handle even high load and rough handling. Rounded shapes without unpleasant sharp edges and corners enable comfortable handling. The compact design of the vacuum cleaners makes transport much easier.



◀ **VERSATILE VACUUM CLEANER ▶**

VYS 21-01

Rated power input	1 000 W
Max. air amount	3 600 l/min
Suction power	21 000 Pa
Container volume	20 l
Weight	7.5 kg

DELIVERY INCLUDES

- 1x suction hose, diameter 32 mm, length 3.5 m (65 403 725)
- 2x aluminium extension pipe (00 614 654)
- 1x universal nozzle (00 635 262)
- 1x crevice nozzle, length 200 mm (00 647 545)
- 1x brush nozzle, dia. 75 (00 647 546)
- 1x upholstery nozzle (00 647 547)
- 1x hook on cable (65 403 877)
- 1x textile filter bag (65 900 596)
- 1x PET filter cartridge (00 763 290)
- cardboard box

Ord. number: 65 403 607

- ▶ Dry and wet vacuum cleaning
- ▶ Vacuum cleaning of standard construction and workshop dirt (dust, wood shavings and splinters, metal shavings, glass shards, etc.) into a filter bag or directly into a container
- ▶ Press&Clean system for quickly cleaning a clogged filter cartridge during use
- ▶ Polyethylene filter cartridge repels dust and can be washed with water
- ▶ Waste air outlet with option for connecting a suction hose for blowing dirt out of inaccessible places
- ▶ Light and compact body for easy transport

VACUUM CLEANER / COMPACT AND POWERFUL FOR INSTALLATION WORK



► COMPACT VACUUM CLEANER ►

VYS 25-21

Rated power input	1 200 W
Max. air amount	3 700 l/min
Suction power	23 500 Pa
Container volume	25 l
Max. power input of connected device	2 400 W
Weight	9 kg

DELIVERY INCLUDES

- 1x suction hose, diameter 32 mm, length 3.5 m (65 403 725)
- 2x aluminium extension pipe (00 614 654)
- 1x universal nozzle (00 635 262)
- 1x crevice nozzle, length 200 mm (00 647 545)
- 1x brush nozzle, dia. 75 (00 647 546)
- 1x upholstery nozzle (00 647 547)
- 1x adapter for connecting power tools (65 403 726)
- 1x compartment for tools (65 403 727)
- 1x cable sling (65 900 397)
- 1x textile filter bag (65 900 596)
- 1x PET filter cartridge (00 763 290)
- cardboard box

Ord. number: **65 403 609**

- Dry and wet vacuum cleaning
- Removal of standard construction and workshop dirt into a bag or directly into a container
- Press&Clean system for quickly cleaning the filter cartridge during use
- Polyethylene filter cartridge repels dust and can be washed with water
- Electronic suction power regulation
- Option for connecting vacuum power tools
- Waste air outlet with an option for connecting a suction hose for blowing dirt out of inaccessible places
- Built-in socket and automatic system with run-up and run-down delay
- Compact body with wheels for simple transport machine for increased load during industrial use



INDUSTRIAL VACUUM CLEANER ▶

VYS 33-71 L

Rated power input	1250 W
Max. air amount	4 500 l/min
Negative pressure	25 000 Pa
Container volume	30 l
Dust extraction class	L
Max. power input of connected device	2 400 W
Weight	12 kg

DELIVERY INCLUDES

- 1x suction hose, diameter 32 mm, length 3.5 m (65 403 725)
- 2x aluminium extension pipe (00 614 654)
- 1x universal nozzle (00 635 262)
- 1x crevice nozzle, length 200 mm (00 647 545)
- 1x brush nozzle, dia. 75 (00 647 546)
- 1x adapter for connecting power tools (65 403 726)
- 1x hose hook (65 900 669)
- 1x textile filter bag (65 900 692)
- 1x flat PET filter (65 900 690)
- cardboard box

Ord. number: 65 404 591

- ▶ Option for turning the automatic filter cleaning system on/off
- ▶ Remove dry and wet construction and workshop waste into a bag or directly into a container
- ▶ Washable PET filter cartridge with non-adhesive finish
- ▶ Replaceable secondary filter for the motor's air cooling
- ▶ Built-in socket for power tools
- ▶ Electronic suction power regulation
- ▶ Large wheels for easy handling, front wheels fitted with a brake
- ▶ Option for connecting antistatic accessories
- ▶ Auxiliary holders for easily storing accessories

VACUUM CLEANERS / ADVANTAGES



DUST-FREE FILTER REPLACEMENT

The filter is now fitted entirely outside the dust container. Changing and cleaning the filter no longer requires the motor section of the vacuum cleaner to be removed from the container. All the dust remains inside the container. The problem of finding a place to put the filter when emptying the container is also eliminated because the filter stays in the motor section of the vacuum cleaner.



MAXIMUM MOTOR PROTECTION

Air used to cool the motor is drawn in through a filter. The input filter is removable and can be easily cleaned. Various filters with different degrees of efficiency can be used for different environments.



EASY HANDLING

All four bottom edges of the container have reinforced gripping surfaces, making it easy to pick up and empty the container at any time.



VARIABILITY

The vacuum cleaner boasts a sophisticated system for storing and attaching common accessories. The machine with all its accessories takes up less space – but all the components remain quickly at hand.



SAFE AND STABLE

Thanks to the brake on the front wheels, you could even use your vacuum cleaner on a slanted surface or in places where the vacuum cleaner might otherwise tip over.



MANOEUVRABILITY AND STABILITY ON ANY SURFACE

The vacuum cleaner's robust wheels make handling even on rough floorings possible.



SEVEN FUNCTIONS IN ONE PLACE

FRONT CONTROL PANEL

- A** Turned off, the socket acts as an extension cable
- B** Turned on with automatic filter cleaning
- C** Turned on without automatic filter cleaning
- D** Switch on via a connected tool with automatic filter cleaning
- E** Switch on via a connected tool without automatic filter cleaning
- F** Smooth suction power control
- G** Socket for connecting power tools



STORAGE MADE EASY

FRONT CONTROL PANEL

- 1** 2x integrated hose clip (1x in VYS 33-21 L)
- 2** 2x fitting for storing nozzles
- 3** 4x lug for tightening strap
- 4** Integrated cable hanger



► SUCTION HOSES ►

NAME	TECHNICAL PARAMETERS	FOR TYPE	ORD. NUMBER
Adapter	dia. 32 mm for connecting power tools	VYS 18, VYS 21-01, VYS 30-21, VYS 30-71 AC	00 648 302
Adapter SR	dia. 32 mm for connecting power tools	VYS 21-01, VYS 25-21, VYS 33-21 L, VYS 33-71 L	65 403 726
Adapter SR-N	dia. 32 mm for connecting power tools	VYS 21-01, VYS 25-21, VYS 33-21 L, VYS 33-71 L	65 404 429
Adapter AS	dia. 32 mm for connecting power tools, antistatic	VYS 30-21, VYS 30-71 AC, VYS 33-21 L, VYS 33-71 L	65 900 595
Pipe	dia. 36 mm, plastic, curved, with suction power regulation	VYS 18, VYS 20-01, VYS 30-21, VYS 30-71 AC	00 630 637
Pipe AS	dia. 36 mm, metal, curved, antistatic	VYS 30-21, VYS 30-71 AC, VYS 33-21 L, VYS 33-71 L	65 900 593
Extension pipe	dia. 36 mm, plastic	all types	00 647 543
Extension pipe	dia. 36 mm, aluminium	all types	00 614 654
Extension pipe AS	dia. 36 mm x 350 mm, antistatic, set of 3 pcs	all types	65 900 675

► NOZZLES ►

NAME	TECHNICAL PARAMETERS	FOR TYPE	ORD. NUMBER
Floor nozzle	dia. 36 mm, width 270 mm, plastic	all types	00 635 262
Universal nozzle	dia. 36 mm, width 270 mm, plastic, switchable	all types	00 764 388
Upholstery nozzle	dia. 36 mm, width 120 mm, plastic	all types	00 647 547
Brush nozzle	dia. 36 mm, width 70 mm, plastic, oval	all types	00 647 546
Crevice nozzle	dia. 36 mm, length 200 mm, plastic	all types	00 647 545
Crevice nozzle	dia. 36 mm, length 300 mm, plastic	all types	00 630 641

► ADAPTERS AND PIPES ►

NAME	TECHNICAL PARAMETERS	FOR TYPE	ORD. NUMBER
Suction hose SR	dia. 32 mm x 3.5 m, with pipe	VYS 21-01, VYS 25-21, VYS 33-21 L, VYS 33-71 L	65 403 725
Suction hose AS	dia. 32 mm x 4.0 m, antistatic	VYS 30-21, VYS 30-71 AC, VYS 33-21 L, VYS 33-71 L	65 900 594

FILTERS AND FILTER BAGS



NAME	TECHNICAL PARAMETERS	FOR TYPE	ORD. NUMBER
Filter bag	paper, 5 pcs	VYS 18	00 630 828
Filter bag	textile, 5 pcs	VYS 20-01, VYS 21-01, VYS 25-21	65 900 596
Filter bag	textile, 5 pcs	VYS 30-21, VYS 30-71 AC	00 763 288
Filter bag	textile, 5 pcs	VYS 33-21 L, VYS 33-71 L	65 900 692
Dust bag	5 pcs	VYS 30-21, VYS 30-71 AC	00 763 289
Filter cartridge	PET	VYS 18, VYS 20-01, VYS 21-01, VYS 25-21, VYS 30-21	00 763 290
Filter cartridge, flat	PET, 2 pcs	VYS 30-71 AC	00 765 492
Filter cartridge, flat	PET, non-adhesive surface	VYS 33-21 L, VYS 33-71 L	65 900 690
Motor air-cooling filter	PET	VYS 33-21 L, VYS 33-71 L	65 900 688

OTHER ACCESSORIES



NAME	TECHNICAL PARAMETERS	FOR TYPE	ORD. NUMBER
Compartment for tools	ToolBox	VYS 25-21	65 403 727
Adapter SYS	For attaching a systainer	VYS 33-21 L, VYS 33-71 L	65 900 642
Rubber strap	For fastening accessories, set of 2 pcs	VYS 33-21 L, VYS 33-71 L	65 900 644
Exhaust adapter	For attaching a hose to the vacuum cleaner's exhaust	VYS 33-21 L, VYS 33-71 L	65 900 686
Handle	For easier handling of the vacuum cleaner	VYS 33-21 L, VYS 33-71 L	65 900 643



◀ UNIVERSAL STIRRER ▶

- ▶ For perfect and fast mixing of a wide range of building materials: paints, coatings, spatulas, sealants, adhesives, plasters, mortars, concretes.
- ▶ Powerful motor combined with robust all-metal gearbox.
- ▶ The speed range is very versatile and suits mixing at all consistencies.
- ▶ The on/off switch with de-lock button is ergonomic and contributes to work safety.
- ▶ The solid rubber casing of the handles fits comfortably in the hand and allows the machine to be safely put down or leaned on.
- ▶ 6 m long cable increases the operating range of the mixer on the construction site, the rubber cable sheath does not lose its properties even at low temperatures.
- ▶ For working in a natural, upright position, the paddle can be assembled into two working lengths to adapt the mixer to the height of the operator or to the specific conditions on the site.
- ▶ Removable side covers make it easy to change carbons.
- ▶ Maximum recommended mixing volume: 70 l.



◀ UNIVERSAL STIRRER ▶

EMX 1600

Rated input power	1,600 W
No-load speed	0-700 rpm
Tool fastening	M14
Max. paddle Ø	140 mm
Max. paddle length	575/625 mm
Max. volume of stirred material	70 l
Fastening neck Ø	43 mm
Length of movable power cable	6 m
Weight without paddle	3,8 kg

DELIVERY INCLUDES

Základní stroj EMX 1600 (65 406 435), stranový klíč 19, stranový klíč 22, koš metly 140 mm, upínací trn metly 370 mm, upínací trn metly 420 mm

Ord. number: 65 406 434

- ▶ Powerful motor combined with robust all-metal gearbox provide high torque even when mixing viscous or tough materials
- ▶ Short single-speed design with handles in the machine's centre of gravity makes it very compact, stiffer, lighter, perfectly balanced and manoeuvrable
- ▶ The speed range is very versatile and suits mixing at all consistencies
- ▶ Controls, placed parallel to the grip areas, allow for quick, on-the-fly speed adjustments
- ▶ Smooth speed regulation through a rotary selector switch prevents the stirred material from splashing and splattering
- ▶ The on/off switch with de-lock button is ergonomic and contributes to work safety
- ▶ The sophisticated handle design allows a wide grip, facilitates the guidance of the agitator and significantly reduces the effort during prolonged operation
- ▶ The solid rubber casing of the handles fits comfortably in the hand and allows the machine to be safely put down or leaned on
- ▶ 6 m long cable increases the operating range of the mixer on the construction site, the rubber cable sheath does not lose its properties even at low temperatures
- ▶ Removable side covers make it easy to change carbons
- ▶ Maximum recommended mixing volume: 70 l



◀ LIGHTING EQUIPMENT ▶

- ▶ Boasting high performance, reliability, and elegant design, our Narex lamps use the latest technology of COB and SMD LED chips and are powered by a rechargeable Li-Ion accumulator.
- ▶ This new technology ensures low power consumption, high luminous intensity, and long life, while at the same time being highly eco-friendly.
- ▶ The rechargeable lamps are designed to serve as a reliable light source for all types of work activities such as assembly work or rescue operations, as well as for leisure and outdoor activities.
- ▶ Our wide assortment of products offers various lights with various levels of sophisticated features, from vertical or horizontal adjustment of the light beam, to adjustable luminous flux, to the ability to affix the light to a surface using built-in magnets or hang it on integrated hooks.
- ▶ Our flexible Narex lamps and torches are ideal for indoor and outdoor use and feature high mechanical impact resistance (IK 07; IK 09) and protection against spraying water (IP 54; IP65).
- ▶ The torches are recharged via a USB cable, which allows them to be recharged not only with an AC/DC adapter, but also from a power bank. The lamps and floodlights come with their own type of charging adapter and cable.



◀ WORK LIGHT WITH LIGHT INTENSITY REGULATION ▶ FL 700 SLIM

Supply voltage	3.7 V
Accumulator capacity	2,600 mAh Li-Ion (9.62 Wh)
Luminous flux Battery runtime	1. Spotlight: 1 W 120 lm/9 h 2. Main light: 7 W min. 70 lm/16 h max. 700 lm/2 h
Light intensity regulation	
LED type	SMD LED + COB LED
LED colour temperature	6,500 K
Adjustable angle	180°
Supply voltage / current	5 V - 1 A (USB A - USB C)
LED indicator	* charging ● full
Charge time	4 h
Weight	0.37 kg
Dimensions	220.5 x 66.5 x 46 mm (folded) 397 x 66.5 x 46 mm (unfolded)
Enclosure rating	IP54; IK07

DELIVERY INCLUDES

USB C power cable (NK USB C 65 405 753),
cardboard box

Ord. number: **65 406 061**

- Combines slim design with multi-axis rotation and tilting to point the light exactly where needed
- The power of the main light can be regulated between 70 lm and 700 lm to reach optimum luminous flux and runtime
- A powerful built-in magnet and hook provide great flexibility in where the light is placed
- The light is protected against ingress of dust or spraying water thanks to its IP54 enclosure rating, and is rated IK07 for impact resistance
- Ergonomic anti-slip handle for comfortable holding even during long-term use
- Integrated charge indicator displays the current state of charge of the battery, which can be easily recharged using the enclosed USB A - USB C charging cable



RECHARGEABLE LAMP

FL 1000 MULTI

Supply voltage	3.7 V
Accumulator capacity	3,350 mAh Li-Ion (12.39 Wh)
Luminous flux	1. Spotlight: 4 W
Battery runtime	200 lm/7 h
	2. Main light: 10 W
	250 lm/8 h
	500 lm/4 h
	1,000 lm/2 h
LED type	SMD LED + COB LED
LED colour temperature	6,500 K
Adjustable angle	180°
Supply voltage / current	5 V - 1 A (USB A - USB C)
LED indicator	* charging ● full
Charge time	4 h
Weight	0.38 kg
Dimensions	260 x 53 x 39.3 mm
Enclosure rating	IP65; IK09

DELIVERY INCLUDES

USB C power cable (NK USB C 65 405 753),
cardboard box

Ord. number: 65 406 062

- Versatile work light with three luminous flux settings on the main light (250 / 500 / 1,000 lm) and a 200 lm spotlight
- The light offers high flexibility and adjustability thanks to its 180° rotary base
- Cutting-edge high-performance SMD+COB LED technology ensures high luminous intensity and long life
- Rated IP65 for protection against dust and water ingress and IK09 for impact resistance
- The multi-functional light includes two integrated hooks for hanging on non-metal objects and three magnets for mounting onto metal surfaces
- Integrated charging indicator displays the state of charge of the built-in battery, which can be recharged from a socket using a USB cable via an adapter, or from other compatible devices with a USB port using the enclosed USB A - USB C cable



RECHARGEABLE HEAD LAMP

HL 400 SENSOR

Supply voltage	3.7 V
Accumulator capacity	1,500 mAh Li-Polymer (5.55 Wh)
Luminous flux	1. Spotlight: 2 W
Battery runtime	200 lm/6 h 2. Main light: 4 W 20 lm/35 h 200 lm/8 h 400 lm/4 h
Flexible motion sensor	✓
LED type	SMD LED
LED colour temperature	6,500 K
Adjustable angle	60°
Supply voltage / current	5 V - 1 A (USB A - USB C)
LED indicator	★ charging ● full
Charge time	2.5 h
Weight	0.11 kg
Dimensions	78.5 x 47.5 x 42 mm
Enclosure rating	IP65; IK07

DELIVERY INCLUDES

USB C power cable (NK USB C 65 405 753),
cardboard box

Ord. number: **65 406 059**

- The HL 400 SENSOR compact headlamp provides a spotlight and floodlight in one. The spotlight's narrow and powerful cone illuminates and reveals every detail of a space while the diffuse, high-intensity floodlight provides a wider field of view for maximum comfort.
- You can switch between lighting modes using a traditional switch. However, the head lamp is also fitted with a smart sensor which allows you to turn the lamp on or off even in cases with dirty hands or when wearing gloves and unable to operate the switch.
- The cornerstone of any high-quality head lamp is high resistance; the HL 400 SENSOR head lamp is rated IP56 for ingress protection and boasts a high impact resistance rating of IK07; it can thus withstand demanding conditions and will serve reliably through heavy rain or if accidentally dropped.
- In its default position, the cone of light points forward to achieve the maximum beam range (up to 150 m), but the angle of the light can be adjusted by up to 60° as needed.
- The head lamp is fitted with a modern, highly elastic, adjustable, and washable strap to ensure maximum comfort during use.
- The dual-beam head lamp can be easily connected to power using the enclosed USB A - USB C cable.



POCKET FLOODLIGHT

FL 1400 FLEXI

Supply voltage	3.7 V
Accumulator capacity	5,200 mAh Li-Ion (19.24 Wh)
Luminous flux	Main light: 15 W 350 lm/8 h
Battery runtime	700 lm/4 h 1,400 lm/2.5 h
LED type	COB LED
LED colour temperature	6,500 K
Adjustable angle	360°
Supply voltage / current	5 V - 2 A (USB A - USB C)
LED indicator	* charging ● full
Weight	0.45 kg
Dimensions	124 x 113 x 35 mm
Enclosure rating	IP65; IK07

DELIVERY INCLUDES

USB C power cable (NK USB C 65 405 753),
cardboard box

Ord. number: 65 406 063

- This flexible, rechargeable pocket floodlight offers three different light settings (350/700/1,400 lm) to provide the best lighting for any environment
- Flexible stand with a powerful magnet allows you to place the lamp anywhere you want at the angle of your choice
- The compact body of the light source is housed in durable nylon polymer and features a magnetic base capable of rotating 360°
- Its ergonomically shaped handle provides a comfortable grip for one hand (BOXER)
- The floodlight is dustproof and waterproof with an IP65 enclosure rating and high impact resistance of IK07 and is suitable for both indoor and outdoor use
- Its built-in battery is easy to recharge by plugging a charging cable into the USB-C port on the light and plugging the other end of the cable into a USB-A port or a suitable USB adapter. You can track the charging process using the charging indicators on the back of the light



3 000 LUMENS MAX |  360° |  IK07 |  IP65 | **POWER BANK** max. 5 V/2 A

FLOODLIGHT WITH POWER BANK

RL 3000 MAX

Supply voltage	7.4 V
Accumulator capacity	4,400 mAh Li-Ion (32.56 Wh)
Luminous flux	Main light: 36 W 750 lm/5.5 h
Battery runtime	1,500 lm/3.5 h 3,000 lm/2 h
Stand	✓
LED type	SMD LED
LED colour temperature	6,500 K
Adjustable angle	90°/360°
Supply voltage / current	15 V - 1.5 A
LED indicator	 charging  full
Power bank	max. 5 V - 2 A
Charge time	3.5 h
Weight	1.45 kg
Dimensions	309 x 223 x 223 mm
Enclosure rating	IP65; IK07

DELIVERY INCLUDES

Charging adapter with cable (AN 15 V-1.5 A 65 406 066),
cardboard box

Ord. number: 65 406 064

- Multi-purpose floodlight with a stand made of cast aluminium and with a unique jointed system for tilting the light up to 90° vertically and 360° horizontally, which allows the light to be pointed in any direction you need
- The RL 3000 MAX flood light can be switched between an extended range of luminosity settings (750/1,500/3,000 lm), with outstanding diffusion and spread of light guaranteed for every setting
- Integrated power bank provides extra energy for additional devices and can operate simultaneously with the floodlight without issue
- Practical handle enables easy portability
- Once the floodlight is turned on, a battery status indicator will activate to show the state of charge of the battery. The battery can be recharged using the enclosed charging cable with a 15 V/1.5 A adapter. The floodlight boasts a IP65 and IK07 enclosure rating, meaning it is resistant to spraying water and impacts, which ensures outstanding durability and long life
- The floodlight can also be used while connected to mains power, even if the battery is fully charged, which allows you to conserve battery power if you have access to a socket on location



21 **LUMENS MAX** | **8h** **runtime** | **3x LED** | **10 m** **beam range** | **58 cm** **telescopic** | **magnetic**

TORCH

3LED-IFL

Battery	4x LR44
Luminous flux	
Runtime	Main light: 1 W 21 lm/8 h
Magnet	
LED type	SMD LED
Adjustable angle	Telescopic head
Weight	0.09 kg
Dimensions	170 x Ø body 15 x Ø head 21 mm 580 x Ø body 15 x Ø head 21 mm (extended)

DELIVERY INCLUDES

4x LR44 batteries, cardboard box

Ord. number: 65 900 511

- Inspection LED torch with 580 mm reach
- Robust metal design for maximum mechanical durability and long life
- Telescopic goose-neck for lighting hard-to-reach places
- Practical magnetic head for extracting metal objects
- Metal clip for carrying in the pocket or hanging on the belt



MULTI-FUNCTIONAL INSPECTION LAMP FL LED 10 M

Supply voltage	3.7 V
Accumulator capacity	5,000 mAh Li-Ion (18.5 Wh)
Luminous flux Battery runtime	1. Spotlight: 3 W 220 lm/12 h (100%) 110 lm/24 h (50%) 2. Main light: 10 W 1,200 lm/3 h (100%) 600 lm/6 h (50%)
LED type	SMD LED
LED colour temperature	6,000 – 7,000 K
Charging	5 V – 2 A (USB A – USB C)
LED indicator	● charging ● full
Charge time	3.0 h
Weight	0.44 kg
Dimensions	218 x 58 x 45 mm
Enclosure rating	IP54; IK07

DELIVERY INCLUDES

Charging adapter AN 5-20 (AC/USB) (65 404 614), charging cable NK LED 10 M (65 404 615), cardboard box

Ord. number: 65 404 610

- Multi-functional FLAT LED technology for the commercial sector and household use, outdoor and sports activities
- Wide range of uses thanks to two lighting modes:
 - 1 – work light (1 000 lm) for lighting open spaces with range of up to 100 m and ability to reduce output to 50% (500 lm)
 - 2 – spotlight (220 lm) for work in confined and hard-to-reach places
- Slim and durable body with unbreakable polycarbonate lenses for indoor and outdoor use – resistant to splashing water (IP 54) and impact (IK 07)
- Wide space lighting effect and flexible design with a pocket clip and magnets
- Simple charging via a USB cable and an adapter from the mains or from other compatible devices with a USB port (PC, power bank, laptop, car, etc.)

REFLECTOR / MULTI-FUNCTIONAL DC LED SPOTLIGHT WITH DUAL POWER SUPPLY SYSTEM



DUAL SYSTEM 1 – powering by Li-Ion AP 74-8.8 accumulator: Ideal for emergency or installation vehicles, rough construction environments without wiring or for private leisure activities. The spotlight's power can be regulated via the control panel on the rear of the accumulator.

DUAL SYSTEM 2 – powering by 12 V adapter AN 12-35: Suitable for industrial shop floors, craft and private workshops or finishing construction work. The spotlight's power cannot be regulated.



LED REFLEKTOR

FL LED 50 ACU

Total power	LED 50 W
Max. luminous flux	5,200 lm
Beam angle	70°
LED service life	30,000 h
DUAL SYSTEM 1	
(Battery) runtime – 100% power	ca. 3 h (5,200 lm)
50% power	ca. 6 h (2,600 lm)
Accumulator voltage / capacity	Li-Ion 7.4 V / 8 800 mAh (65 Wh)
Supply voltage / current	12 V / max. 3.5 A
Accumulator charge time	3.0 h
Weight with accumulator	2.1 kg
DUAL SYSTEM 2	
Supply voltage / current	12 V / max. 3.5 A
Weight without accumulator	1.5 kg
Support for tripod mounting	Yes
Dimensions	265 x 298 x 130 mm
Enclosure ratings	IP54, IK07

DELIVERY INCLUDES

Charging adapter AN 12-35 (65 404 616), charging cable NK LED 50 ACU (65 404 617), AP 74-8.8 Li-ion accumulator (65 404 613), cardboard box

Ord. number: **65 404 612**

- Mobile multifunctional spotlight for the widest range of commercial, household and leisure activities
- 50 W LED spotlight with a luminous flux of 4 500 lm for deep space lighting
- DUAL SYSTEM – specially designed system for both the accumulator and the cabled powering of the spotlight
- Powerful, detachable Li-Ion accumulator with a multi-functional control panel and battery life of up to 6 hours
- The accumulator can be used as a high-capacity power bank by connecting other compatible devices (smartphones, tablets, torches, hybrid screwdrivers etc.) via USB
- Fitted for connection and elevated mounting of the spotlight on the telescopic tripod TL 18
- For indoor and outdoor use: IP 54 enclosure resistant to splashing water, impact resistance IK 07
- Stable magnetic base for safe fastening of the spotlight onto metal surfaces
- The base can be quickly replaced by a telescopic tripod solid steel frame with setting screws for easy and precise targeting of the spotlight

► ACCESSORIES FOR WORK LIGHTS AND SPOTLIGHTS ►



TYPE	DESCRIPTION	Ord. number
AP 74-8,8 Li-ion	Accumulator for spotlight FL LED 50 ACU, 7.4 V, capacity 8.8 Ah, charge time ca 180 min, POWER BANK with USB port, automatic capacity indicator, button control panel for the spotlight	65 404 613
TL 18	Telescopic and flexible tripod for spotlight FL LED 50 ACU, maximum extension 1.8 m	65 404 619
AN 12-35	Charging adapter for spotlight FL LED 50 ACU, 12 V / 3.5 A	65 404 616
NK LED 50 ACU	Charging cable for adapter AN 12-35, length 5 m	65 404 617
CS 5 LED 50	Clamping screw for FL LED 50 ACU spotlight	65 405 156
NK USB C	USB A-USB C charging cable, length 0.5 m HL 400 SENSOR, FL 300 MINI, FL 700 SLIM, FL 1000 MULTI, FL 1400 FLEXI, FL LED 10M	65 405 753
AN 5V-2A	Charging adapter AC-USB A Input: 100-240 V/50-60 Hz Output: 5.0 V/2.0 A HL 400 SENSOR, FL 300 MINI, FL 700 SLIM, FL 1000 MULTI, FL 1400 FLEXI, FL LED 10 M	65 406 065
AN 15V-1,5A	Charging adapter with cable for RL 3000 MAX Input: 100-240 V/50-60 Hz Output: 15 V/1,5 A	65 406 066
NK LED 10 M	USB charging cable for the FL LED 3 M and FL LED 10 M work lights, length 0.5 m (until 2022)	65 404 615
AN 5-20	AC/USB charging adapter, for the FL LED 3 M and FL LED work lights 10 M, 5 V / 2 A	65 404 614





Radio mode
104.5 MHz CH11

narex

MODE

EQ

▶||

▲

▼

OTHER PRODUCTS





JOBSITE RADIO

BT-02

Power supply from the mains	100-240 V
Power supply from the accumulator	7.2 V
Accumulator	Li-Ion 7.2 V/4 800 mAh
FM frequency range (VHF)	87.5-108 Hz
Speaker	2x 10 W
Input	
USB	
AUX	jack 3.5 mm
Bluetooth	4.2
Output USB	5 V/2.5 A power bank
Weight including accumulator (type)	2.6 kg
Protection rating	IP 65

DELIVERY INCLUDES

Li-Ion battery 7.2 V, carton box

Ord. number: 65 405 613

- FM radio: FM 87.5-108 MHz, automatic search and storage of radio stations in memory
- Bluetooth 4.2: compatible with any device equipped with Bluetooth technology
- USB port: for listening to MP3 files and charging most smartphones (5 V / 2.5 A power bank)
- AUX: 3.5 mm jack
- EQ: sound equaliser
- LCD screen: date, time, battery status
- Stereo audio system: 2x 10 W
- Power supply: AC 230 V ~ 50 Hz, DC Li-Ion accumulator 7.2 V / 4 800 mAh / 8 h
- IP65: resistance to water, dust and impact
- Design: compact, robust and lightweight design with a protective rubber-coated, impact-resistant frame

CABLES / RUBBER EXTENSION CABLES WITH REEL AND A FIXED CENTRAL PANEL



fixed reel centre

◀ EXTENSION CABLES ▶

PBN 25 / PBN 50

Length	25 m	50 m
Voltage	230 V~	
Conductor	H05RR-F 3G 1.5 mm ²	
Max. load on wound-up cable	1 100 W	
Max. load on unwound cable	3 200 W	
Protection rating	IP44	
Weight	4.5 kg	9.5 kg

- ▶ Fixed reel centre
- ▶ 4 built-in sockets with self-locking lids
- ▶ Contrasting blue jacket of the rubber cable
- ▶ Robust polished steel frame with rubber handle
- ▶ Reel made of highly durable plastic
- ▶ Ergonomic reeling handle on the side
- ▶ Resettable thermal protection
- ▶ Lug prevents the cable from accidentally unwinding
- ▶ Reel brake to lock the spool in position during transport
- ▶ Resistant to dust and splashing water – IP44

DELIVERY INCLUDES

cardboard box

Ord. number: 65 404 963 (PBN 25)
65 404 962 (PBN 50)



49-PIECE SET OF INDUSTRIAL-CrV HEADS ▶ SH 49-14

Fastening / shank	1/4"
Amount in a pack	49 pcs

- ▶ For manual industrial use
- ▶ High-quality forged chromium-vanadium steel
- ▶ Matte chrome surface finish
- ▶ Ratchet with switching lever and head arrest
- ▶ Robust, solid and stable transport case
- ▶ Neatly arranged organizer

DELIVERY INCLUDES

49-piece set of heads with ratchet (1/4" socket heads: 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm; 1/4" male keys: T8, T10, T15, T20, T25, T27, T30, T40, PH1, PH2, PH3, PZ1, PZ2, PZ3, F4, F5.5, F6.5 mm, H3, H4, H5, H6, M5, M6, M8, M10; other 1/4" accessories: 150 mm ratchet with switchable spindle arresting lever, 148 mm attachment with handle, 100 mm extension, 51 mm extension, 36 mm universal cardan shaft, 110 mm diestock; other accessories: adapter for transitioning from a 1/4" hexagon to a 1/4" square, keys H1.5, H2, H2.5)

Ord. number: 65 404 189

60-PIECE SET OF INDUSTRIAL-CrV HEADS ▶ SH 60-1412

Fastening / shank	1/4"; 1/2"
Amount in a pack	60 pcs

- ▶ For manual industrial use
- ▶ High-quality forged chromium-vanadium steel
- ▶ Matte chrome surface finish
- ▶ Set of two ratchets with switching lever and head arrest
- ▶ Robust, solid and stable transport case
- ▶ Neatly arranged organizer

DELIVERY INCLUDES

60-piece set of heads with ratchet (1/2" socket heads: 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm; 1/2" socket heads for 65 mm spark plugs: 16, 21 mm; other 1/2" accessories: 255 mm ratchet, 125 mm extension, 72 mm universal cardan shaft; 1/4" socket heads: 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm; 1/4" male keys: T8, T10, T15, T20, T25, T30, T40, PH1, PH2, PH3, PZ1, PZ2, PZ3, F4, F5.5, F7 mm, H3, H4, H5, H6; other 1/4" accessories: 150 mm ratchet, 148 mm attachment with handle, 100 mm extension, 51 mm extension, 36 mm universal cardan shaft

Ord. number: 65 404 190

MG WORK GLOVES / COMFORT IN THE WORKSHOP

The Narex MG - MECHANICAL GLOVES are designed for nimble, precise, and safe work with or without tools. The pleasant, functional cut with many practical

accessories provides a high level of protection while also remaining flexible and comfortable.

- Modern design
- Comfortable cut
- Exceptional durability
- Breathable elastic material on the moving parts of the hand
- Reinforced fingers increase protection and durability
- Neoprene, vibration absorbent palm padding
- Wrist strap for firm fastening on the hand
- Gloves designed for precise and comfortable work

MG-L	L	00 648 610
MG-XL	XL	00 649 087
MG-XXL	XXL	00 765 495
MG-XXXL	XXXL	65 403 690



ERGONOMIC MEASURING TAPES / ABX 3, ABX 5

Ergonomic tape measures made of flexible ABS plastic with a rubberised gripping surface. Tape coated with nylon for increased resistance to wear, with a steel dual

end hook. Automatic brake, double-sided, and clear metric scale. Belt clip on the side for secure fastening.

	ABX 3	ABX 5
Tape width	19 mm	22 mm
Horizontal pull-out without support	1.8 m	2.0 m



Ord. number: **65 405 274** (ABX 3)
65 405 276 (ABX 5)



CAMOUFLAGE LINE OF CORDLESS TOOLS





◀ CAMOUFLAGE CORDLESS ▶

► Since time immemorial, mankind has been fascinated by living nature and has used her as a source of inspiration. It was her freedom and unrestrained energy in particular that inspired us in the design of our latest line of NAREX power tools, named CAMOUFLAGE. The new line is exclusively cordless – powered by accumulators – and is designed for all those who enjoy spending their free time under the open sky, far from the convenience and bustle of civilisation.

► Just as living nature fascinates us by her perfection, so too is CAMOUFLAGE's unified, accumulator-based power supply system refined to flawlessness. Just as we admire nature's variety, so too is the tool line varied and diverse to help you in the majority of standard

activities. Thanks to long-life accumulators and power to spare, you will be as free and unrestrained as nature herself. Her ever-present quiet and calm is reflected in the quiet and calm running of the latest generation of electronically controlled, brushless motors. Her nigh-on perfect inconspicuousness has become an inspiration for the unique design that gave CAMOUFLAGE its name.

ECONOMY GARDEN SETS



Package contents: CPP 550 Hedge Trimmer, CVT 300 Grass Trimmer, CST 430 Lawn Mower, 1x CB 2 accumulator (2.0 Ah), 2x CB4 accumulator (4.0 Ah), 2x CN 20 charger

Ord. no.: 65 406 441

◀ CPR 350 4BN ▶

Obsah balení: CPR 350 Chainsaw, CB 4 (2 pcs) accumulator, CN 20 (1 pc) charger

Obj. číslo: 65 406 735



◀ CST 430 4BN ▶

Obsah balení: CST 430 Lawn Mower, CB 4 (2 pcs) accumulator, CN 20 (1 pc) charger

Obj. číslo: 65 406 734



◀ CPP 550 2BN ▶

Obsah balení: CPP 550 Hedge Trimmer, CB 2 (2 pcs) accumulator, CN 20 (1 pc) charger

Obj. číslo: 65 406 736



◀ CVT 300 2BN ▶

Obsah balení: CVT 300 Grass Trimmer, CB 2 (1 pc) accumulator, CN 20 (1 pc) charger

Obj. číslo: 65 406 737



STARTER KIT

Two accumulators and a charger should be among the core accessories for any high-performance tool. While one accumulator is in use, the other is charging.

The Camouflage starter kit includes two powerful 4 Ah CB 4 accumulators and the CN 20 quick charger.

Ord. no.: 65 406 019

The accumulators and the charger can also be bought separately.



Accumulator	CB 2	20 V, Li-Ion, 2.0 Ah, 40 Wh	65 405 968
Accumulator	CB 4	20 V, Li-Ion, 4.0 Ah, 80 Wh	65 405 737
Charger	CN 20	For CB 4, charging time approx. 60 min	65 405 736



PRODUCT LINE EXTENSION

Find freedom thanks to the extended Camouflage product line, both in the workshop and outdoors

Thanks to a long accumulator runtime and plentiful power reserve, you can be perfectly free. Discover all 17 machines carefully chosen for drilling, grinding, cutting and cleaning. They are designed to form the unique ecosystem of Narex Camouflage products in the workshop and in your free time.



◀ **ECCENTRIC SANDER** ▶
CBE 125-3



◀ **DRILL DRIVER** ▶
CSV 13-2

◀ **IMPACT DRILL** ▶
CSP 13-2



◀ **IMPACT WRENCH** ▶
CSR 350-3S



◀ **SABRE SAW** ▶
CPO 150



◀ **ORBITAL SANDER (DELTA)** ▶
CBD 140



◀ **VACUUM CLEANER 2-in-1** ▶
CVP 10-2



◀ **BLOWER 2-in-1** ▶
CVF 230-3



◀ **ŘETĚZOVÁ PILA** ▶
CPR 350

ONE ACCUMULATOR TO RULE THEM ALL

20V

ANGLE GRINDER ▶

CBU 125



JIG SAW ▶

CPL 90



COB LED FLOODLIGHT ▶

CR LED 20



CIRCULAR SAW ▶

CPK 65



LIGHT COMBI HAMMER ▶

CKK 22



OSCILLATING SAW ▶

CPM 3E



GRASS TRIMMER ▶

CVT 300



LAWN MOWER ▶

CST 430



HEDGE TRIMMER ▶

CPP 550







40V
20V + 20V = BATTERY POWER

BL
MOTOR
brushless | 430 mm | max. 500 m² | 25-75 mm

LAWN MOWER ▶

CST 430

Voltage	2x 20 V
No load speed	3 300 rpm
Planing width	430 mm
Mowing height range	6 positions (25-75 mm)
For land area up to	do 500 m²
Capacity of the collection box	50 l
Weight without accumulator	12.5 kg
Weight with CB 4 accumulator	13.8 kg

DELIVERY INCLUDES

Basic CST 430 machine, blade 430 mm, grass collection box mulching adapter, instructions for use, carton box

Ord. no.: 65 406 395

- ▶ Powered by a pair of 20 V accumulators for maximum power and highly effective mowing
- ▶ Control electronics ensure maximum efficiency, continuously evaluate operating characteristics, and adjust motor power to the current load
- ▶ Indication panel on the control handle provides immediate information about the state of charge of the batteries
- ▶ Low noise level contributes to a pleasant working environment and minimal disturbance to people nearby
- ▶ Control lever pointed towards the user facilitates adjustment of mowing height (6 positions)
- ▶ Adjustable handle height for a healthy and comfortable stance when mowing
- ▶ Lightweight body and tall wheels for improved work comfort, even on very uneven terrain
- ▶ Grass collector fill indicator for best results when mowing and collecting grass
- ▶ Lawn mulching thanks to the simple installation of a cover onto the discharge channel
- ▶ Secondary combs on the sides for a clean cut along lawn edges and walls
- ▶ Sturdy central handle for easy portability and storage

Accumulators and charger not included in the basic pack!





TELESCOPIC GRASS TRIMMER

CVT 300

Voltage	20 V
No load speed	8 000 rpm
Max. string swath	300 mm
String diameter	1.6 mm
Secondary handle tilt angle	0°-180°
Trimming head tilt angle	0°-90°
Telescopic handle length	830-1100 mm
Weight without accumulator	1.9 Kg
Weight with CB 4 accumulator	2.5 Kg

DELIVERY INCLUDES

Basic CVT 300 machine, 3× spool with string (1× mounted in the machine, 2× spares), instructions for use, carton box

Ord. no.: 65 406 397

- ▶ Lightweight and compact trimmer for efficient lawn trimming and edging
- ▶ Adjustable telescopic handle for comfortable use, regardless of user height
- ▶ Anti-slip handle with soft grip and integrated safety switch
- ▶ Adjustable detachable handle for comfortable trimming in any position
- ▶ Flexible pivoting head offers 7 trimming positions for versatile use
- ▶ Guide with two robust wheels for trimming in a vertical position
- ▶ Adjustable wire guard to protect nearby plants when trimming
- ▶ Light structure to reduce arm strain during extended use
- ▶ Durable plastic guard ensures safety and cleanliness during work
- ▶ Telescopic design with folding handle to save storage space
- ▶ Delivery includes three spools with 5 m of string

Accumulators and charger not included in the basic pack!



HEDGE TRIMMER / LOW WEIGHT



HEDGE TRIMMER ▶

CPP 550

Voltage	2x 20 V
No load speed	3 000 rpm
Head length	550 mm
Tooth spacing	28 mm
Rear handle rotation angle	-90° / +90°
Weight without accumulator	2.9 kg
Weight with CB 4 accumulator	4.1 kg

DELIVERY INCLUDES

Basic CPP 550 machine, protective guide bar guard, instructions for use, carton box

Ord. no.: 65 406 399

- ▶ Shears with elongated bar for shaping hedges, trimming bushes, and caring for ornamental trees
- ▶ Powered by a pair of 20 V accumulators for maximum power and highly effective trimming
- ▶ Brushless motor for higher power and longer life
- ▶ Control electronics ensure maximum efficiency, continuously evaluate operating characteristics, and adjust motor power to the current load
- ▶ Low noise level contributes to a pleasant working environment and minimal disturbance to people nearby
- ▶ Elongated bar increases reach and volume of removed material, facilitates shaping, and reduces work time
- ▶ Laser-cut and diamond-sharpened blades made of high-quality steel retain high sharpness and durability
- ▶ Indication panel provides immediate information about the state of charge of each battery
- ▶ Rotary rear handle facilitates work in various positions and improves user comfort
- ▶ Low weight and balanced, ergonomic design minimise fatigue

Accumulators and charger not included in the basic pack!





BL
MOTOR
brushless | FAST FIX | 15 m/s
SPEED | 350 mm

CHAIN SAW

CPR 350

Voltage	2x 20 V
Chain speed	15 m/s
No-load speed	8 600 rpm
Quick brake	0.15 s
Guide bar	GB-EPR 35 350 mm
Saw chain	SC 52 DL 3/8" LP 1.3
Oil tank capacity	120 ml
Chain lubrication	AUTO
Chain tensioning system	FastFix
Weight without accumulator	3.3 kg
Weight: saw + bar + chain (without accumulators)	3.9 Kg
Weight: saw + bar + chain (with 2x CB4 accumulators)	5.2 kg

DELIVERY INCLUDES

Basic CPR 350 machine, guide bar (65 406 329), chain (65 406 332), scabbard (65 404 819), instructions for use, carton box

Ord. no.: 65 406 393

- Maintenance-free brushless motor
- Wireless operation at 2x 20 V
- Easy machine maintenance and operation
- Accumulator status indicator panel
- Rundown brake and kickback brake with function for immediate stopping of the saw blade
- Simple and quick tool-free chain tensioning - FastFix
- Automatic chain lubrication extends the life of the guide bar and the chain
- Ergonomically comfortable rear handle for a secure grip
- Oil level window
- Sturdy metal gearbox with long life
- Low noise level contributes to a pleasant working environment and minimal disturbance to people nearby
- Accumulator-powered chainsaws are usually suitable for domestic use, small-scale construction work and garden maintenance

Accumulators and charger not included in the basic pack!





STARLOCK
tool holder

0-19,000 min⁻¹
no-load speed

3°
oscillation angle

OSCILLATING MULTITOOL

CPM 3E

Voltage	20 V
Oscillation speed	5,000-19,000 /min
Oscillation angle	3°
Tool fastening system	Starlock
Weight without accumulator	1.1 kg
Weight with CB 4 accumulator	1.7 kg

DELIVERY INCLUDES

Basic CPM 3E machine, extraction adapter, depth stop, 1x wood saw blade, 1x metal saw blade, 1x scraper blade, backing pad (hook-and-loop), 1x 60 grit sandpaper, 1x 80 grit sandpaper, 1x 120 grit sandpaper, cardboard box

Ord. no.: 65 406 341

- Multi-purpose machine for cutting, sanding, and removing various types of material
- Compact and slim design for comfortable guidance and one-handed control
- Regulation for setting optimal rotation speeds depending on the type of material and work
- Tool-free accessory change
- Starlock universal mounting system enables the use of a wide range of oscillating tools
- LED workspace lighting
- Tool-free adapter enables connection to a dust extractor
- Depth stop for setting a constant depth
- Rubberised gripping surface dampens vibrations and improves work comfort

Accumulators and charger not included in the basic pack!





SLIM DESIGN | **135 x 93 mm** | **FAST FIX** | **0.9 kg**
weight

◀ ORBITAL SANDER (DELTA) ▶

CBD 140

Voltage	20 V
Sanding plate dimensions	135 x 93 mm
Speed	12,000 rpm
Stroke rate	24,000 /min
Stroke length	1.1 mm
Oscillation circumference	2.2 mm
Sandpaper fastening system	Hook-and-loop fastener
Weight without accumulator	0.9 kg
Weight with CB 4 accumulator	1.5 kg

DELIVERY INCLUDES

Basic CBD 140 machine, 1x dust bag, 5x 60 grit sandpaper, 5x 80 grit sandpaper, 5x 120 grit sandpaper, 5x 240 grit sandpaper, cardboard box

Ord. no.: 65 406 347

Set of sandpaper

65 406 356 **20-SET SP-CBD 140**

- ▶ Highly effective for sanding in corners, rebates, edges, and on small surfaces
- ▶ High speed for quick removal of material
- ▶ Compact and slim design for comfortable guidance and one-handed control
- ▶ Built-in dust extraction into a dust bag reduces dustiness during work
- ▶ Rubberised gripping surface dampens vibrations and improves work comfort
- ▶ Tool-free sandpaper fastening via hook-and-loop
- ▶ Optimised ventilation system for efficient motor cooling

Accumulators and charger not included in the basic pack!





BL
MOTOR
brushless | 3 speeds | Ø 125 mm | FAST FIX | 1.0 kg
weight

◀ ECCENTRIC SANDER ▶

CBE 125-3

Voltage	20 V
Backing pad diameter	125 mm
Speed - 1st/2nd/3rd setting	6,000/8,000/12,000 rpm
Stroke rate - 1st/2nd/3rd setting	12,000/16,000/20,000 /min
Stroke length	1.25 mm
Oscillation circumference	2.5 mm
Sandpaper fastening system	Hook-and-loop fastener
Weight without accumulator	1.0 kg
Weight with CB 4 accumulator	1.6 kg

DELIVERY INCLUDES

Basic CBE 125-3 machine, 1x dust bag, 5x 60 grit sandpaper, 5x 80 grit sandpaper, 5x 120 grit sandpaper, 5x 240 grit sandpaper, cardboard box

Ord. no.: 65 406 345

Set of sandpaper

65 406 357 **20-SET SP-CBE 125-3**

- ▶ Highly effective for sanding horizontal and vertical surfaces
- ▶ Extremely compact and ergonomic design to minimise strain when working with one hand
- ▶ Powerful motor with permanent magnet for higher performance and longer life
- ▶ Three operating modes enable adjustment of speed to the specific task
- ▶ Combination of rotation and eccentricity increases grinding/sanding power and prevents deep notching of material
- ▶ Modern electronic control features prevent overloading, reduce wear, and prolong the life of the tool
- ▶ Built-in dust extraction into a dust bag reduces dustiness during work
- ▶ Rubberised gripping surface dampens vibrations and improves work comfort
- ▶ Tool-free sandpaper fastening via hook-and-loop

Accumulators and charger not included in the basic pack!





► BLOWER 2-in-1 ►

CVF 230-3

Voltage	20 V
Max. air speed	63.5 m/s
Max. air flow rate	3.1 m³ /min
Suction power	≥ 4.5 kPa
No-load speed	18,000 rpm
Adjustable handle position	0-180°
Air flow regulation	3-speed
Weight without accumulator	1.2 kg
Weight with CB 4 accumulator	1.8 kg

DELIVERY INCLUDES

Basic CVF 230-3 machine, exhaust, extension nozzle, dust bag, cardboard box

Ord. no.: 65 406 349

- Lightweight and nimble machine for blowing away and vacuuming dirt - blower and vacuum cleaner in one
- Powerful motor capable of generating air speeds of up to 63.5 m/s
- 3 speed settings to get just the right amount of power for the job
- Comfortable vacuuming into a dust bag
- Variable and compact design thanks to 0-180° handle adjustability
- Rubberised nozzle prevents surface scratching
- Ergonomic rubberised rear handle
- Compact body for cleaning in confined spaces

Accumulators and charger not included in the basic pack!



IMPACT WRENCH / WITH TIGHTENING TORQUE OF UP TO 350 Nm



BL
MOTOR
brushless

Nm
impact mechanism

1/2"
holder on the spindle

3 power modes

IMPACT WRENCH

CSR 350-3S

Voltage	20 V
Max. tightening torque	350 Nm
Speed - 1st/2nd/3rd setting	0-1,000/0-2,000/0-2,800 rpm
Max impact rate	3,100 /min
Use range (screw joints)	M5-M20
Max. screw Ø for wood	10 x 100 mm
Max. Ø for drilling in wood	12 mm
Max. Ø for drilling in steel	6 mm
Holder on the spindle	1/2" square, pin
Weight without accumulator	1.2 kg
Weight with CB 4 accumulator	1.8 kg

DELIVERY INCLUDES

Basic CSR 350-3S machine, belt clip, cardboard box

Ord. no.: 65 406 339

- Ideal for maintenance, repair, and construction work with steel and wood
- Suitable for tightening screw joints and structural anchoring elements
- Impact mechanism for high tightening torques without kickback
- Powerful motor with permanent magnet for higher performance and longer life
- Modern electronic control features prevent overloading, reduce wear, and prolong the life of the tool
- 3-speed electronic tightening torque control
- Integrated LED indicator with touch panel
- Automatic LED work light and belt clip for improved comfort during work
- Well-balanced compact body with ergonomic central handle and soft, rubberised surface
- The spindle can be fitted with an AD S12/HEX adapter for drilling and screwdriving (not included, ord. no. 00 633 760)

Accumulators and charger not included in the basic pack!





BL
MOTOR
brushless | 10 l
container volume | 15 Kpa
Suction power | WET and DRY

VACUUM CLEANER 2-in-1

CVP 10-2

Voltage	20 V
Suction power regulation	Two-speed
Suction power – 1st/2nd setting	10/15 Kpa
Max. air flow rate – 1st/2nd setting	0.7/0.9 m ³ /min
Container volume	10 l
Wet vacuum cleaning	YES
Weight without accumulator	3.8 kg
Weight with CB 4 accumulator	4.4 kg
Runtime with CB 4 accumulator (1st/2nd speed setting)	35/20 min

DELIVERY INCLUDES

Basic CVP 10-2 machine, PET filter, suction hose, flat tool, crevice tool, upholstery tool, floor tool, brush tool, 2x 400 mm extension wand, adapter, shoulder strap, cardboard box

Ord. no.: 65 406 337

- Unrestricted mobility during cleaning
- Lightweight and compact body for easy portability
- For dry and wet vacuum cleaning
- Cleaning of standard household dirt, as well as dust from construction sites and workshops
- Integrated blow cleaning function to remove dirt from hard to reach places
- High air flow rate for quick and effective dirt removal
- Two-level power regulation for light and heavy-duty cleaning
- Integrated LED battery status indicator
- Polyethylene dust-repelling filter, water-washable
- Tool magazine in the bottom of the container
- Elastic suction hose can be stretched to up to 3 times its length (up to a length of 2.8 m)
- Wide range of accessories included

Accumulators and charger not included in the basic pack!



NAD MLÝNKEM
286 m

PEŠÍ TRASA KČT

ČESKÁ LÍPA 20 km

2005

DANFOSS

DRILL DRIVER / WITH TIGHTENING TORQUE OF UP TO 65 Nm



65 Nm
max. tightening torque

2
number of
speed settings

13 mm
chuck max.

DRILL DRIVER

CSV 13-2

Voltage	20 V
Max. tightening torque	65 Nm
Speed - 1st setting	0-450 rpm
Speed - 2nd setting	0-1,600 rpm
Max. screw ø for wood	10 mm
Max. ø for drilling in wood	25/40/50*
Max. ø for drilling in steel	13 mm
Chuck range	1.5-13 mm
Spindle thread	1/2"-20 UNF
Weight without accumulator	1.4 kg
Weight incl. CB 4 accumulator	2.0 kg

* spiral bit/Forstner bit/holesaw bit

DELIVERY INCLUDES

Basic CSV 13-2 machine, 1.5-13 mm quick release chuck, belt clip, cardboard Basic Box

Ord. number: **65 405 714**

- Well-balanced body with ergonomic central handle and soft rubberised surface
- Powerful motor with permanent magnet for higher performance and longer life
- Modern electronic control and monitoring features prevent overloading, reduce wear, and prolong the life of the tool
- Robust aluminium gearbox housing improves rigidity and stability of the mounting
- Two-speed all-metal gearbox offers a wide variability of uses
- Adjusting ring allows selecting from 21 levels of tightening torque
- All-metal quick-release chuck with powerful grip and capacity of up to 13 mm
- Automatic spindle lock simplifies bit handling
- Automatic LED work light and belt clip improve comfort during work

Accumulators and charger not included in the basic pack!



IMPACT DRILL / WITH TIGHTENING TORQUE OF UP TO 75 Nm



75 Nm
max. tightening torque

2
number of
speed settings

13 mm
chuck max.

IMPACT DRILL

CSP 13-2

Voltage	20 V
Max. tightening torque	75 Nm
Speed - 1st setting 2nd setting	0-450 rpm 0-1,600 rpm
Impact rate - 1st setting 2nd setting	0-8,500 /min 0-29,750/min
Max. Ø for drilling in brick	12 mm
Max. Ø for drilling in wood	30/45/60*
Max. Ø for drilling in steel	13 mm
Max. screw Ø for wood	10 mm
Chuck range	1.5 - 13 mm
Spindle thread	1/2"-20 UNF
Weight without accumulator	1.7 kg
Weight incl. CB 4 accumulator	2.3 kg

* spiral bit/Forstner bit/holesaw bit

DELIVERY INCLUDES

Basic CSP 13-2 machine, 1.5-13 mm quick release chuck, detachable handle, belt clip, cardboard Basic Box

Ord. number: 65 405 716

- Well-balanced body with ergonomic central handle and a detachable extra handle
- Powerful motor with a permanent magnet for higher performance and longer life
- Modern electronic control and monitoring features prevent overloading, reduce wear, and prolong the life of the tool
- Robust aluminium gearbox housing improves rigidity and stability of the mounting
- Two-speed all-metal gearbox offers a wide variability of uses
- Adjusting ring allows selecting from 23 levels of tightening torque
- All-metal quick-release chuck with powerful grip and capacity of up to 13 mm
- Automatic spindle lock facilitates tool change
- Automatic LED work light and belt clip improve comfort during work

Accumulators and charger not included in the basic pack!



LIGHT COMBI HAMMER / SDS-PLUS



SDS-plus | **2.2 J** | **22 mm**
 tool fastening | impact energy | max. Ø for concrete

COMBI HAMMER CKK 22

CKK 22

Voltage	20 V
Tool fastening	SDS-plus
Impact energy	2.2 J
Recommended Ø for drilling in concrete	5-12 mm
Max. Ø for drilling in concrete/wood/steel	22/20/13 mm
Max. screw Ø for wood	6 mm
Speed	0-1,350 rpm
Impact rate	0-4,750 /min
Fastening neck Ø	46 mm
Weight without accumulator	1.9 kg
Weight incl. CB 4 accumulator	2.5 kg

DELIVERY INCLUDES

Basic CKK 22 machine, detachable handle, depth stop, cardboard Basic Box

Ord. number: 65 405 726

- Low weight, compact shape, and ergonomic design provide higher comfort during work
- Electro-pneumatic hammer-action and SDS-plus tool interface for high efficiency and power
- Powerful motor with permanent magnet for higher performance and longer life
- Three work modes offer a wide variability of use
- Modern electronic control and monitoring features prevent overloading, reduce wear, and prolong the life of the machine
- Robust, ergonomic fastening head facilitates tool change
- Automatic LED work light

Accumulators and charger not included in the basic pack!



ANGLE GRINDER / SLIM DESIGN



SLIM DESIGN | **1,000 W** power | **125 mm** max. disc Ø | **1.6 kg** weight

ANGLE GRINDER ▶

CBU 125

Voltage	20 V
Power	1,000 W
No-load speed	8,000 rpm
Spindle thread	M14
Max. grinding/cutting blade Ø	125 mm
Blade braking time (BK 125/6)	1.6 s
Overload/overheat protection	✓
Weight without accumulator	1.6 kg
Weight incl. CB 4 accumulator	2.2 kg

DELIVERY INCLUDES

Basic CBU 125 machine, AH M8 detachable handle, flange and fastening nut, fastening nut wrench, guard, cardboard Basic Box

Ord. number: 65 405 720

- Well-balanced body with circumference of a mere 145 mm
- Slim design with ergonomic rubberised surface
- Powerful motor with permanent magnet for higher performance and longer life
- Improved protection of the machine thanks to a control unit with monitoring features
- Flat gearbox made of aluminium alloy increases rigidity and stability of gear mountings
- Optimised air flow ensures perfect cooling even at maximum load
- Ergonomic detachable handle ensures a safe grip on the machine
- Spindle lock facilitates blade change
- Guard adjustable without the need for tools

Accumulators and charger not included in the basic pack!





0-3,000 min⁻¹ *stroke speed* | **up to 150 mm** *cutting depth - wood* | **3.2 kg** *weight*

SABRE SAW

CPO 150

Voltage	20 V
Stroke speed	0-3,000 min⁻¹
Stroke length	28 mm
Max. cutting depth:	
aluminium	18 mm
iron	8 mm
wood	150 mm
Weight without accumulator	3.2 kg
Weight incl. CB 4 accumulator	3.8 kg

DELIVERY INCLUDES

Basic CPO 150 machine, cardboard Basic Box

Ord. number: 65 405 718

- Ergonomic design
- Powerful motor with permanent magnet for higher performance and longer life
- Modern electronic control and monitoring features prevent overloading, reduce wear, and prolong the life of the machine
- Quick-change system for the saw blade
- Tool-free support adjustment
- Rubberised front section of the machine - adhesive surface ensures a secure and firm grip in any working position

Accumulators and charger not included in the basic pack!





0°-45°
angle cutting

90 mm
cutting depth - wood

26 mm
stroke length

JIG SAW ▶

CPL 90

Voltage	20 V
Cutting depth:	
wood	90 mm
steel	10 mm
No-load stroke speed	0-2,600 /min
Stroke length	26 mm
Angle cutting	0°-45°
Weight without accumulator	2.4 kg
Weight incl. CB 4 accumulator	3.0 kg

DELIVERY INCLUDES

Basic CPL 90 machine, horizontal stop, extraction adapter, cardboard Basic Box

Ord. number: 65 405 722

- ▶ Ergonomic body with anti-slip handle
- ▶ Powerful motor with permanent magnet for higher performance and longer life
- ▶ Modern electronic control and monitoring features prevent overloading, reduce wear, and prolong the life of the machine
- ▶ Electronic stroke speed regulation keeps settings at the optimal level for cutting
- ▶ Rougher but faster cut when working without pendulum action, increasing the pendulum action level makes the cut gradually cleaner
- ▶ Tool-free saw blade mounting system
- ▶ Automatic LED work light

Accumulators and charger not included in the basic pack!



CIRCULAR SAW / MODERN ELECTRONIC CONTROL AND MONITORING ELEMENTS



5,000 rpm
no-load speed | **185 mm**
saw blade Ø | **65 mm**
cutting depth

CIRCULAR SAW

CPK 65

Voltage	20 V
No-load speed	5,000 rpm
Cutting depth:	
at 90° angle	0-65 mm
at 45° angle	0-43 mm
Angle cutting	0°-45°
Saw blade size	185 x 1.6/1.0 x 20 x 24
Weight without accumulator	3.4 kg
Weight incl. CB 4 accumulator	4.0 kg

DELIVERY INCLUDES

Basic CPK 65 machine, 185 x 1.6/1.0 x 20 x 24 circular saw blade, horizontal stop, hex key, cardboard Basic Box

Ord. number: **65 405 724**

- Modern and practical design focused on easy and comfortable control over the tool
- Powerful motor with permanent magnet for higher performance and longer life
- The shoe is made as an aluminium casting, firm and rigid
- Modern electronic control and monitoring features prevent overloading, reduce wear, and prolong the life of the machine
- Saw tilting allows cutting at 0° to 45° angle
- The blade guard features an integrated sawdust outlet; connecting a dust extractor to the outlet improves work comfort and cleanliness
- Automatic LED work light and belt clip improve comfort during work

Accumulators and charger not included in the basic pack!



LED FLOODLIGHT / WITH POWER BANK FUNCTION



1,000/2,000 lm *luminous flux* | **180°** *tilting* | 

LED FLOODLIGHT

CR LED 20

Voltage	20 V
LED input power	20 W
Luminous flux	max. 2,000 lm
Source	COB LED
Colour temperature	6,500 K
100% lighting mode - 2,000 lm	1.5 h (CB 4)
50% lighting mode - 1,000 lm	3.0 h (CB 4)
Tilt angle of the lamp	180°
USB port - output	5 V / 2 A
Enclosure rating	IP20
Dimensions	185 x 160 x 60
Material	Die cast aluminium + ABS
Weight without accumulator	0.4 kg
Weight incl. CB 4 accumulator	1.0 kg

DELIVERY INCLUDES

Basic CR LED 20 machine, cardboard Basic Box

Ord. number: **65 405 728**

- Bright and even lighting of the workspace
- Combined button controls multiple functions:
 - switch on at 50% power
 - switch on at 100% power
 - switch off
- Connecting to the accumulator via USB allows the light to function as a power bank
- Compact size and low weight

Accumulators and charger not included in the basic pack!



RADIO / PORTABLE WITH BLUETOOTH AND POWER BANK FUNCTIONALITY



◀ JOBSITE RADIO ▶

CBT-02

Power supply from the mains	100-240 V
Power supply from the accumulator	7.2 V
Accumulator	Li-Ion 7.2 V / 4,800 mAh
FM frequency range (VHF)	87.5-108 Hz
Speaker	2× 10 W
Input	
USB	
AUX	3.5 mm jack
Bluetooth	4.2
USB output	5 V / 2.5 A power bank
Weight with accumulator (type)	2.6 kg
Enclosure rating	IP 65

DELIVERY INCLUDES

Instruction manual, Li-Ion accumulator, cardboard box

Ord. no.: 65 406 326

- ▶ FM radio: FM 87.5-108 MHz, automatic search and storage of radio stations in memory
- ▶ Bluetooth 4.2: compatible with any device equipped with Bluetooth technology
- ▶ USB port: for listening to MP3 files and charging most smartphones (5 V / 2.5 A power bank)
- ▶ AUX: 3.5 mm jack
- ▶ EQ: audio equaliser
- ▶ LCD screen: date, time, battery status
- ▶ Stereo audio system: 2× 10 W
- ▶ Power supply: AC 230 V ~ 50 Hz, DC Li-Ion accumulator 7.2 V / 4,800 mAh / 8 h
- ▶ IP65: resistance to water, dust, and impact
- ▶ Compact, robust, and lightweight design with a protective rubber-coated, impact-resistant frame

CHJ HEATED SOFTSHELL JACKET

The Narex heated softshell jacket in a camouflage colour scheme is the perfect accessory for working in cold weather, as well as for normal wear during various outdoor activities. The jacket is breathable and resistant to wind and rain. It features a number of inside and outside pockets of various sizes, venting zips, removable hood, and sleeves with handy thumb holes.

The jacket has a total of three heating zones located by the front pockets and on the back. The heating is powered by a power bank via a USB connector located in the jacket's breast pocket (power bank not included in the basic pack!). Heating power is adjustable to three levels (low/medium/high) using a touch switch. Total heater runtime is dependent on the capacity of the power bank used and on the selected heating mode. The jacket can be washed at 40° C.

TECHNICAL PARAMETERS

Material: 94% Polyester / 6% Spandex

Sizes: XS/S/M/L/XL/2XL/3XL

Supply voltage / current: 5 V / 2 A

Weight by size:

1.41 kg (L)

1.49 kg (XL)

1.53 kg (2XL)

1.65 kg (3XL)

Recommended power bank: Narex PWB 10

Heater runtime with PWB 10: up to 10 hours

Package contents: CHJ heated jacket

Heated softshell jacket – set version including power bank PWB 10

TYPE	DESCRIPTION	ORD. NO.
CHJ-L SET	Heated softshell jacket - size L	65 406 039
CHJ-XL SET	Heated softshell jacket - size XL	65 406 040
CHJ-2XL SET	Heated softshell jacket - size 2XL	65 406 041
CHJ-3XL SET	Heated softshell jacket - size 3XL	65 406 321

POWER BANK

Type	PWB 10
Interface	USB 2.0
Cell types	Lithium-Polymer
Input	Micro USB 5 V/2 A
	USB-C 5 V/2 A
Output	USB 1: 5 V / 1 A
	USB 2: 5 V / 2 A
Capacity	10,000 mAh
Charge time	4-5 hours
Weight	185 g



Ord. number: **65 406 026**



CRP WORK GLOVES

The Narex CRP work gloves in a trendy camo colour scheme are designed for dexterous, precise, and safe work with or without power tools. The pleasant,

functional cut with many practical accessories provides a high level of protection while also remaining flexible and comfortable.

- Attractive and practical camouflage design
- Comfortable and functional cut
- Breathable material with added elastic fibres
- Palm and fingertip protection by thickened artificial leather
- Palm pads to absorb impact and vibrations
- Joint protectors from thermoplastic rubber (TPR)
- Double seam in the most stressed areas
- Wrist strap for firm fastening

Ord. number: 65 405 729 (XL)
65 406 317 (2XL)



CTP 50 MULTI-PURPOSE BAG / TOOL BAG

The robust Narex CTP multi-purpose bag in a trendy camo pattern is designed primarily for storing and carrying cordless power tools. The bag is weatherproof

and provides ample storage space to hold multiple large tools.

- Weatherproof, camouflage design
- Large number of useful pockets
- Variable division of the storage space by hook-and-loop fastened partitions
- Comfortable padded shoulder strap
- Two top handles for ease-of-handling
- Practical rubber grip for comfortable zip operation
- Anti-slip rubber feet
- Base material: Polyester 600D
- Exterior dimensions: 450 x 250 x 340 mm
- Volume: 50 l
- Maximum load capacity 25 kg

Ord. number: 65 405 730



◀ EXPLANATORY NOTES TO ICONS ▶

	Electronic overload protection Prevents the motor from being damaged by a jammed tool
	Rundown brake Braked rundown of the motor for better user safety
	Automatic spindle arrest Enables changing a tool with one hand
	Safety clutch Makes sure the tool doesn't unexpectedly jam
	KICK BACK STOP Turns off the machine should the tool become stuck in the material
	Constant speed The machine's speed remains constant when under load
	Protection against Overheating Prevents motor damage by long-term overload
	SDS-plus For swapping tools quickly (2-4 kg weight category)
	SDS-max For swapping tools quickly (5-10 kg weight category)
	Toggle rotation off For chiselling
	Impact mechanism of the machine For efficient screwing at high tightening torques
	Electronic speed regulation For setting rotation speeds based on the type of material and work
	Left-/right-handed rotation For fastening and unfastening
	Limitation of run-up current for a gradual and safe start-up
	Packaging in T-LOC systainer System for practically storing the machine and its accessories
	FastFix A system that allows you to rapidly change tools without the need for keys
	Two-speed transmission For mechanically setting the desired rotation speed
	Spindle arrest For changing tools quickly
	Ability to switch off hammer action For screwing and drilling into soft materials
	Extraction The machine is equipped with its own extraction system or can be connected to external dust extraction
	Guidance system For the precise guidance of circular saws when cutting

◀ EXPLANATORY NOTES TO ICONS ▶

 1/2"	Fastening on the spindle 1/2" square for changing tools quickly and easily
 3/4"	Fastening on the spindle 3/4" square for changing tools quickly and easily
 1/4"	Fastening on the spindle 1/4" hexagon for changing tools quickly and easily
 Swinging motion of the saw blade	For high cutting output and saw blade protection
 AS	Antistatic Vacuum cleaners with the ability to conduct away static charge
 PC	Press & Clean A system for manually cleaning the filter by equalising pressure
 AC	Auto Clean A system that allows you to automatically clean the filter by equalising pressure
 SIGNAL	Operational display Informs you about the status of the machine
 AB	Automatic self-balancing unit Reduces vibrations by more than 50 %
 Nm	High Torque Machine with high torsional or tightening moment
 AIR FILTER	Air filter Fine polyurethane filter for collecting waste
 OFF	Protection against accidental start-up In case the machine accidentally switches off or a sudden power failure occurs
 Weight	Extraordinarily low machine weight
 SLIM DESIGN	SLIM DESIGN Slim ergonomic build
 Cooling	Automatic dosing of cutting fluid
 BL MOTOR	Brushless ALL-IN-ONE motor More powerful, efficient, economical and tenacious
 Electronic control components	To indicate low voltage, overload, overheating and malfunction
 LED	Automatic LED light For lighting the workspace
 Ergo Fix	ErgoFix patented height adjustment system for comfortable work in a natural, upright stance

Supplier

Narex s.r.o.
Chelčického 1932
470 01 Česká Lípa
Czech Republic

Phone:
+420 481 645 471-2
+420 481 645 227

E-mail: narex@narex.cz
www.narex.cz/en

**Central Repair Service
and Brick and Mortar Shop**

Narex s.r.o.
U Kartounky 3382
470 01 Česká Lípa
Czech Republic

Tel.: +420 481 645 465
E-mail: servis@narex.cz

Find us on:

narex
www.narex.cz